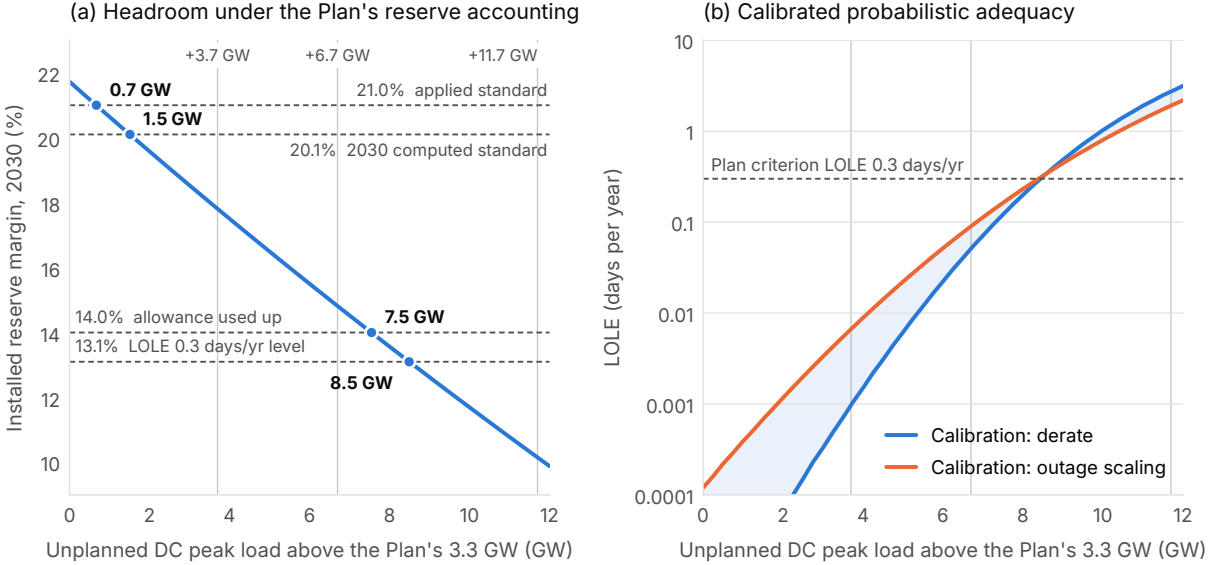
(a) Headroom under the Plan's reserve accounting
+3.7 GW
+6.7 GW
+11.7 GW
0.7 GW
1.5 GW
21.0% applied standard
20.1% 2030 computed standard
14.0% allowance used up
13.1% LOLE 0.3 days/yr level
7.5 GW
8.5 GW
Installed reserve margin, 2030 (%)
Unplanned DC peak load above the Plan's 3.3 GW (GW)
(b) Calibrated probabilistic adequacy
Plan criterion LOLE 0.3 days/yr
Calibration: derate
Calibration: outage scaling
LOLE (days per year)
Unplanned DC peak load above the Plan's 3.3 GW (GW)