

Rugby Intelligent Camera

1st Canto da Silva Delatorre, Tiago *Electrical and informatics department*
INSA Toulouse

Toulouse, France

tcanto-da-si@insa-toulouse.fr 2nd Tassin, Nicolas *Electrical and informatics department*
INSA Toulouse

City, Country

email address or ORCID 3rd Given Name Surname *dept. name of organization (of Aff.)*
name of organization (of Aff.)

City, Country

email address or ORCID 4th Given Name Surname *dept. name of organization (of Aff.)*
name of organization (of Aff.)

City, Country

email address or ORCID 5th Given Name Surname *dept. name of organization (of Aff.)*
name of organization (of Aff.)

City, Country

email address or ORCID 6th Given Name Surname *dept. name of organization (of Aff.)*
name of organization (of Aff.)

City, Country

email address or ORCID

Abstract—Camera-based tracking systems are increasingly used in sports to enhance performance analysis and broadcast production. However, existing solutions are typically expensive and complex, making them inaccessible for amateur clubs with limited resources. This project aims to develop a cost-effective and functional camera tracking solution to, in real time, broadcast and capture the statistics of an amateur rugby match. Our proposition relies on a multi-camera setup which is controlled by a trained computer vision model, YOLO (You Only Look Once). The conducted tests show an accuracy of 80

Index Terms—computer vision, rugby, cost-effective, camera tracking, YOLO

I. INTRODUCTION

The growing availability of computer vision and deep learning technologies has transformed sports broadcasting and performance analysis. Camera-based tracking systems are now widely used in professional contexts, combining multi-camera setups with real-time image processing to follow players

and the ball throughout a match. However, such systems remain complex and expensive, making them largely inaccessible to amateur clubs operating with limited resources. Several approaches have been proposed to automate sports tracking and broadcasting. YOLO-based architectures have demonstrated strong performance for real-time player and ball detection in various sports contexts(), and automated camera selection methods have been developed using spatial and temporal cues to identify the most relevant viewpoint at each moment (). Despite these advances, existing solutions have been designed primarily for professional environments and have not been adapted to the specific constraints of amateur sport. Two gaps remain unaddressed. First, no affordable, fully integrated tracking and broadcasting system has been proposed for amateur clubs. Second, ball detection in rugby presents a particularly underexplored challenge: frequent occlusions by players and an irregular ball trajectory make reliable real-time detection significantly harder than

in sports such as football or basketball. To date, no study has investigated these two problems jointly. This project aimed to develop a cost-effective, autonomous system capable of capturing, processing, and broadcasting amateur rugby matches in real time, combining multi-camera recording, YOLO-based player and ball detection, and a dynamic camera selection module.

II. RELATED WORK

Sports analysis has evolved through AI and computer vision, yet high costs exclude amateur clubs. This work establishes the theoretical foundation for a project aimed at democratizing access to automated video tracking in amateur rugby.

To automate capture, the market uses panoramic stitching [1] or robotic mounts [2]. Real-time detection relies on YOLO-NAS for optimized latency [3]. Because fast-moving balls cause blur, systems integrate temporal context from adjacent frames rather than relying on single images [3], [4].

To track these detections, the Kalman Filter method predicts trajectories, maintaining continuity during occlusions. Fuzzy logic optimizations often refine these predictions to handle abrupt athletic changes, ensuring algorithms correctly link new data to existing tracks without identity switches [5].

To enable real-time camera following, transfer learning is used within 3D Convolutional Neural Network (3D-CNN) architectures. Inflated 3D Networks (I3D) [6] is used to process spatiotemporal information. By inflating pretrained 2D filters into the temporal domain, I3D models overcome the computational bottlenecks of traditional 3D-CNNs, optimizing the balance between recognition accuracy and response latency.

Semantic Segmentation assigns pixel-level classes to isolate game elements utilizing deep models like VGG-16 with dilated convolutions[6], [7]. This approach handles class imbalance via modified cross-entropy loss, achieving high Mean IOU scores. Optical Flow quantifies motion dynamics, evolving from sparse Lucas–Kanade and dense Horn–Schunck methods[8], [9], [10] to deep architectures (FlowNet, PWC-Net) that maintain accuracy under occlusions. Action and Event Recognition combines CNN-based spatial features with LSTM-based temporal modeling to detect events in near real-time [4], [11], with robustness enhanced by multi-modal inputs like ball trajectories [12], [13]. Finally, Camera Localization employs a two-stage PTZ calibration approach [14]. By utilizing deep descriptors (SuperPoint, SuperGlue) and the PTZ-IBA algorithm to minimize reprojection errors[15], [16], the system achieves high precision with efficient online processing[17].

Robust visual tracking relies on the integration of

detection, temporal prediction, and dynamic state estimation rather than on perfect frame-by-frame detection. Al-Hadrusi and Sarhan [14] propose a decision-based framework combining tracking, prediction, and quality evaluation (confidence, visibility, occlusions, resolution), enabling tracking continuity during short-term observation losses. These principles are directly applicable to rugby ball tracking with a fixed camera, where the ball is small, fast-moving, and frequently occluded.

In monocular settings, Xavier *et al.* [16] show that effective tracking can be formulated directly in the image plane using dynamic estimation corrected by visual feedback, without explicit 3D reconstruction. Complementarily, Labbé *et al.* [15] ground tracking in nonlinear observer theory, combining noisy visual measurements with dynamic models to maintain coherent state estimates (position and velocity) during occlusions or degraded observations.

To enable affordable rugby analysis on a Raspberry Pi, this project prioritizes computational efficiency. We conclude that a faster tracking method like YOLO-NAS is the optimal detection model due to its speed, while Kalman Filtering provides essential trajectory prediction during fast motion or occlusions. We reject complex 3D reconstruction in favor of robust 2D tracking directly on the image plane. This combination of lightweight detection and mathematical prediction ensures the system maintains real-time performance despite the hardware's strict processing limits.

III. TECHNICAL CHOICES (EXPLAINING HOW WE APPROACHED THE PROBLEM)

A. Maintaining the Integrity of the Specifications

The IEEEtran class file is used to format your paper and style the text. All margins,

IV. OUR WORK

We can change the order of the project aswell

A. YOLO Model

A model of Artificial Intelligence is a trained code to learn patterns based on a database[citar qualquer coisa que defina um modelo]. In between the existent models, there is the model YOLO whose algorithm treats the image only one time (You Only Look Once).

Models like YOLO have faster responses to the video's processing, so they are usually used for real time processing, autonomus cars, monitoring, etc. The detection of plany of objects at the same time is also a caracteristic of these models, but the main reason we chose YOLO as our model was to process efficiently and with high speed.

To be able to use YOLO in python, we used the library Ultralytics[citaaar] which makes simpler the utilisation of pre-trained models, image detection and others uses of computer vision. As so, the Figure 1 **ultralytics' models** compares the diferentes versions of YOLO's models by latency and precision of detection. Therefore, considering the speed as main goal to track in real time during a rugby match, we chose to work with YOLOv8 version.

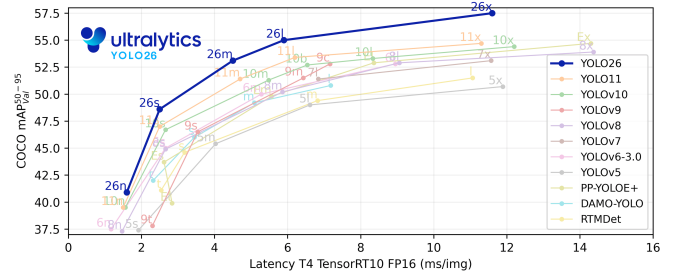


Fig. 1. Comparaison des modèles YOLO supportés par Ultralytics. Source : Ultralytics **ultralytics' models**

Nevertheless, the Ultralytics website also presents the performance metrics of differents models of the chosen version as shown at the Figure 2 **ultralytics' models**. To the image processing, tests were made to choose the one with good balance between accuracy and processing time.

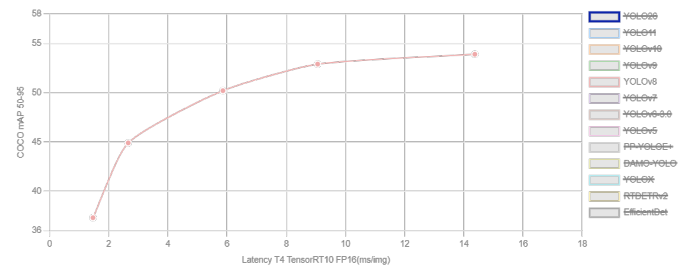


Fig. 2. Courbe de performance des différentes variantes du modèle YOLOv8. Source : Ultralytics **ultralytics' models**

The version of the chosen model was decided by made using one frame taken from a video recorded in the real situation of a amateur match, the goal

of this article, in each of the models offered by Ultralytics. The Table I, shows the results obtained in terms of processing time and quality of detection.

TABLE I
COMPARISON OF YOLOv8 MODEL VARIANTS IN THE SAME FRAME.

Model	Detected Objects	Inference	Total Time	FPS
YOLOv8n	15 persons	61.8 ms	66.0 ms	15.15
YOLOv8s	18 persons	137.5 ms	140.8 ms	7.10
YOLOv8m	21 persons	206.2 ms	208.8 ms	4.79
YOLOv8l	22 persons	616.8 ms	621.5 ms	1.61
YOLOv8x	22 persons	653.5 ms	657.2 ms	1.52

Based on these results and aiming for fast processing, we chose YOLOv8n because, even though it does not recognize as many players as the more robust models, it is more than ten times faster.

Another important conclusion is that increasing the size of the YOLOv8 model does not necessarily lead to a proportional improvement in detection performance like YOLOv8x which does not perform more efficiently on the image than YOLOv8l, even though it requires more processing time.

Although the larger models detect more players, their processing time increases significantly, which makes them less suitable for real-time video analysis. To track the focus of a rugby match, we agreed that the most important thing we should track is the ball, but in rugby the ball is small and always hidden between the players or very close to their chest, causing a big problem for the model's identification of the ball. In order to solve this problem, we added the class player; this implies that the players will also be identified by the model.

In rugby, the teams usually place themselves in lines of attack and defense, so, normally the point of interest will take place where the greatest number of players are. With both classes, we can already create a working tracking model.

The world of computer vision developers is growing and one of the biggest communities is the Roboflow Universe, which we can find a great number of models and datasets. The project Rugby Detection Computer Vision Model **b8** was the closest to our project's needs, and the pictures used in this dataset are similar to the images we captured in an INSA AS match.

After testing the model from the project **b8** in some images from the captured match (Fig. 3 to Fig. 5), positive results were achieved: the model

responds well to the images, identifying a big number of player and the ball. Some problems were: confusing the arbitrator with a player, not identifying all the players, and sometimes not seeing the ball.



Fig. 3. Test image 1, used model from Roboflow**b8**.



Fig. 4. Test image 2, used model from Roboflow**b8**.



Fig. 5. Test image 3, used model from Roboflow**b8**.

Unfortunately, the model **b8** isn't accessible to download, so it wouldn't be possible to use in a real time application, because for every frame the Roboflow repository would have to be accessed on the internet, increasing the cost and delay of the

image processing.

To solve the presented problem, the project's dataset **b8** was cloned and a new AI model was trained, hoping to achieve the same results as the previous. Four models were created, two with yolov8n, one with yolov8s and the last with yolov8m; they were all tested in an image not from the dataset [??? Show images of the test???].

These models aren't as good as the previous one, but they are functional for video analyses and can be used for real-time applications.

IMAGES COMPARISON

To validate our models, we tested it in a video of an INSA AS match, but the power of the available GPU wasn't enough to analyze a nineteen second video (with 1141 frames). So, we couldn't validate our models in a hole video but, analyzing in a smaller video, we can see some problems of players and ball identification, showing how the project would look like in a real-time solution.

Regarding the YOLO model we can conclude that this solution works for identification of our needs to choose the best camera but, trying to find a low-cost solution for the amateur clubs we arrived at a lack of computing power that probably will increase the cost of this approach.

To improve this project, we plan on using another YOLO model **b9** to see the statistics of the game as well, identifying tackle, penalty kick, throw-in, scrum, and other similar rugby situations that our other model can't identify. Another aimed improvement is to create a system **b9** so the model could be able to after identifying the players, separate them between team A and team B. The system consists of a Sigmoid loss language image pre-trained **b9** (extract color information from the player's shirt), associated with an UMAP **b9** (compact the previous information) and a Kmeans **b9** (sort both teams). These improvements would highly increase the quality of the performance analysis of the teams.

B. Video Positioning teams part

- Use either SI (MKS) or CGS as primary units. (SI units are encouraged.) English units may be used as secondary units (in parentheses). An exception would be the use of English units as identifiers in trade, such as "3.5-inch disk drive".

C. Video Acquisition and Transmission Architecture

Real-time automated tracking of amateur rugby players imposes strict constraints regarding bandwidth, latency, and hardware costs. This section details the technological choices made to ensure a fluid and synchronized video stream to the central processing unit.

D. Capture Device Choice

Several capture solutions were evaluated to meet the requirements of the multi-camera tracking project. The use of cameras on motorized platforms was initially considered for its dynamic tracking capability—which could have reduced the number of cameras needed and thus the total cost. However, extreme sensitivity to control delays and prohibitive costs led to its rejection. Similarly, solutions based on microcontrollers such as Arduino, while inexpensive, offered insufficient acquisition performance and resolution for exploitation via YOLOv8 detection models.

Ultimately, smartphones were selected as the capture units. These devices offer an optimal compromise:

- **Image Quality** : High-resolution sensors capable of providing images that can be processed by the YOLO model
- **Cost** : Utilization of existing hardware, drastically reducing the initial investment.
- **Wireless Capability** : 4G/5G cellular and Wi-Fi connection are embedded.

E. Evaluation of Streaming Protocols

To route the video streams from the smartphones to the processing computer, three main protocols were compared:

Protocol	Infra-structure	Latency	Stability / Cost
SRT	4G / 5G	200 ms – 500 ms	Excellent; high subscription costs
RTMP	4G/5G + remote server	2000ms	Industry standard (Youtube, Twitch); requires a server
HTTP (Local)	Wi-Fi (router)	50 ms – 150 ms	Excellent stability; no recurring cost

The **HTTP protocol over a local network** was selected. Unlike cellular solutions (SRT/RTMP) that depend on public network load and incur data costs, the local network allows full control, high stability, and minimizes latency.

F. Local Network Implementation and Topology

The network architecture put in place relies on the creation of a **high-performance private Wi-Fi network** (using a HUAWEI WiFi AX3-type router). This configuration makes it possible to avoid potential interference with the public networks of stadiums.

The system is structured as follows:

- 1) **Wireless transmission:** Two smartphones transmit their respective streams to the central access point via the HTTP protocol. Tests in real conditions validated an effective range of **80 metres**, covering a significant portion of the playing surface.
- 2) **Downstream link:** The router is connected to the processing computer (YOLOv8 computing unit) via a gigabit Ethernet connection. This wired link ensures that the bottleneck does not occur at the final data reception stage.
- 3) **Centralised processing:** The computer simultaneously receives the four streams to perform player detection and tracking.

This communication layer serves as the foundation for the Camera Score Algorithm, which must ingest these concurrent streams and dynamically prioritize the optimal feed based on the proximity of the tracked player or ball to the camera's optical axis.

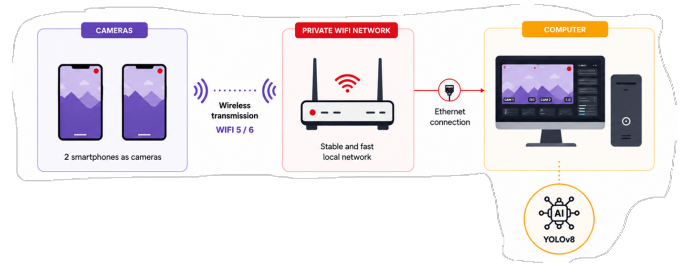


Fig. 6. Network topology: two smartphones transmit wirelessly via HTTP to a private Wi-Fi router, which forwards data via gigabit Ethernet to the processing computer.

G. Camera score algorithm

Please use “soft” (e.g., $\text{eqref}\{Eq\}$) cross references instead

H. IHM

- The word “data” is plural, not singular.

An excellent style manual for science writers is **b7**.

I. Authors and Affiliations

The class file is designed for, but not limited to, six authors. A minimum of one author is required for all conference articles. Author names should be listed starting from left to right and then moving down to the next line. This is the author sequence that will be used in future citations and by indexing services. Names should not be listed in columns nor group by affiliation. Please keep your affiliations as succinct as possible (for example, do not differentiate among departments of the same organization).

J. Identify the Headings

Headings, or heads, are organizational devices that guide the reader through your paper. There are two types: component heads and text heads.

Component heads identify the different components of your paper and are not topically subordinate to each other. Examples include Acknowledgments and References and, for these, the correct style to use is “Heading 5”. Use “figure caption” for your Figure captions, and “table head” for your table title. Run-in heads, such as “Abstract”, will require you to apply a style (in this case, italic) in addition to the style provided by the drop down menu to differentiate the head from the text.

Text heads organize the topics on a relational, hierarchical basis. For example, the paper title is the primary text head because all subsequent material relates and elaborates on this one topic. If there are two or more sub-topics, the next level head (uppercase Roman numerals) should be used and, conversely, if there are not at least two sub-topics, then no subheads should be introduced.

K. Figures and Tables

a) *Positioning Figures and Tables:* Place figures and tables at the top and bottom of columns. Avoid placing them in the middle of columns. Large figures and tables may span across both columns. Figure captions should be below the figures; table heads should appear above the tables. Insert figures and tables after they are cited in the text. Use the abbreviation “Fig. 7”, even at the beginning of a sentence.

TABLE II
TABLE TYPE STYLES

Table Head	Table Column Head		
	Table column subhead	Subhead	Subhead
copy	More table copy ^a		

^aSample of a Table footnote.



Fig. 7. Example of a figure caption.

Figure Labels: Use 8 point Times New Roman for Figure labels. Use words rather than symbols or abbreviations when writing Figure axis labels to avoid confusing the reader. As an example, write the quantity “Magnetization”, or “Magnetization, M”, not just “M”. If including units in the label, present them within parentheses. Do not label axes only with units. In the example, write “Magnetization (A/m)” or “Magnetization {A[m(1)]}”, not just “A/m”. Do not label axes with a ratio of quantities and units. For example, write “Temperature (K)”, not “Temperature/K”.

ACKNOWLEDGMENT

The preferred spelling of the word “acknowledgment” in America is without an “e” after the “g”. Avoid the stilted expression “one of us (R. B. G.) thanks . . .”. Instead, try “R. B. G. thanks . . .”. Put sponsor acknowledgments in the unnumbered footnote on the first page.

REFERENCES

Please number citations consecutively within brackets **b1**. The sentence punctuation follows the bracket **b2**. Refer simply to the reference number, as in **b3**—do not use “Ref. **b3**” or “reference **b3**” except at the beginning of a sentence: “Reference **b3** was the first . . .”

Number footnotes separately in superscripts. Place the actual footnote at the bottom of the column in which it was cited. Do not put footnotes in the abstract or reference list. Use letters for table footnotes.

Unless there are six authors or more give all authors’ names; do not use “et al.”. Papers that have not been published, even if they have been submitted for publication, should be cited as “unpublished” **b4**. Papers that have been accepted for publication should be cited as “in press” **b5**. Capitalize only the first word in a paper title, except for proper nouns and element symbols.

For papers published in translation journals, please give the English citation first, followed by the original foreign-language citation **b6**.

REFERENCES

- [1] J. M. Taxbol, H. B. TEISBÆK, and K. REINICKE, “Computer-implemented method for automated detection of a moving area of interest in a video stream of field sports with a common object of interest,” U.S. Patent 11310418B2, Apr. 19, 2022. Accessed: Dec. 12, 2025. [Online]. Available: <https://patents.google.com/patent/US11310418B2/en?assignee=veo+Technologies&oq=veo+Technologies>

- [2] M. Linderöth, H. Ardö, and K. Josephson, "System and method for providing virtual pan-tilt-zoom, PTZ, video functionality to a plurality of users over a data network," U.S. Patent 10834305B2, Nov. 10, 2020. Accessed: Dec. 12, 2025. [Online]. Available: <https://patents.google.com/patent/US10834305B2/en?assignee=spiideo&oq=spiideo>
- [3] A. Biró, A. I. Cuesta-Vargas, and S. M. Szilágyi, "Predictive sports strategy approach using YOLO and YOLO-NAS in performance sports," in *2023 IEEE 21st Jubilee International Symposium on Intelligent Systems and Informatics (SISY)*, ISSN: 1949-0488, Sep. 2023, pp. 000 303–000 308. DOI: 10.1109/SISY60376.2023.10417876 Accessed: Dec. 18, 2025. [Online]. Available: <https://ieeexplore.ieee.org/document/10417876/>
- [4] M. Xu, "YOLO-based framework with temporal context and network analysis for real-time basketball video understanding," *Informatica*, vol. 49, no. 27, Jul. 3, 2025, ISSN: 1854-3871. Accessed: Dec. 18, 2025. [Online]. Available: <https://www.informatica.si/index.php/informatica/article/view/8657>
- [5] S. M. M. Yousefi, S. S. Mohseni, H. Dehbovid, and R. Ghaderi, "Tracking of moving human in different overlapping cameras using kalman filter optimized," *EURASIP Journal on Advances in Signal Processing*, vol. 2023, no. 1, p. 114, Nov. 6, 2023, ISSN: 1687-6180. DOI: 10.1186/s13634-023-01078-z Accessed: Dec. 18, 2025. [Online]. Available: <https://asp-urasipjournals.springeropen.com/articles/10.1186/s13634-023-01078-z>
- [6] S. Xie, C. Sun, J. Huang, Z. Tu, and K. Murphy, *Rethinking spatiotemporal feature learning: Speed-accuracy trade-offs in video classification*, Jul. 27, 2018. DOI: 10.48550/arXiv.1712.04851 arXiv: 1712.04851[cs]. Accessed: Dec. 18, 2025. [Online]. Available: <http://arxiv.org/abs/1712.04851>
- [7] Q. Li, J. Lei, C. Ren, Z. Peng, and J. Hong, "Research on sports image classification method based on SE-RES-CNN model," *Scientific Reports*, vol. 14, no. 1, p. 19087, Aug. 17, 2024, ISSN: 2045-2322. DOI: 10.1038/s41598-024-69965-5 Accessed: Dec. 18, 2025. [Online]. Available: www.nature.com/articles/s41598-024-69965-5
- [8] OpenCV Documentation, *Optical flow tutorial*, https://docs.opencv.org/3.4/d4/dee/tutorial_optical_flow.html, OpenCV tutorial on optical flow concepts and implementation (Lucas–Kanade, dense flow), accessed 2025.
- [9] Scaler Topics, *Motion estimation using optical flow*, <https://www.scaler.com/topics/motion-estimation-using-optical-flow/>, On-line article on motion estimation with optical flow techniques, accessed 2025, 2025.
- [10] Viso.ai, *Optical flow – everything you need to know*, <https://viso.ai/deep-learning/optical-flow/>, Blog post on optical flow in deep learning and motion estimation, accessed 2025, 2024.
- [11] A. Poms, W. Crichton, P. Hanrahan, and K. Fatahalian, "Scanner: Efficient video analysis at scale," *ACM Transactions on Graphics*, vol. 37, no. 4, pp. 1–13, Aug. 31, 2018, ISSN: 0730-0301, 1557-7368. DOI: 10.1145/3197517.3201394 arXiv: 1805.07339[cs]. Accessed: Dec. 19, 2025. [Online]. Available: <http://arxiv.org/abs/1805.07339>
- [12] W. Wu, M. Xu, Q. Liang, L. Mei, and Y. Peng, "Multi-camera 3d ball tracking framework for sports video," *IET Image Processing*, vol. 14, no. 15, pp. 3751–3761, 2020, eprint: <https://ietresearch.onlinelibrary.wiley.com/doi/pdf/10.1049/iet-ipr.2020.0757>, ISSN: 1751-9667. DOI: 10.1049/iet-ipr.2020.0757 Accessed: Oct. 31, 2025. [Online]. Available: <https://onlinelibrary.wiley.com/doi/abs/10.1049/iet-ipr.2020.0757>
- [13] R. Zhang, L. Wu, Y. Yang, W. Wu, Y. Chen, and M. Xu, "Multi-camera multi-player tracking with deep player identification in sports video," *Pattern Recognition*, vol. 102, p. 107260, Jun. 1, 2020, ISSN: 0031-3203. DOI: 10.1016/j.patcog.2020.107260 Accessed: Oct. 31, 2025. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0031320320300650>
- [14] Y. Al-Hadrusi and S. Sarhan, "Efficient control of ptz cameras in automated video surveillance systems," *International Journal of Video & Image Processing and Network Security*, vol. 12, no. 2, pp. 1–11, 2012,

Accessed: 2025. [Online]. Available: https://nabil.eng.wayne.edu/_resources/pdf/efficient-control-ptz.pdf

- [15] M. Labbé, P. Morin, and C. Samson, “Vision-based tracking and control using nonlinear observers,” in *Proceedings of the IFAC Workshop on Nonlinear Control Systems (NECSYS)*, 2010, pp. 1–6. [Online]. Available: <https://necsys2010.inrialpes.fr/files/2010/09/0060.pdf>
- [16] J. Xavier, R. Pacheco, and H. Araujo, “Visual servoing and tracking using a monocular camera,” in *Proceedings of the IEEE International Conference on Robotics and Automation (ICRA)*, 2001, pp. 118–123. [Online]. Available: <https://www-sop.inria.fr/members/Philippe.Martinet/publis/2001/icra01xavier.pdf>
- [17] Move ’N See, *Pix4team – automatic camera system for sports*, <https://shop.movensee.com/en/products/pix4team-automatic-camera-sports.html>, Commercial product description, accessed 2025, 2024.