

ADVANCED NETWORK SECURITY AND ARCHITECTURES

METI

Report Module 2 [EN]

Authors:

José Oliveira (103771)

Afonso Mendes (116024)

Tiago Videira (116069)

jose.novais.oliveira@tecnico.ulisboa.pt

afonsofmenDES@tecnico.ulisboa.pt

tiago.g.videira@tecnico.ulisboa.pt

Group 3

Contents

1	Introduction	2
2	IKEv1 with Pre-Shared Keys	3
3	IKEv1 with Digital Signatures	4
3.1	Introduction	4
3.2	Topology Overview	4
3.3	PKI Installation Verification	4
3.3.1	CA Configuration and Certificate (RA)	4
3.3.2	Router Certificates (R1)	5
3.3.3	RSA Public Keys (R1 and R2)	6
3.3.4	Summary	8
3.4	SCEP Enrollment Analysis	8
3.4.1	CA Certificate Retrieval	8
3.4.2	Certificate Enrollment Request	9
3.5	Encrypted ICMP Traffic Analysis	10
3.6	ISAKMP and SA Re-establishment Analysis	12
3.7	Peer Public Key Storage Verification	13
3.8	SCEP Messages Observed After Router Restart	14
3.9	Certificate Revocation and Authentication Failure	15
3.9.1	SCEP and Certificate Validation Traffic	15
3.9.2	Failed ISAKMP Negotiation	16
3.9.3	Absence of IPSec Security Associations	17
3.9.4	Explanation of Communication Failure	18

1 Introduction

2 IKEv1 with Pre-Shared Keys

3 IKEv1 with Digital Signatures

3.1 Introduction

This section describes the configuration and analysis of IPsec VPN using IKEv1 with digital certificates (PKI-based authentication using SCEP). The objective is to replace pre-shared keys with RSA signatures issued by a Certification Authority (CA).

3.2 Topology Overview

RA operates as the Certification Authority (CA) and NTP server. R1 and R2 establish an IPsec tunnel authenticated using RSA signatures and certificates obtained through SCEP enrollment.

3.3 PKI Installation Verification

The Certification Authority (CA) and router certificates were verified using IOS show commands.

3.3.1 CA Configuration and Certificate (RA)

The CA is configured on router RA and operates in automatic enrollment mode.

```
RA#show crypto pki server
Certificate Server myCA:
  Status: enabled
  State: enabled
  Server's configuration is locked (enter "shut" to unlock it)
  Issuer name: cn=saarCA
  CA cert fingerprint: 46CB9C10 CC370311 8CFCB545 E4DD2F58
  Granting mode is: auto
  Last certificate issued serial number (hex): 1
  CA certificate expiration timer: 16:17:23 UTC May 14 2029
  CRL NextUpdate timer: 22:17:23 UTC May 15 2026
  Current primary storage dir: nvram:
  Database Level: Minimum - no cert data written to storage
```

The CA certificate installed on RA confirms that RA is acting as a trusted root authority:

```
RA#show crypto ca certificate
CA Certificate
  Status: Available
  Certificate Serial Number (hex): 01
  Certificate Usage: Signature
  Issuer:
    cn=saarCA
  Subject:
```

```
cn=saarCA
Validity Date:
  start date: 16:17:23 UTC May 15 2026
  end   date: 16:17:23 UTC May 14 2029
Associated Trustpoints: myCA
Storage: nvram:saarCA#1CA.cer
```

The detailed certificate view confirms RSA key usage and X.509 extensions:

```
RA#show crypto ca certificate verbose
CA Certificate
Status: Available
Version: 3
Certificate Serial Number (hex): 01
Certificate Usage: Signature
Issuer:
  cn=saarCA
Subject:
  cn=saarCA
Validity Date:
  start date: 16:17:23 UTC May 15 2026
  end   date: 16:17:23 UTC May 14 2029
Subject Key Info:
  Public Key Algorithm: rsaEncryption
  RSA Public Key: (1024 bit)
Signature Algorithm: MD5 with RSA Encryption
Fingerprint MD5: 46CB9C10 CC370311 8CF5B545 E4DD2F58
Fingerprint SHA1: 0B6BF47E F0932FC1 54A33FA8 4C1F48D1 80083958
X509v3 extensions:
  X509v3 Key Usage: 86000000
    Digital Signature
    Key Cert Sign
    CRL Signature
  X509v3 Subject Key ID: 42BD5391 0D07D957 6CC26630 AABA09E4 A93162E2
  X509v3 Basic Constraints:
    CA: TRUE
  X509v3 Authority Key ID: 42BD5391 0D07D957 6CC26630 AABA09E4 A93162E2
  Authority Info Access:
Associated Trustpoints: myCA
Storage: nvram:saarCA#1CA.cer
```

3.3.2 Router Certificates (R1)

R1 successfully enrolled with the CA and received both the CA certificate and its own identity certificate:

```
R1#show crypto pki certificates
```

Certificate

Status: Available
Certificate Serial Number (hex): 03
Certificate Usage: General Purpose
Issuer:
 cn=saarCA
Subject:
 Name: R1
 Serial Number: 9S08DYF8WAKSOLHEG3ZVL
 hostname=R1+serialNumber=9S08DYF8WAKSOLHEG3ZVL
Validity Date:
 start date: 16:33:16 UTC May 15 2026
 end date: 16:33:16 UTC May 15 2027
Associated Trustpoints: myTrustpoint

The CA certificate is also stored locally to validate the trust chain:

CA Certificate

Status: Available
Certificate Serial Number (hex): 01
Certificate Usage: Signature
Issuer:
 cn=saarCA
Subject:
 cn=saarCA
Validity Date:
 start date: 16:17:23 UTC May 15 2026
 end date: 16:17:23 UTC May 14 2029
Associated Trustpoints: myTrustpoint

3.3.3 RSA Public Keys (R1 and R2)

The RSA public keys generated on R1 and R2 are extracted using the following IOS command:

```
show crypto key mypub rsa
```

R2 RSA Public Key:

```
R2#show crypto key mypub rsa
% Key pair was generated at: 16:32:05 UTC May 15 2026
Key name: R2
Key type: RSA KEYS
Storage Device: private-config
Usage: General Purpose Key
Key is not exportable.
Key Data:
```

```

30819F30 OD06092A 864886F7 OD010101 05000381 8D003081 89028181 00C337FE
B0DAEE4D 444B0AF7 A19A73B3 2D2FCD5E 27E09095 3017E393 2F27F7AA 581894E6
5E7F50B3 0454ACF2 FD1E8E24 F91125DD 6D611D93 611D70AD 36C59F6F EAEE003C
7704B6DB 41D9A165 27252864 17170DA2 F38A68D4 46C91133 36DBCBC5 B09AD90E
0F05531B F7ABB4A5 0B954C0F 389C2195 3DE377FF 7FE63FB3 B02DF189 35020301
0001

```

% Key pair was generated at: 16:57:46 UTC May 16 2026

Key name: R2.server

Key type: RSA KEYS

Temporary key

Usage: Encryption Key

Key is not exportable.

Key Data:

```

307C300D 06092A86 4886F70D 01010105 00036B00 30680261 00A38B5F B33F29E4
E5E30AFB 512084C9 0A89E015 BCA1569A C10C686B B79BD8EC C3C25CAD 6EE74C8F
C891E5FF 1B042503 710EC940 65712523 377F2776 77CDC4C0 D7D61754 57C88063
19BF191B F48130CC 327EF733 1F877D95 5CB74450 AEEF7E99 45020301 0001

```

R1 RSA Public Key:

R1#show crypto key mypub rsa

% Key pair was generated at: 16:31:43 UTC May 15 2026

Key name: R1

Key type: RSA KEYS

Storage Device: private-config

Usage: General Purpose Key

Key is not exportable.

Key Data:

```

30819F30 OD06092A 864886F7 OD010101 05000381 8D003081 89028181 00DF87BB
11BD33EE C4E9DF4A C2FF2CCB 2ECCEFF9 713AAA45 633ADE4A C188109E 88680D67
FBOA2F20 67257007 79DB3616 75D5459A 4898DE69 E74E80BA 77C993E8 A4B70D41
00D1D2FB E37BF0E3 89C8BEEE 9830712E 8A4C13DC E30C5C72 D72FEDF2 A221F6DB
9A1A1B8F 9A69BC61 3700CA1B B66DB044 72F24609 E0C1FE8D 24D1B3DA DD020301
0001

```

% Key pair was generated at: 16:57:42 UTC May 16 2026

Key name: R1.server

Key type: RSA KEYS

Temporary key

Usage: Encryption Key

Key is not exportable.

Key Data:

```

307C300D 06092A86 4886F70D 01010105 00036B00 30680261 0095CC14 73EE9BA8
1B0A40A6 E3EE90C1 BC2FAADF 2D532270 160D9039 C19C40CA 6A4E54B5 BAB8892C
D266AE9A 53210F58 876755F6 381C44B6 5D71F57F 35705BC5 3E8D9746 61833A6A
DB5E740B 8A22A486 83EE7AFA ACAB3798 27D03FC2 7C6EA875 FD020301 0001

```


Both routers generate 1024-bit RSA key pairs used for digital signature authentication during IKEv1 Phase 1.

3.3.4 Summary

The outputs confirm that:

- RA is correctly configured as a trusted CA (myCA).
- R1 has successfully obtained a signed X.509 certificate from the CA.
- The certificate chain is self-signed at the CA level.
- RSA key pairs are generated locally on each router and are bound to X.509 certificates issued by the CA for IKEv1 authentication using digital signatures.
- Both R1 and R2 possess locally generated RSA key pairs used for authentication and certificate binding in IKEv1.

3.4 SCEP Enrollment Analysis

SCEP (Simple Certificate Enrollment Protocol) is used to automate certificate distribution between routers and the CA using HTTP.

The enrollment process consists of:

- CA certificate request
- CA certificate response
- Router certificate request
- Router certificate issuance

3.4.1 CA Certificate Retrieval

Initially, R1 requests the CA certificate using the SCEP `GetCACert` operation over HTTP.

48 95.195538	00:35:09:73:00:00	00:35:09:73:00:00	LOOP	00 Reply
41 93.199950	200.1.1.1	224.0.0.5	OSPF	94 Hello Packet
42 93.563621	200.1.1.10	224.0.0.5	OSPF	94 Hello Packet
43 95.110005	200.1.1.1	200.1.1.10	TCP	60 19426 → 80 [SYN] Seq=0 Win=4128 Len=0 MSS=1460
44 95.124859	200.1.1.10	200.1.1.1	TCP	60 80 → 19426 [SYN, ACK] Seq=0 Ack=1 Win=4128 Len=0 MSS=1460
45 95.125767	200.1.1.1	200.1.1.10	TCP	60 19426 → 80 [ACK] Seq=1 Ack=1 Win=4128 Len=0
46 95.126857	200.1.1.1	200.1.1.10	HTTP	211 GET /cgi-bin/pkiclient.exe?operation=GetCACert&message=myTrustpoint HTTP/1.0
47 95.134954	200.1.1.10	200.1.1.1	TCP	60 80 → 19426 [ACK] Seq=1 Ack=158 Win=3971 Len=0
48 95.145088	200.1.1.10	200.1.1.1	TCP	310 80 → 19426 [ACK] Seq=1 Ack=158 Win=3971 Len=256 [TCP segment of a reassembled PDU]
49 95.145161	200.1.1.10	200.1.1.1	HTTP	603 HTTP/1.1 200 OK (application/x-x509-ca-cert)
50 95.146222	200.1.1.1	200.1.1.10	TCP	60 19426 → 80 [ACK] Seq=158 Ack=807 Win=7195 Len=0
51 95.147128	200.1.1.1	200.1.1.10	TCP	60 19426 → 80 [FIN, PSH, ACK] Seq=158 Ack=807 Win=7195 Len=0
52 95.148580	200.1.1.1	200.1.1.10	TCP	60 36405 → 80 [SYN] Seq=0 Win=4128 Len=0 MSS=1460
53 95.155158	200.1.1.10	200.1.1.1	TCP	60 80 → 19426 [ACK] Seq=807 Ack=159 Win=3971 Len=0
54 95.155211	200.1.1.10	200.1.1.1	TCP	60 80 → 36405 [SYN, ACK] Seq=0 Ack=1 Win=4128 Len=0 MSS=1460
55 95.156565	200.1.1.1	200.1.1.10	TCP	60 36405 → 80 [ACK] Seq=1 Ack=1 Win=4128 Len=0
56 95.157423	200.1.1.1	200.1.1.10	HTTP	211 GET /cgi-bin/pkiclient.exe?operation=GetCACaps&message=myTrustpoint HTTP/1.0
57 95.165271	200.1.1.10	200.1.1.1	TCP	60 80 → 36405 [ACK] Seq=1 Ack=158 Win=3971 Len=0
58 95.165334	200.1.1.10	200.1.1.1	TCP	310 80 → 36405 [ACK] Seq=1 Ack=158 Win=3971 Len=256 [TCP segment of a reassembled PDU]
59 95.165348	200.1.1.10	200.1.1.1	HTTP	112 HTTP/1.1 200 OK (application/x-pki-message)
60 95.166484	200.1.1.1	200.1.1.10	TCP	60 36405 → 80 [ACK] Seq=158 Ack=316 Win=7686 Len=0
61 95.167437	200.1.1.1	200.1.1.10	TCP	60 36405 → 80 [FIN, PSH, ACK] Seq=158 Ack=316 Win=7686 Len=0
62 95.175347	200.1.1.10	200.1.1.1	TCP	60 80 → 36405 [ACK] Seq=316 Ack=159 Win=3971 Len=0
63 95.185420	ca:01:16:60:00:00	ca:01:16:60:00:00	LOOP	60 Reply
- Hypertext Transfer Protocol				
+ HTTP/1.1 200 OK\r\n				
Date: Fri, 15 May 2026 16:29:14 GMT\r\n				
Server: cisco-IOS\r\n				
Content-Type: application/x-x509-ca-cert\r\n				
Expires: Fri, 15 May 2026 16:29:14 GMT\r\n				
Last-Modified: Fri, 15 May 2026 16:29:14 GMT\r\n				
Cache-Control: no-store, no-cache, must-revalidate\r\n				
Pragma: no-cache\r\n				
Accept-Ranges: none\r\n				
\r\n				
[HTTP response 1/1]				
[Time since request: 0.018304000 seconds]				
[Request in frame: 46]				
[Request URI: http://200.1.1.10/cgi-bin/pkiclient.exe?operation=GetCACert&message=myTrustpoint]				
File Data: 511 bytes				
- Media Type				
Media type: application/x-x509-ca-cert (511 bytes)				

Figure 1: SCEP GetCACert request and CA certificate response

The CA replies with an HTTP 200 OK message containing an X.509 CA certificate with media type `application/x-x509-ca-cert`. This certificate allows R1 to establish trust with the Certification Authority before certificate enrollment.

3.4.2 Certificate Enrollment Request

After establishing trust with the CA, R1 performs certificate enrollment using the SCEP `PKIOperation` request.

169 330.534670	200.1.1.10	224.0.0.5	OSPF	94 Hello Packet
170 333.552158	ca:01:16:60:00:00	CDP/VTP/OT/PagP/UD...	CDP	349 Device ID: RA Port ID: FastEthernet0/0
171 335.184788	ca:01:16:60:00:00	ca:01:16:60:00:00	LOOP	60 Reply
172 335.756961	200.1.1.1	224.0.0.5	OSPF	94 Hello Packet
173 336.711505	200.1.1.1	200.1.1.10	TCP	60 55472 → 80 [SYN] Seq=0 Win=4128 Len=0 MSS=1460
174 336.730711	200.1.1.10	200.1.1.1	TCP	60 80 → 55472 [SYN, ACK] Seq=0 Ack=1 Win=4128 Len=0 MSS=1460
175 336.731861	200.1.1.1	200.1.1.10	TCP	60 55472 → 80 [ACK] Seq=1 Ack=1 Win=4128 Len=0
176 336.732806	200.1.1.1	200.1.1.10	TCP	1514 55472 → 80 [ACK] Seq=1 Ack=1 Win=4128 Len=1460 [TCP segment of a reassembled PDU]
177 336.740658	200.1.1.10	200.1.1.1	TCP	60 80 → 55472 [ACK] Seq=1 Ack=1461 Win=2668 Len=0
178 336.740715	200.1.1.10	200.1.1.1	TCP	60 [TCP Window Update] 80 → 55472 [ACK] Seq=1 Ack=1461 Win=4128 Len=0
179 336.743055	200.1.1.1	200.1.1.10	HTTP	907 GET /cgi-bin/pkiclient.exe?operation=PKIOperation&message=MIIF7QYJKoZIhvcNAQcCoIIF3jCCBdoCAQExCzAJBgUrdgMCGgUAMIICvgyJKoZI%0Ahvcl
180 336.759752	200.1.1.10	200.1.1.1	TCP	310 80 → 55472 [ACK] Seq=1 Ack=2314 Win=3275 Len=256 [TCP segment of a reassembled PDU]
181 336.901694	200.1.1.10	200.1.1.1	TCP	1259 80 → 55472 [ACK] Seq=257 Ack=2314 Win=3275 Len=1295 [TCP segment of a reassembled PDU]
182 336.904198	200.1.1.1	200.1.1.10	TCP	60 55472 → 80 [ACK] Seq=2314 Ack=1462 Win=6539 Len=0
183 336.904245	200.1.1.1	200.1.1.10	TCP	60 [TCP Window Update] 55472 → 80 [ACK] Seq=2314 Ack=1462 Win=8000 Len=0
184 336.911797	200.1.1.10	200.1.1.1	TCP	166 80 → 55472 [ACK] Seq=1462 Ack=2314 Win=3275 Len=112 [TCP segment of a reassembled PDU]
185 336.911885	200.1.1.10	200.1.1.1	HTTP	71 HTTP/1.1 200 OK (application/x-pki-message)
186 336.916086	200.1.1.1	200.1.1.10	TCP	60 55472 → 80 [ACK] Seq=2314 Ack=1592 Win=7871 Len=0
187 336.916127	200.1.1.1	200.1.1.10	TCP	60 55472 → 80 [FIN, PSH, ACK] Seq=2314 Ack=1592 Win=7871 Len=0
188 336.921879	200.1.1.10	200.1.1.1	TCP	60 80 → 55472 [ACK] Seq=1592 Ack=2315 Win=3275 Len=0
189 339.758848	200.1.1.10	224.0.0.5	OSPF	94 Hello Packet
190 340.502206	0c:35:d9:73:00:00	0c:35:d9:73:00:00	LOOP	60 Reply
191 344.963580	200.1.1.1	224.0.0.5	OSPF	94 Hello Packet
192 345.184696	ca:01:16:60:00:00	ca:01:16:60:00:00	LOOP	60 Reply
Response Phrase: OK				
Date: Fri, 15 May 2026 16:33:16 GMT\r\n				
Server: cisco-IOS\r\n				
Content-Type: application/x-pki-message\r\n				
Expires: Fri, 15 May 2026 16:33:16 GMT\r\n				
Last-Modified: Fri, 15 May 2026 16:33:16 GMT\r\n				
Cache-Control: no-store, no-cache, must-revalidate\r\n				
Pragma: no-cache\r\n				
Accept-Ranges: none\r\n				
\r\n				
[HTTP response 1/1]				
[Time since request: 0.168830000 seconds]				
[Request in frame: 179]				
[Request URI [truncated]: http://200.1.1.10/cgi-bin/pkiclient.exe?operation=PKIOperation&message=MIIF7QYJKoZIhvcNAQcCoIIF3jCCBdoCAQExCzAJBgUrdgMCGgUAMIICvgyJKoZI%0Ahvcl				
File Data: 1297 bytes				
- Media Type				
Media type: application/x-pki-message (1297 bytes)				

Figure 2: SCEP PKIOperation certificate enrollment request

The HTTP request contains a PKCS#10 certificate signing request (CSR) encoded in the message field. The CSR includes the router identity and its RSA public key, allowing the CA to generate a signed X.509 certificate for R1.

The captured HTTP messages show certificate exchange between R1 and the CA. The content-type field indicates certificate payload transfer (.crt).

Using Wireshark, the packet containing the issued certificate was identified by filtering HTTP traffic and locating the response message with a **Media Type** indicating a certificate object. The packet was then selected, and the certificate data was extracted by right-clicking on the relevant field and choosing *Export Packet Bytes*. The file was saved with a .crt extension, which allows it to be decoded as an X.509 certificate.

packet.crt	
saarCA	
Identity:	saarCA
Verified by:	saarCA
Expires:	14/05/2029
Details	
Subject Name	
CN (Common Name):	saarCA
Issuer Name	
CN (Common Name):	saarCA
Issued Certificate	
Version:	3
Serial Number:	01
Not Valid Before:	2026-05-15
Not Valid After:	2029-05-14
Certificate Fingerprints	
SHA1:	0B 6B F4 7E F0 93 2F C1 54 A3 3F A8 4C 1F 48 D1 80 08 39 58
MD5:	46 CB 9C 10 CC 37 03 11 8C FC B5 45 E4 DD 2F 58
Public Key Info	
Key Algorithm:	RSA
Key Parameters:	05 00
Key Size:	1024
Key SHA1 Fingerprint:	BD 39 CD 1B 6D A4 0C CF 6A 75 25 4D A0 C5 53 AE 85 8D 41 C9
Public Key:	30 81 89 02 81 81 00 A3 6A 1F EA 2A 1C B5 81 9D E4 BF CA 59 FD D2 76 17 CF 05 D2 AD 94 AD 74 EA BC 27 C2 45 7C 45 6D 2F C0 5E D9 DC B2 30 B8 51 67 9A 20 38 40 55 A2 9C D0 F8 9C 75 46 D2 0A 07 70 82 66 58 58 3D 5E 2E 18 FE FB 94 81 ED 2F A0 95 67 EB A4 97 AA 82 BC 13 CD C3 5B 9E 22 F9 DC ED 01 75 92 5A EB 61 25 E1 2A 38 33 83 A3 47 76 59 8F 0F 02 03 01 00 01
Basic Constraints	
Certificate Authority:	Yes
Max Path Length:	Unlimited
Critical:	Yes
Key Usage	
Usages:	Digital signature $\rightarrow$ Certificate signature $\rightarrow$ Revocation list signature
Critical:	Yes
Extension	
Identifier:	2.5.29.35
Value:	30 16 80 14 42 BD 53 91 0D 07 D9 57 6C C2 66 30 AA BA 09 E4 A9 31 62 E2
Critical:	No
Subject Key Identifier	
Key Identifier:	42 BD 53 91 0D 07 D9 57 6C C2 66 30 AA BA 09 E4 A9 31 62 E2
Critical:	No
Signature	

Figure 3: HTTP packet carrying the issued X.509 certificate (.crt file export in Wireshark)

The exported certificate represents the CA-signed identity certificate for R1. It contains the subject information, the public key corresponding to R1, and the digital signature generated by the CA, which validates its authenticity within the PKI infrastructure.

3.5 Encrypted ICMP Traffic Analysis

After configuring IPSec with RSA-signature authentication, connectivity between PC1 and PC2 was successfully verified using ICMP echo requests (ping).

Traffic was captured on the public network between R1 and R2 while the ping operation was performed.

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	0c:35:d9:73:00:00	0c:35:d9:73:00:00	LOOP	60	Reply
2	3.889135	200.1.1.10	224.0.0.5	OSPF	94	Hello Packet
3	5.482695	ca:01:16:60:00:00	ca:01:16:60:00:00	LOOP	60	Reply
4	6.320045	2.2.2.2	1.1.1.1	ESP	166	ESP (SPI=0xb87d2aab)
5	7.009428	1.1.1.1	2.2.2.2	ESP	166	ESP (SPI=0x147d646a)
6	7.269011	200.1.1.1	224.0.0.5	OSPF	94	Hello Packet
7	8.171183	2.2.2.2	1.1.1.1	ESP	182	ESP (SPI=0xb87d2aab)
8	8.188890	1.1.1.1	2.2.2.2	ESP	182	ESP (SPI=0x147d646a)
9	8.221515	2.2.2.2	1.1.1.1	ESP	182	ESP (SPI=0xb87d2aab)
10	8.239182	1.1.1.1	2.2.2.2	ESP	182	ESP (SPI=0x147d646a)
11	8.282182	2.2.2.2	1.1.1.1	ESP	182	ESP (SPI=0xb87d2aab)
12	8.299668	1.1.1.1	2.2.2.2	ESP	182	ESP (SPI=0x147d646a)
13	8.322552	2.2.2.2	1.1.1.1	ESP	182	ESP (SPI=0xb87d2aab)
14	8.339979	1.1.1.1	2.2.2.2	ESP	182	ESP (SPI=0x147d646a)
15	8.362850	2.2.2.2	1.1.1.1	ESP	182	ESP (SPI=0xb87d2aab)
16	8.380385	1.1.1.1	2.2.2.2	ESP	182	ESP (SPI=0x147d646a)
17	10.028466	0c:35:d9:73:00:00	0c:35:d9:73:00:00	LOOP	60	Reply
18	13.658516	200.1.1.10	224.0.0.5	OSPF	94	Hello Packet
19	15.485532	ca:01:16:60:00:00	ca:01:16:60:00:00	LOOP	60	Reply
20	15.847636	2.2.2.2	1.1.1.1	ESP	166	ESP (SPI=0xb87d2aab)
21	16.864505	200.1.1.1	224.0.0.5	OSPF	94	Hello Packet
22	17.007888	1.1.1.1	2.2.2.2	ESP	166	ESP (SPI=0x147d646a)
23	20.042916	0c:35:d9:73:00:00	0c:35:d9:73:00:00	LOOP	60	Reply


```

▶ Frame 7: 182 bytes on wire (1456 bits), 182 bytes captured (1456 bits) on interface -, id 0
▶ Ethernet II, Src: ca:01:16:60:00:00 (ca:01:16:60:00:00), Dst: 0c:35:d9:73:00:00 (0c:35:d9:73:00:00)
▼ Internet Protocol Version 4, Src: 2.2.2.2, Dst: 1.1.1.1
  0100 .... = Version: 4
  .... 0101 = Header Length: 20 bytes (5)
  ▶ Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
    Total Length: 168
    Identification: 0x011d (285)
  ▶ Flags: 0x00
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 254
    Protocol: Encap Security Payload (50)
    Header Checksum: 0xb501 [validation disabled]
    [Header checksum status: Unverified]
    Source Address: 2.2.2.2
    Destination Address: 1.1.1.1
  ▼ Encapsulating Security Payload
    ESP SPI: 0xb87d2aab (3095210667)
    ESP Sequence: 61

```

Figure 4: Encrypted IPSec traffic observed between R1 and R2

The Wireshark capture shows that the ICMP packets exchanged between PC1 and PC2 are not visible in plaintext on the public network. Instead, the packets appear encapsulated using ESP (Encapsulating Security Payload).

The ESP packets contain encrypted payload data, preventing direct inspection of the original ICMP echo request and echo reply contents. Only the external IP header remains visible, showing communication between the tunnel endpoints (R1 and R2).

This confirms that IPSec is correctly providing:

- **Confidentiality** through payload encryption
- **Integrity protection** through ESP authentication
- **Secure tunnel encapsulation** between the two sites

The observed ESP traffic corresponds to the IPSec transform-set configuration:

```
crypto ipsec transform-set myTSet esp-aes esp-sha-hmac
```

AES is used for encryption while SHA-HMAC is used for integrity verification.

3.6 ISAKMP and SA Re-establishment Analysis

To analyze tunnel re-establishment, the IPSec Security Associations (SAs) were manually cleared using:

```
clear crypto session
```

While capturing traffic on the public network, new ISAKMP exchanges were observed as the routers negotiated fresh IPSec Security Associations.

1 0.000000	1.1.1.1	2.2.2.2	ESP	166 ESP (SPI=0x37bfac13)
2 1.087267	2.2.2.2	1.1.1.1	ESP	166 ESP (SPI=0x3aa0a0ef)
3 1.968939	200.1.1.10	224.0.0.5	OSPF	94 Hello Packet
4 4.571026	200.1.1.1	224.0.0.5	OSPF	94 Hello Packet
5 5.111299	0c:35:d9:73:00:00	0c:35:d9:73:00:00	LOOP	60 Reply
6 5.470172	ca:01:16:60:00:00	ca:01:16:60:00:00	LOOP	60 Reply
7 7.109808	ca:01:16:60:00:00	CDP/VTP/DTP/PagP/UD...	CDP	349 Device ID: RA Port ID: FastEthernet0/0
8 8.201714	1.1.1.1	2.2.2.2	ISAKMP	118 Informational
9 8.203333	1.1.1.1	2.2.2.2	ISAKMP	134 Informational
10 8.217971	2.2.2.2	1.1.1.1	ISAKMP	134 Informational
11 8.888812	1.1.1.1	2.2.2.2	ISAKMP	210 Identity Protection (Main Mode)
12 8.901438	2.2.2.2	1.1.1.1	ISAKMP	150 Identity Protection (Main Mode)
13 8.907525	1.1.1.1	2.2.2.2	ISAKMP	414 Identity Protection (Main Mode)
14 8.931954	2.2.2.2	1.1.1.1	ISAKMP	434 Identity Protection (Main Mode)
15 8.968150	1.1.1.1	2.2.2.2	ISAKMP	742 Identity Protection (Main Mode)
16 9.012585	2.2.2.2	1.1.1.1	ISAKMP	742 Identity Protection (Main Mode)
17 9.031615	1.1.1.1	2.2.2.2	ISAKMP	230 Quick Mode
18 9.054747	2.2.2.2	1.1.1.1	ISAKMP	230 Quick Mode
19 9.072084	1.1.1.1	2.2.2.2	ISAKMP	102 Quick Mode
20 9.073561	1.1.1.1	2.2.2.2	ESP	150 ESP (SPI=0x59df71ad)
21 9.084887	2.2.2.2	1.1.1.1	ESP	150 ESP (SPI=0x08155835)
22 9.087434	1.1.1.1	2.2.2.2	ESP	166 ESP (SPI=0x59df71ad)
23 9.105426	2.2.2.2	1.1.1.1	ESP	150 ESP (SPI=0x08155835)
24 9.105619	2.2.2.2	1.1.1.1	ESP	166 ESP (SPI=0x08155835)
25 9.109976	1.1.1.1	2.2.2.2	ESP	150 ESP (SPI=0x59df71ad)
26 9.110573	1.1.1.1	2.2.2.2	ESP	262 ESP (SPI=0x59df71ad)
27 9.125696	2.2.2.2	1.1.1.1	ESP	182 ESP (SPI=0x08155835)
28 9.127906	1.1.1.1	2.2.2.2	ESP	134 ESP (SPI=0x59df71ad)
29 9.128484	1.1.1.1	2.2.2.2	ESP	150 ESP (SPI=0x59df71ad)
30 9.145928	2.2.2.2	1.1.1.1	ESP	166 ESP (SPI=0x08155835)
31 9.145991	2.2.2.2	1.1.1.1	ESP	134 ESP (SPI=0x08155835)
32 9.148997	1.1.1.1	2.2.2.2	ESP	166 ESP (SPI=0x59df71ad)
33 11.649739	200.1.1.10	224.0.0.5	OSPF	94 Hello Packet
34 11.661379	1.1.1.1	2.2.2.2	ESP	150 ESP (SPI=0x59df71ad)
35 11.680534	2.2.2.2	1.1.1.1	ESP	150 ESP (SPI=0x08155835)
36 13.733941	1.1.1.1	2.2.2.2	ESP	182 ESP (SPI=0x59df71ad)
37 13.754607	2.2.2.2	1.1.1.1	ESP	182 ESP (SPI=0x08155835)
38 14.254637	200.1.1.1	224.0.0.5	OSPF	94 Hello Packet
39 15.160283	0c:35:d9:73:00:00	0c:35:d9:73:00:00	LOOP	60 Reply
40 15.468087	ca:01:16:60:00:00	ca:01:16:60:00:00	LOOP	60 Reply
41 16.248445	2.2.2.2	1.1.1.1	ESP	150 ESP (SPI=0x08155835)
42 16.264702	1.1.1.1	2.2.2.2	ESP	150 ESP (SPI=0x59df71ad)
43 18.238626	1.1.1.1	2.2.2.2	ESP	166 ESP (SPI=0x59df71ad)
44 18.409561	2.2.2.2	1.1.1.1	ESP	166 ESP (SPI=0x08155835)
45 20.827957	200.1.1.10	224.0.0.5	OSPF	94 Hello Packet

▶ Frame 1: 166 bytes on wire (1328 bits), 166 bytes captured (1328 bits) on interface -, id 0

Figure 5: ISAKMP exchanges after clearing crypto sessions

After the existing SAs were deleted, R1 and R2 initiated a new IKEv1 Phase 1 negotiation using ISAKMP messages over UDP port 500.

The captured exchange shows the following operations:

- ISAKMP SA proposal negotiation
- Exchange of nonces and Diffie-Hellman values
- Certificate exchange between peers

- RSA digital signature authentication
- Establishment of a new ISAKMP Security Association
- Negotiation of IPsec Phase 2 parameters
- Creation of new IPsec SAs for ESP traffic

The certificate-based authentication process relies on the X.509 certificates previously obtained from the CA through SCEP enrollment.

During authentication, each router validates:

- The peer certificate authenticity
- The CA signature
- The RSA signature generated during IKE authentication

Successful validation allows the tunnel to be securely re-established without the use of pre-shared keys.

The re-established IPsec tunnel was confirmed by successful encrypted ICMP communication between PC1 and PC2 after the negotiation process completed.

3.7 Peer Public Key Storage Verification

After successful IKEv1 authentication and IPsec tunnel establishment, each router stores the public key information of the remote peer.

At R1, the public key of R2 can be viewed using:

```
show crypto key pubkey-chain rsa name R2
```

The output confirms that R1 has learned and stored the RSA public key associated with R2's certificate.

```
R1#sh crypto key pubkey-chain rsa name R2
```

```
Key name: R2
```

```
Subject name(X.500 DN name): hostname=R2+serialNumber=9C92ZG7WMXGLWHR7XWAK8
```

```
Key id: 11
```

```
Serial number: 02
```

```
Usage: Signature Key
```

```
Source: Certificate
```

```
Data:
```

```
30819F30 0D06092A 864886F7 0D010101 05000381 8D003081 89028181 00C337FE
B0DAEE4D 444B0AF7 A19A73B3 2D2FCD5E 27E09095 3017E393 2F27F7AA 581894E6
5E7F50B3 0454ACF2 FD1E8E24 F91125DD 6D611D93 611D70AD 36C59F6F EAEE003C
7704B6DB 41D9A165 27252864 17170DA2 F38A68D4 46C91133 36DBCBC5 B09AD90E
0F05531B F7ABB4A5 0B954C0F 389C2195 3DE377FF 7FE63FB3 B02DF189 35020301
0001
```

This public key is extracted from the X.509 certificate presented by R2 during the IKEv1 authentication process.

The stored public key allows R1 to:

- Verify digital signatures generated by R2
- Validate the identity of the remote peer
- Establish trusted IPsec communications

Similarly, R2 stores the public key of R1 after successful authentication.

The existence of the peer public key chain confirms that certificate-based authentication using RSA signatures was successfully completed and that both routers trust certificates issued by the Certification Authority.

3.8 SCEP Messages Observed After Router Restart

After stopping and restarting all routers, Wireshark captures were collected on the public network shortly after boot.

During startup, HTTP messages related to SCEP were again exchanged between the routers and the CA.

No.	Time	Source	Destination	Protocol	Length	Info
87	91.311649	2.2.2.2	1.1.1.1	ISAKMP	210	Identity Protection (Main Mode)
88	91.315619	1.1.1.1	2.2.2.2	ISAKMP	150	Identity Protection (Main Mode)
89	91.332219	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
90	91.350331	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
91	91.382800	2.2.2.2	1.1.1.1	ISAKMP	774	Identity Protection (Main Mode)
92	91.406319	200.1.1.1	200.1.1.10	TCP	60	16204 → 80 [SYN] Seq=0 Win=4128 Len=0 MSS=1460
93	91.444908	200.1.1.10	200.1.1.1	TCP	60	80 → 16204 [SYN, ACK] Seq=0 Ack=1 Win=4128 Len=0 MSS=1460
94	91.445726	200.1.1.1	200.1.1.10	TCP	60	16204 → 80 [ACK] Seq=1 Ack=1 Win=4128 Len=0
95	91.446541	200.1.1.1	200.1.1.10	HTTP	211	GET /cgi-bin/pkiclient.exe?operation=GetCACaps&message=myTrustpoint HTTP/1.0
96	91.454995	200.1.1.10	200.1.1.1	TCP	60	80 → 16204 [ACK] Seq=1 Ack=158 Win=3971 Len=0
97	91.475169	200.1.1.10	200.1.1.1	TCP	310	80 → 16204 [ACK] Seq=1 Ack=158 Win=3971 Len=256 [TCP segment of a reassembled PDU]
98	91.475234	200.1.1.10	200.1.1.1	HTTP	112	HTTP/1.1 200 OK (application/x-pki-message)
99	91.476088	200.1.1.1	200.1.1.10	TCP	60	16204 → 80 [ACK] Seq=158 Ack=316 Win=7686 Len=0
100	91.476837	200.1.1.1	200.1.1.10	TCP	60	16204 → 80 [FIN, PSH, ACK] Seq=158 Ack=316 Win=7686 Len=0
101	91.485277	200.1.1.10	200.1.1.1	TCP	60	80 → 16204 [ACK] Seq=316 Ack=159 Win=3971 Len=0
102	91.587719	200.1.1.1	200.1.1.10	TCP	60	22215 → 80 [SYN] Seq=0 Win=4128 Len=0 MSS=1460
103	91.590602	200.1.1.10	200.1.1.1	TCP	60	80 → 22215 [SYN, ACK] Seq=0 Ack=1 Win=4128 Len=0 MSS=1460
104	91.596765	200.1.1.1	200.1.1.10	TCP	60	22215 → 80 [ACK] Seq=1 Ack=1 Win=4128 Len=0
105	91.597308	200.1.1.1	200.1.1.10	TCP	1514	22215 → 80 [ACK] Seq=1 Ack=1 Win=4128 Len=1460 [TCP segment of a reassembled PDU]
106	91.606136	200.1.1.10	200.1.1.1	TCP	60	80 → 22215 [ACK] Seq=1 Ack=1461 Win=2668 Len=0
107	91.606197	200.1.1.10	200.1.1.1	TCP	60	[TCP Window Update] 80 → 22215 [ACK] Seq=1 Ack=1461 Win=4128 Len=0
108	91.607833	200.1.1.1	200.1.1.10	HTTP	418	GET /cgi-bin/pkiclient.exe?operation=PKIOperation&message=MIIEoQYJKoZIhvcNAQCoIIEkjcCBIA4CAQExCzAJBgUrDgMCGgUAMIIIBIAYJ...
109	91.616244	200.1.1.10	200.1.1.1	TCP	310	80 → 22215 [ACK] Seq=1 Ack=1825 Win=3764 Len=256 [TCP segment of a reassembled PDU]
110	91.652295	1.1.1.1	2.2.2.2	ISAKMP	210	Identity Protection (Main Mode)
111	91.666685	2.2.2.2	1.1.1.1	ISAKMP	150	Identity Protection (Main Mode)
112	91.670489	1.1.1.1	2.2.2.2	ISAKMP	414	Identity Protection (Main Mode)
113	91.697817	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
114	91.729434	200.1.1.10	200.1.1.1	HTTP	3943	HTTP/1.1 200 OK (application/x-pki-message)
115	91.734258	1.1.1.1	2.2.2.2	ISAKMP	742	Identity Protection (Main Mode)
116	91.735353	200.1.1.1	200.1.1.10	TCP	60	22215 → 80 [ACK] Seq=1825 Ack=1247 Win=6755 Len=0
117	91.736353	200.1.1.1	200.1.1.10	TCP	60	22215 → 80 [FIN, PSH, ACK] Seq=1825 Ack=1247 Win=6755 Len=0
118	91.737934	200.1.1.10	200.1.1.1	TCP	60	80 → 22215 [ACK] Seq=1247 Ack=1826 Win=3764 Len=0
119	91.859141	1.1.1.1	2.2.2.2	ISAKMP	742	Identity Protection (Main Mode)
120	92.115710	2.2.2.2	1.1.1.1	ISAKMP	742	Identity Protection (Main Mode)
121	92.131452	1.1.1.1	2.2.2.2	ISAKMP	230	Quick Mode
122	92.146105	2.2.2.2	1.1.1.1	ISAKMP	230	Quick Mode
123	92.158653	1.1.1.1	2.2.2.2	ISAKMP	182	Quick Mode
124	92.159099	1.1.1.1	2.2.2.2	ESP	150	ESP (SPI=0xaa824a3a)
125	92.177822	2.2.2.2	1.1.1.1	ESP	150	ESP (SPI=0xaa824a3a)
126	92.178695	1.1.1.1	2.2.2.2	ESP	166	ESP (SPI=0xaa824a3a)
127	92.198041	2.2.2.2	1.1.1.1	ESP	150	ESP (SPI=0xaa824a3a)
128	92.198103	2.2.2.2	1.1.1.1	ESP	166	ESP (SPI=0xaa824a3a)
129	92.201255	1.1.1.1	2.2.2.2	ESP	150	ESP (SPI=0xaa824a3a)
130	92.201780	1.1.1.1	2.2.2.2	ESP	198	ESP (SPI=0xaa824a3a)
131	92.218377	2.2.2.2	1.1.1.1	ESP	198	ESP (SPI=0xaa824a3a)

Figure 6: SCEP-related HTTP traffic observed after router restart

The captured traffic includes HTTP requests and responses associated with certificate validation and certificate status retrieval operations.

These SCEP exchanges occur because the routers must re-establish trust information after reboot and verify the validity of the installed certificates before using them for IPsec authentication.

The observed messages serve several purposes:

- Verification that the CA is reachable
- Retrieval or validation of CA information
- Validation of certificate status
- Synchronization of trust-related information

This mechanism ensures that routers do not use invalid, expired, or revoked certificates during IKEv1 authentication.

The SCEP communication therefore plays an essential role in maintaining the integrity and trustworthiness of the PKI infrastructure used for IPsec VPN authentication.

3.9 Certificate Revocation and Authentication Failure

The certificates issued to R1 and R2 were revoked at the Certification Authority using:

```
RA#crypto pki server myCA revoke 02
RA#crypto pki server myCA revoke 03
```

After revocation, all routers were restarted and Wireshark captures were collected on the links between the routers and the CA.

When attempting communication between PC1 and PC2, the ping operation failed and the IPsec tunnel could not be established.

3.9.1 SCEP and Certificate Validation Traffic

After reboot, HTTP/SCEP-related messages were observed between the routers and the CA.

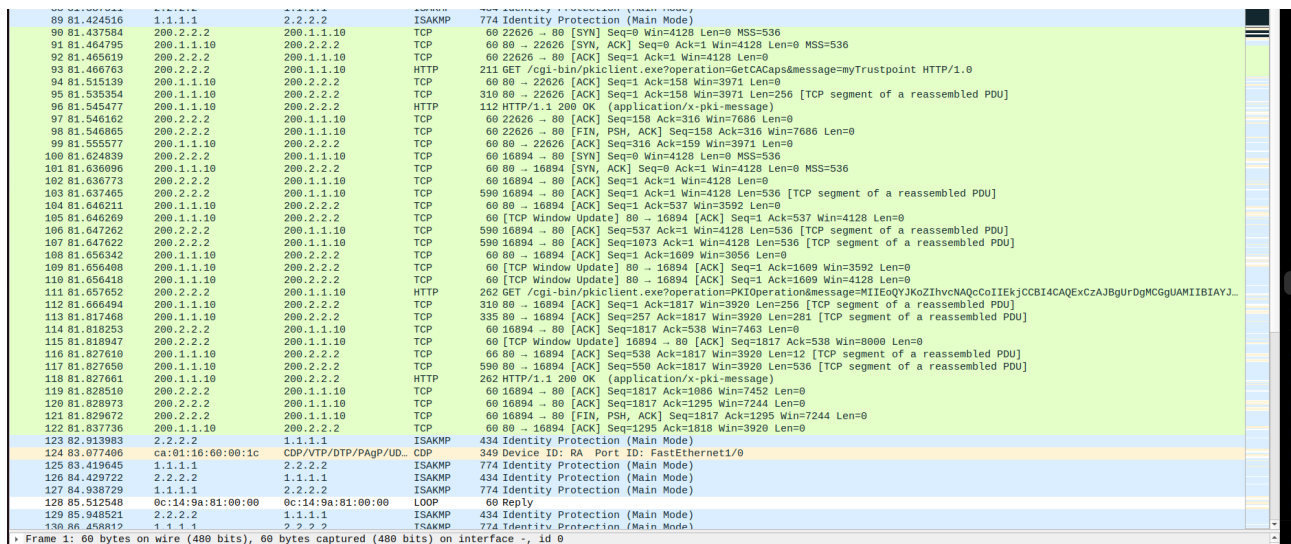


Figure 7: SCEP-related traffic observed after certificate revocation

These messages are associated with certificate validation and trust verification operations performed before IPsec authentication.

The routers contact the CA to verify the validity of certificates and retrieve updated revocation information.

3.9.2 Failed ISAKMP Negotiation

While the routers attempted to establish the IPsec tunnel, repeated ISAKMP exchanges were observed.

No.	Time	Source	Destination	Protocol	Length	Info
143	121.379416	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
144	121.426688	2.2.2.2	1.1.1.1	ISAKMP	742	Identity Protection (Main Mode)
148	121.448431	200.1.1.1	200.1.1.10	HTTP	211	GET /cgi-bin/pkiclient.exe?operation=GetCACaps&message=myTrustpoint HTTP/1.0
151	121.457924	200.1.1.10	200.1.1.1	HTTP	112	HTTP/1.1 200 OK (application/x-pki-message)
161	121.579467	200.1.1.1	200.1.1.10	HTTP	410	GET /cgi-bin/pkiclient.exe?operation=PKIOperation&message=MIIEoQYJKoZIhvcNAQcCoIIekjCCB
163	121.663616	1.1.1.1	2.2.2.2	ISAKMP	210	Identity Protection (Main Mode)
164	121.680646	2.2.2.2	1.1.1.1	ISAKMP	150	Identity Protection (Main Mode)
165	121.684412	1.1.1.1	2.2.2.2	ISAKMP	414	Identity Protection (Main Mode)
166	121.700732	200.1.1.10	200.1.1.1	HTTP	1091	HTTP/1.1 200 OK (application/x-pki-message)
170	121.710938	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
171	121.808940	1.1.1.1	2.2.2.2	ISAKMP	742	Identity Protection (Main Mode)
172	122.822828	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
173	122.839759	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
174	123.333749	2.2.2.2	1.1.1.1	ISAKMP	742	Identity Protection (Main Mode)
175	123.343473	1.1.1.1	2.2.2.2	ISAKMP	742	Identity Protection (Main Mode)
177	124.352601	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
178	124.364442	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
179	124.859609	2.2.2.2	1.1.1.1	ISAKMP	742	Identity Protection (Main Mode)
180	124.870661	1.1.1.1	2.2.2.2	ISAKMP	742	Identity Protection (Main Mode)
182	125.872345	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
183	125.899941	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
184	126.383736	2.2.2.2	1.1.1.1	ISAKMP	742	Identity Protection (Main Mode)
185	126.403320	1.1.1.1	2.2.2.2	ISAKMP	742	Identity Protection (Main Mode)
187	127.400181	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
188	127.422952	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
189	127.908572	2.2.2.2	1.1.1.1	ISAKMP	742	Identity Protection (Main Mode)
190	127.926655	1.1.1.1	2.2.2.2	ISAKMP	742	Identity Protection (Main Mode)
192	128.921906	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
193	128.946909	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
194	129.431559	2.2.2.2	1.1.1.1	ISAKMP	742	Identity Protection (Main Mode)
195	129.452803	1.1.1.1	2.2.2.2	ISAKMP	742	Identity Protection (Main Mode)
196	129.969676	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
197	130.445735	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
198	130.482267	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
203	140.463165	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
204	140.508341	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
210	150.467697	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
211	150.510451	2.2.2.2	1.1.1.1	ISAKMP	434	Identity Protection (Main Mode)
212	151.425759	2.2.2.2	1.1.1.1	ISAKMP	210	Identity Protection (Main Mode)
213	151.428092	1.1.1.1	2.2.2.2	ISAKMP	150	Identity Protection (Main Mode)
214	151.445928	2.2.2.2	1.1.1.1	ISAKMP	414	Identity Protection (Main Mode)
215	151.458714	1.1.1.1	2.2.2.2	ISAKMP	434	Identity Protection (Main Mode)
216	151.496294	2.2.2.2	1.1.1.1	ISAKMP	742	Identity Protection (Main Mode)
217	151.729487	1.1.1.1	2.2.2.2	ISAKMP	210	Identity Protection (Main Mode)
218	151.747897	2.2.2.2	1.1.1.1	ISAKMP	150	Identity Protection (Main Mode)

Figure 8: Repeated ISAKMP negotiation attempts after certificate revocation

The repeated ISAKMP packets indicate that the routers continuously attempt to establish an IKEv1 Security Association but fail during the authentication phase.

This behavior was confirmed using IOS verification commands.

```
R1#sh crypto isakmp sa
IPv4 Crypto ISAKMP SA
dst src state conn-id status
1.1.1.1 2.2.2.2 MM_KEY_EXCH 1040 ACTIVE
1.1.1.1 2.2.2.2 MM_KEY_EXCH 1038 ACTIVE
1.1.1.1 2.2.2.2 MM_NO_STATE 1036 ACTIVE (deleted)
1.1.1.1 2.2.2.2 MM_NO_STATE 1034 ACTIVE (deleted)
2.2.2.2 1.1.1.1 MM_KEY_EXCH 1041 ACTIVE
2.2.2.2 1.1.1.1 MM_NO_STATE 1039 ACTIVE (deleted)
2.2.2.2 1.1.1.1 MM_NO_STATE 1037 ACTIVE (deleted)
```

```
IPv6 Crypto ISAKMP SA
```

The ISAKMP state remains in `MM_KEY_EXCH`, indicating that Main Mode negotiation does not complete successfully.

A successfully established tunnel would normally reach the `QM_IDLE` state.

3.9.3 Absence of IPsec Security Associations

The IPsec SA database confirms that no operational IPsec tunnel was created.

```
R1#sh crypto ipsec sa
```

```
interface: Tunnel0
  Crypto map tag: Tunnel0-head-0, local addr 1.1.1.1

  protected vrf: (none)
  local ident (addr/mask/prot/port): (0.0.0.0/0.0.0.0/0/0)
  remote ident (addr/mask/prot/port): (0.0.0.0/0.0.0.0/0/0)
  current_peer 2.2.2.2 port 500
    PERMIT, flags={origin_is_acl,} #pkts encaps: 0,
    #pkts encrypt: 0, #pkts digest: 0 #pkts decaps: 0,
    #pkts decrypt: 0, #pkts verify: 0 #pkts compressed: 0,
    #pkts decompressed: 0 #pkts not compressed: 0,
    #pkts compr. failed: 0 #pkts not decompressed: 0,
    #pkts decompress failed: 0
    #send errors 0, #recv errors 0

  local crypto endpt.: 1.1.1.1, remote crypto endpt.: 2.2.2.2
  plaintext mtu 1500, path mtu 1500, ip mtu 1500, ip mtu idb
GigabitEthernet0/0
  current outbound spi: 0x0(0)
  PFS (Y/N): N, DH group: none

  inbound esp sas:

  inbound ah sas:

  inbound pcp sas:

  outbound esp sas:

  outbound ah sas:

  outbound pcp sas:
```

```
R1#
```

The counters remain at zero because IPsec encryption was never activated. Additionally, no ESP Security Associations were present:

inbound esp sas:
outbound esp sas:

This confirms that Phase 2 IPSec negotiation could not be completed.

3.9.4 Explanation of Communication Failure

Communication fails because the certificates used by R1 and R2 were revoked by the Certification Authority.

After reboot, the routers verify certificate validity during IKEv1 authentication. The CA indicates that the peer certificates are no longer trusted because they are listed in the Certificate Revocation List (CRL).

As a result:

- RSA signature authentication fails
- IKEv1 Main Mode negotiation cannot complete
- ISAKMP Security Associations are not successfully established
- IPSec Security Associations are never created
- ESP encrypted traffic cannot be generated
- ICMP communication between PC1 and PC2 fails

The experiment demonstrates the importance of certificate revocation in PKI-based IPSec infrastructures, ensuring that compromised or invalid certificates cannot be used to establish trusted VPN connections.