


# 34S Series — Metal Oxide Varistors

34 mm square, epoxy-encapsulated high-energy MOVs for surge protective devices · Datasheet · Rev. 2026-10-21

## Description

The 34S series is the flagship line of 34 × 34 mm square, epoxy-encapsulated zinc oxide varistors made by Guiyang High-Tech Yige Electronic Co., Ltd. for surge protective device (SPD) manufacturers and OEMs. The varistor discs are pressed, sintered, metallized, coated and tested in our own Guiyang plant — not bought in — which is how tolerances and surge ratings stay consistent from batch to batch. In North America, the series is supported by Flyboat Electronic LLC, the factory's sales and engineering center in Bellevue, WA.



## Features

- Centre melt-through under power-frequency overload: the melt-through (puncture) point is engineered to occur at the centre of the disc, underneath the copper electrode, so heat is absorbed and conducted straight to the disconnection point — the chip resists melt-through longer and a mating thermal disconnector trips faster.
- For top-grade 34S the melt-through point is confined within a 0.5 cm radius of the chip centre, converting a random failure location into a controlled one.
- If the chip does melt through, the flame jet is shielded by the copper electrode, which conducts the heat to the trip point and drives the thermal disconnector open.
- Exceptional damp-heat resistance: under a customer's severe boil test (30 min in boiling water, cool, measure, re-boil; 6 cycles required with no significant change in varistor voltage or leakage), Yige product has reached 8 cycles with small-current parameters essentially unchanged.
- High energy headroom: In 20 kA (25 kA for H variants), Imax up to 60 kA, 2 ms energy absorption up to 1,980 J.
- Long, verifiable service life (Arrhenius law): verified minimum expected life of 110 years at 40 °C, 11 years at 65 °C, 0.7 years at 95 °C upper ambient temperature (115 °C / 1,000 h ageing basis).
- High TOV withstand: at a temporary overvoltage of 1.45 × Uc the chip stays thermally stable for more than 45 min (r.m.s.), with no damage.

## Agency approvals

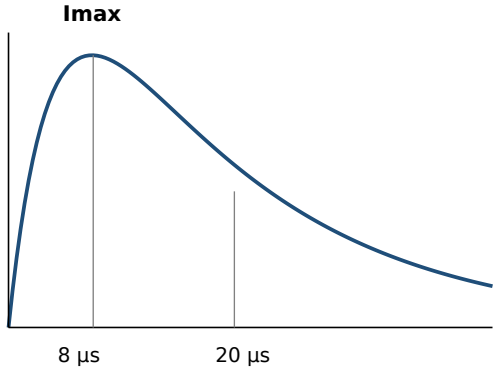
| Standard | Category | File / status |
|---|---|---|
| UL 1449 | VZCA2 (US) — surge protective components | File E335803, UL Recognized Component |
| CSA C22.2 No. 269.5-17 | VZCA8 (Canada) | File E335803, UL Recognized Component |

31 model grades are recognized, covering varistor voltages from 82 V to 1,800 V (model codes 820–182). Verify in UL Product iQ (productiq.ulprospector.com) by searching file number E335803 — the record lists exactly which model codes are covered. The UL Recognized Component Mark (mirrored “RU”) is etched on each recognized part together with the model code; a component carrying the circular UL Listing mark instead is a red flag worth verifying.

## Absolute maximum ratings

| Parameter | Range / limit | Unit |
|---|---|---|
| Continuous operating voltage, AC (VM(AC)rms) | 60 to 1000 | V |
| Continuous operating voltage, DC (VM(DC)) | 85 to 1465 | V |
| Nominal discharge current In (8/20 µs) | 20 (H variants 25) | kA |
| Maximum discharge current Imax (8/20 µs), standard range | up to 60 | kA |
| Maximum energy absorption (2 ms) | up to 1,980 (single chip); up to 3,720 (multi-chip parallel, Section 4) | J |
| Operating temperature | −40 to +85 (no derating required) | °C |

**Impulse current waveform 8/20 µs (definition)**




CAUTION: stresses above the ratings in the tables below may cause permanent damage. The ranges above summarize the per-model ratings in Sections 1–4; always design to the row for the exact model code.

## Model naming and standard marking

Model naming: 34S K 431 — 34 = nominal size (mm), S = square; K = varistor-voltage tolerance ±10 % (J = ±5 %); 431 = varistor-voltage code (first two digits significant, last digit = number of zeros; 431 = 430 V). Further suffixes give the lead/structure form; -U = uncoated bare electrode disc (no mark = epoxy-coated by default). /D = two-chip parallel, /T = three-chip parallel.

Standard marking (laser-etched on the encapsulated face, three lines): line 1 — the Flyboat lightning trademark with ®; line 2 — the model code, e.g. “34SK511” (34S series, ±10 % tolerance, 510 V varistor voltage); line 3 — the UL Recognized Component Mark followed by the production code, e.g. “26J209”.

## 1. Electrical characteristics — standard ratings

U1mA = varistor voltage at DC 1 mA; ΔU1mA = tolerance; UAC / UDC = maximum continuous operating voltage; In = nominal discharge current (8/20 µs); Imax = maximum discharge current (8/20 µs); UP = clamping voltage at In (reference value–ratio); ETM = maximum energy absorption (2 ms).

| Model | U1mA (V) | ΔU1mA (%) | UAC (V) | UDC (V) | In (kA) | Imax (kA) | UP (V) | ETM (J) | UL | C-UL | TÜV |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 34SK101 | 100 | ±10 | 60 | 85 | 20 | 40 | 360-3.6 | 190 | ✓ | ✓ | ✓ |
| 34SK121 | 120 | ±10 | 75 | 100 | 20 | 40 | 400-3.6 | 230 | ✓ | ✓ | ✓ |
| 34SK151 | 150 | ±10 | 95 | 125 | 20 | 40 | 450-3.0 | 290 | ✓ | ✓ | ✓ |
| 34SK181 | 180 | ±10 | 115 | 150 | 20 | 40 | 490-2.8 | 340 | ✓ | ✓ | ✓ |
| 34SK201 | 200 | ±10 | 130 | 170 | 20 | 40 | 520-2.6 | 390 | ✓ | ✓ | ✓ |
| 34SK221 | 220 | ±10 | 140 | 180 | 20 | 40 | 550-2.6 | 440 | ✓ | ✓ | ✓ |

| Model | U1mA (V) | ΔU1mA (%) | UAC (V) | UDC (V) | In (kA) | Imax (kA) | UP (V) | ETM (J) | UL | C-UL | TÜV |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 34SK241 | 240 | ±10 | 150 | 200 | 20 | 40 | 600-2.6 | 460 | ✓ | ✓ | ✓ |
| 34SK271 | 270 | ±10 | 175 | 225 | 20 | 40 | 680-2.6 | 530 | ✓ | ✓ | ✓ |
| 34SK301 | 300 | ±10 | 195 | 250 | 20 | 40 | 770-2.6 | 600 | ✓ | ✓ | ✓ |
| 34SK331 | 330 | ±10 | 210 | 270 | 20 | 40 | 830-2.55 | 650 | ✓ | ✓ | ✓ |
| 34SK361 | 360 | ±10 | 230 | 300 | 20 | 40 | 910-2.55 | 730 | ✓ | ✓ | ✓ |
| 34SK391 | 390 | ±10 | 250 | 320 | 20 | 40 | 1000-2.55 | 800 | ✓ | ✓ | ✓ |
| 34SK431 | 430 | ±10 | 275 | 350 | 20 | 50 | 1050-2.45 | 910 | ✓ | ✓ | ✓ |
| 34SK471 | 470 | ±10 | 300 | 385 | 20 | 50 | 1100-2.4 | 980 | ✓ | ✓ | ✓ |
| 34SK511 | 510 | ±10 | 320 | 410 | 20 | 50 | 1150-2.35 | 1050 | ✓ | ✓ | ✓ |
| 34SK561 | 560 | ±10 | 350 | 450 | 20 | 50 | 1250-2.35 | 1140 | ✓ | ✓ | ✓ |
| 34SK621 | 620 | ±10 | 385 | 505 | 20 | 50 | 1450-2.3 | 1240 | ✓ | ✓ | ✓ |
| 34SK621H | 620 | ±10 | 385 | 505 | 25 | 60 | 1600-2.5 | 1280 | — | — | — |
| 34SK681 | 680 | ±10 | 420 | 560 | 20 | 50 | 1650-2.3 | 1250 | ✓ | ✓ | ✓ |
| 34SK681H | 680 | ±10 | 420 | 560 | 25 | 60 | 1700-2.5 | 1280 | — | — | — |
| 34SK711 | 710 | ±10 | 440 | 585 | 20 | 40 | 1750-2.3 | 1260 | ✓ | ✓ | ✓ |
| 34SK751 | 750 | ±10 | 460 | 615 | 20 | 40 | 1800-2.3 | 1270 | ✓ | ✓ | ✓ |
| 34SK781 | 780 | ±10 | 485 | 640 | 20 | 40 | 1750-2.3 | 1280 | ✓ | ✓ | ✓ |
| 34SK821 | 820 | ±10 | 510 | 670 | 20 | 40 | 1800-2.3 | 1350 | ✓ | ✓ | ✓ |
| 34SK911 | 910 | ±10 | 550 | 745 | 20 | 40 | 2100-2.3 | 1460 | ✓ | ✓ | ✓ |
| 34SK951 | 950 | ±10 | 575 | 765 | 20 | 40 | 2200-2.3 | 1470 | ✓ | ✓ | ✓ |
| 34SK102 | 1000 | ±10 | 625 | 825 | 20 | 40 | 2400-2.3 | 1530 | ✓ | ✓ | ✓ |
| 34SK112 | 1100 | ±10 | 680 | 895 | 20 | 40 | 2700-2.3 | 1680 | ✓ | ✓ | ✓ |
| 34SK122 | 1200 | ±10 | 750 | 980 | 20 | 40 | 3000-2.3 | 1750 | ✓ | ✓ | ✓ |
| 34SK142 | 1400 | ±10 | 820 | 1120 | 20 | 40 | 3200-2.3 | 1780 | ✓ | — | — |
| 34SK152 | 1500 | ±10 | 850 | 1240 | 20 | 40 | 3400-2.3 | 1880 | ✓ | — | — |
| 34SK162 | 1600 | ±10 | 910 | 1320 | 20 | 40 | 3600-2.3 | 1920 | ✓ | — | — |
| 34SK182 | 1800 | ±10 | 1000 | 1465 | 20 | 40 | 4000-2.3 | 1980 | ✓ | — | — |

## 2. Electrical characteristics — low-residual-voltage ratings

| Model | U1mA (V) | ΔU1mA (%) | UAC (V) | UDC (V) | In (kA) | Imax (kA) | UP (V) | ETM (J) | UL | C-UL | TÜV |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 34SK431 | 430 | ±10 | 275 | 350 | 20 | 40 | 950-2.2 | 910 | ✓ | ✓ | ✓ |
| 34SK471 | 470 | ±10 | 300 | 385 | 20 | 40 | 1030-2.2 | 980 | ✓ | ✓ | ✓ |
| 34SK511 | 510 | ±10 | 320 | 410 | 20 | 40 | 1130-2.2 | 1050 | ✓ | ✓ | ✓ |
| 34SK561 | 560 | ±10 | 350 | 450 | 20 | 40 | 1240-2.2 | 1140 | ✓ | ✓ | ✓ |
| 34SK621 | 620 | ±10 | 385 | 505 | 20 | 40 | 1350-2.15 | 1240 | ✓ | ✓ | ✓ |
| 34SK681 | 680 | ±10 | 420 | 560 | 20 | 40 | 1480-2.15 | 1250 | ✓ | ✓ | ✓ |
| 34SK711 | 710 | ±10 | 440 | 585 | 20 | 40 | 1540-2.15 | 1260 | ✓ | ✓ | ✓ |
| 34SK751 | 750 | ±10 | 460 | 615 | 20 | 40 | 1630-2.15 | 1270 | ✓ | ✓ | ✓ |
| 34SK781 | 780 | ±10 | 485 | 640 | 20 | 40 | 1670-2.15 | 1280 | ✓ | ✓ | ✓ |
| 34SK821 | 820 | ±10 | 510 | 670 | 20 | 40 | 1850-2.1 | 1350 | ✓ | ✓ | ✓ |
| 34SK911 | 910 | ±10 | 550 | 745 | 20 | 40 | 1940-2.1 | 1460 | ✓ | ✓ | ✓ |
| 34SK951 | 950 | ±10 | 575 | 765 | 20 | 40 | 2040-2.1 | 1470 | ✓ | ✓ | ✓ |
| 34SK102 | 1000 | ±10 | 625 | 825 | 20 | 40 | 2200-2.1 | 1530 | ✓ | ✓ | ✓ |
| 34SK112 | 1100 | ±10 | 680 | 895 | 20 | 40 | 2380-2.1 | 1680 | ✓ | ✓ | ✓ |
| 34SK122 | 1200 | ±10 | 750 | 980 | 20 | 40 | 2620-2.1 | 1750 | ✓ | ✓ | ✓ |

## 3. Electrical characteristics — high-energy ratings (10/350 µs)

| Model | U1mA (V) | UAC (V) | UDC (V) | In (kA) | Iimp (kA) | UP (V) | ETM (J) |
|---|---|---|---|---|---|---|---|
| 34SK101 | 100 | 60 | 85 | 20 | 8 | 360-3.6 | 190 |
| 34SK121 | 120 | 75 | 100 | 20 | 8 | 400-3.6 | 230 |
| 34SK181 | 180 | 115 | 150 | 20 | 6 | 450-3.0 | 340 |
| 34SK201 | 200 | 130 | 170 | 20 | 6 | 490-2.8 | 390 |
| 34SK241 | 240 | 150 | 200 | 20 | 6 | 520-2.6 | 460 |
| 34SK271 | 270 | 175 | 225 | 20 | 6 | 550-2.6 | 530 |
| 34SK301 | 300 | 195 | 250 | 20 | 6 | 600-2.6 | 600 |
| 34SK331 | 330 | 210 | 270 | 20 | 6 | 680-2.6 | 650 |
| 34SK361 | 360 | 230 | 300 | 20 | 6 | 770-2.6 | 730 |
| 34SK391 | 390 | 250 | 320 | 20 | 6 | 830-2.55 | 800 |
| 34SK431 | 430 | 275 | 350 | 20 | 6 | 910-2.55 | 910 |
| 34SK471 | 470 | 300 | 385 | 20 | 6 | 1000-2.55 | 980 |
| 34SK511 | 510 | 320 | 410 | 20 | 6 | 1050-2.45 | 1050 |

| Model | U1mA (V) | UAC (V) | UDC (V) | In (kA) | Iimp (kA) | UP (V) | ETM (J) |
|---|---|---|---|---|---|---|---|
| 34SK561 | 560 | 350 | 450 | 20 | 6 | 1100-2.4 | 1140 |
| 34SK621 | 620 | 385 | 505 | 20 | 6 | 1150-2.35 | 1240 |
| 34SK681 | 680 | 420 | 560 | 20 | 6 | 1250-2.35 | 1250 |
| 34SK711 | 710 | 440 | 585 | 20 | 6 | 1450-2.3 | 1260 |

## 4. Electrical characteristics — multi-chip parallel ratings

| Model | U1mA (V) | ΔU1mA (%) | UAC (V) | UDC (V) | In (kA) | Imax (kA) | UP (V) | ETM (J) |
|---|---|---|---|---|---|---|---|---|
| 34SK431D | 430 | ±10 | 275 | 350 | 30 | 65 | 1050-2.45 | 1460 |
| 34SK471D | 470 | ±10 | 300 | 385 | 30 | 65 | 1150-2.45 | 1570 |
| 34SK511D | 510 | ±10 | 320 | 410 | 30 | 65 | 1250-2.45 | 1680 |
| 34SK561D | 560 | ±10 | 350 | 450 | 30 | 65 | 1350-2.4 | 1820 |
| 34SK621D | 620 | ±10 | 385 | 505 | 30 | 65 | 1500-2.4 | 1980 |
| 34SK681D | 680 | ±10 | 420 | 560 | 30 | 65 | 1650-2.4 | 2000 |
| 34SK711D | 710 | ±10 | 440 | 585 | 30 | 65 | 1720-2.4 | 2010 |
| 34SK751D | 750 | ±10 | 460 | 615 | 30 | 65 | 1820-2.4 | 2030 |
| 34SK781D | 780 | ±10 | 485 | 640 | 30 | 65 | 1900-2.4 | 2050 |
| 34SK821D | 820 | ±10 | 510 | 670 | 30 | 65 | 1990-2.4 | 2160 |
| 34SK911D | 910 | ±10 | 550 | 745 | 30 | 65 | 2190-2.4 | 2340 |
| 34SK951D | 950 | ±10 | 575 | 765 | 30 | 65 | 2210-2.4 | 2350 |
| 34SK102D | 1000 | ±10 | 625 | 825 | 30 | 65 | 2420-2.4 | 2450 |
| 34SK112D | 1100 | ±10 | 680 | 895 | 30 | 65 | 2660-2.4 | 2690 |
| 34SK122D | 1200 | ±10 | 750 | 1060 | 30 | 65 | 2900-2.4 | 2800 |

| Model | U1mA (V) | ΔU1mA (%) | UAC (V) | UDC (V) | In (kA) | Imax (kA) | UP (V) | ETM (J) |
|---|---|---|---|---|---|---|---|---|
| 34SK431T | 430 | ±10 | 275 | 350 | 50 | 80 | 1130-2.6 | 2270 |
| 34SK471T | 470 | ±10 | 300 | 385 | 50 | 80 | 1230-2.6 | 2450 |
| 34SK511T | 510 | ±10 | 320 | 410 | 50 | 80 | 1340-2.6 | 2620 |
| 34SK561T | 560 | ±10 | 350 | 450 | 50 | 80 | 1470-2.6 | 2850 |
| 34SK621T | 620 | ±10 | 385 | 505 | 50 | 80 | 1630-2.6 | 3100 |
| 34SK681T | 680 | ±10 | 420 | 560 | 50 | 80 | 1780-2.6 | 3120 |
| 34SK711T | 710 | ±10 | 440 | 585 | 50 | 80 | 1860-2.6 | 3150 |
| 34SK751T | 750 | ±10 | 460 | 615 | 50 | 80 | 1970-2.6 | 3170 |

| Model | U1mA (V) | ΔU1mA (%) | UAC (V) | UDC (V) | In (kA) | Imax (kA) | UP (V) | ETM (J) |
|---|---|---|---|---|---|---|---|---|
| 34SK781T | 780 | ±10 | 485 | 640 | 50 | 80 | 2040-2.6 | 3200 |
| 34SK821T | 820 | ±10 | 510 | 670 | 50 | 80 | 2150-2.6 | 3370 |

| Model | U1mA (V) | ΔU1mA (%) | UAC (V) | UDC (V) | In (kA) | Imax (kA) | UP (V) | ETM (J) |
|---|---|---|---|---|---|---|---|---|
| 34SK431D | 430 | ±10 | 275 | 350 | 40 | 80 | 1120-2.6 | 1800 |
| 34SK471D | 470 | ±10 | 300 | 385 | 40 | 80 | 1220-2.6 | 1960 |
| 34SK511D | 510 | ±10 | 320 | 410 | 40 | 80 | 1320-2.58 | 2100 |
| 34SK561D | 560 | ±10 | 350 | 450 | 40 | 80 | 1450-2.58 | 2280 |
| 34SK621D | 620 | ±10 | 385 | 505 | 40 | 80 | 1600-2.58 | 2480 |
| 34SK681D | 680 | ±10 | 420 | 560 | 40 | 80 | 1750-2.58 | 2500 |
| 34SK711D | 710 | ±10 | 440 | 585 | 40 | 80 | 1830-2.58 | 2520 |
| 34SK751D | 750 | ±10 | 460 | 615 | 40 | 80 | 1940-2.58 | 2540 |
| 34SK781D | 780 | ±10 | 485 | 640 | 40 | 80 | 2010-2.58 | 2560 |
| 34SK821D | 820 | ±10 | 510 | 670 | 40 | 80 | 2120-2.58 | 2700 |
| 34SK911D | 910 | ±10 | 550 | 745 | 40 | 80 | 2350-2.58 | 2920 |
| 34SK951D | 950 | ±10 | 575 | 765 | 40 | 80 | 2450-2.58 | 2940 |
| 34SK102D | 1000 | ±10 | 625 | 825 | 40 | 80 | 2580-2.58 | 3100 |
| 34SK112D | 1100 | ±10 | 680 | 895 | 40 | 80 | 2840-2.58 | 3300 |
| 34SK122D | 1200 | ±10 | 750 | 1060 | 40 | 80 | 3100-2.58 | 3500 |

| Model | U1mA (V) | ΔU1mA (%) | UAC (V) | UDC (V) | In (kA) | Imax (kA) | UP (V) | ETM (J) |
|---|---|---|---|---|---|---|---|---|
| 34SK431T | 430 | ±10 | 275 | 350 | 60 | 100 | 1150-2.7 | 2700 |
| 34SK621T | 620 | ±10 | 385 | 505 | 60 | 100 | 1550-2.5 | 3720 |
| 34SK681T | 680 | ±10 | 420 | 560 | 60 | 100 | 1700-2.5 | 3720 |

## 5. Dimensions and thickness

Bare electrode disc (–U): square chip, face 33 ± 0.5 mm. Bare-disc leaded forms: 34SKaaaDEN-U, 34SKaaaOBO-U, 34SKaaaZP-U, 34SKaaaFG-U (aaa = voltage-code digits). Encapsulated (epoxy-coated) forms: TH, CQ, WK, G1, WEL, KL, LD, LD2, LWB, M, YL, PR; multi-chip encapsulated: HL/D, LD/D, LD2/D, LWB/D, M/D, KL/D, WK/D, YL/D, TH/T, ZK/T. Single-chip encapsulated body ≈ 35–36 mm square (verify individual dimensions against the outline drawings before tooling).

Disc thickness Tmax (mm), bare disc, standard & low-clamping ranges — 101: 2.7 · 121: 2.7 · 151: 2.7 · 181: 2.8 · 201: 2.9 · 221: 3 · 241: 3.1 · 271: 3.3 · 301: 3.5 · 331: 3.6 · 361: 3.8 · 391: 4 · 431: 4.1 · 471: 4.4 · 511: 4.6 · 561: 4.9 · 621: 5.2 · 681: 5.2 · 711: 5.7 · 751: 6 · 781: 6.2 · 821: 6.4 · 911: 7 · 951: 7 · 102: 7 · 112: 7.6 · 122: 7.6

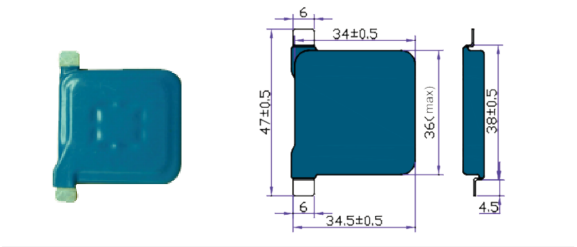
Disc thickness Tmax (mm), bare disc, high-energy (10/350) range — 101: 2.7 · 121: 2.7 · 151: 2.7 · 181: 3.3 · 201: 3.3 · 221: 4.2 · 241: 4.2 · 271: 4.9 · 301: 4.9 · 331: 5.5 · 361: 6.5 · 391: 6.5 · 431: 6.5 · 471: 8 · 511: 8 · 561: 9 · 621: 9 · 681: 9 · 711: 9

Encapsulated thickness Tmax (mm), standard & low-clamping ranges — 101: 3.8 · 121: 3.8 · 151: 3.8 · 181: 3.9 · 201: 4 · 221: 4.1 · 241: 4.2 · 271: 4.4 · 301: 4.6 · 331: 4.7 · 361: 4.9 · 391: 5.1 · 431: 5.2 · 471: 5.5 · 511: 5.7 · 561: 6 · 621: 6.3 · 681: 6.3 · 711: 6.6 · 751: 7.1 · 781: 7.3 · 821: 7.5 · 911: 8.1 · 951: 8.1 · 102: 8.1 · 112: 8.9 · 122: 8.9 · 142: 9.9 · 152: 10.4 · 162: 10.9 · 182: 11.9

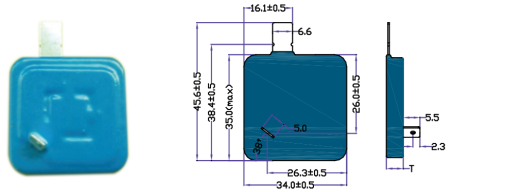
Encapsulated thickness Tmax (mm), high-energy range — 431: 7.5 · 471: 7.5 · 511: 9 · 561: 9 · 621: 10 · 681: 10 · 711: 10

Multi-chip bare-disc thickness Tmax (mm) — /D two-chip — 431: 7.3 · 471: 7.9 · 511: 8.3 · 561: 8.9 · 621: 9.5 · 681: 9.5 · 711: 10.5 · 751: 11.1 · 781: 11.5 · 821: 11.9 · 911: 12.8 · 951: 13.1 · 102: 13.1 · 112: 14.3 · 122: 14.3

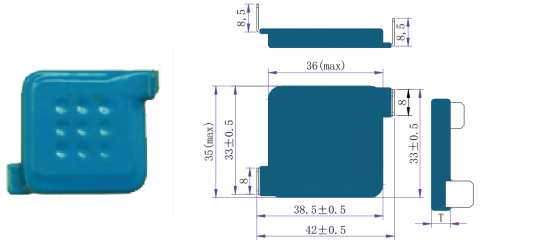
Multi-chip bare-disc thickness Tmax (mm) — /T three-chip — 431: 11.4 · 471: 12 · 511: 12.4 · 561: 13 · 621: 13.6 · 681: 13.6 · 711: 14.6 · 751: 15.1



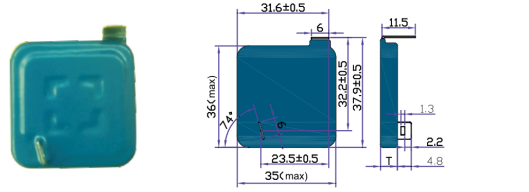

34SKaaaTH



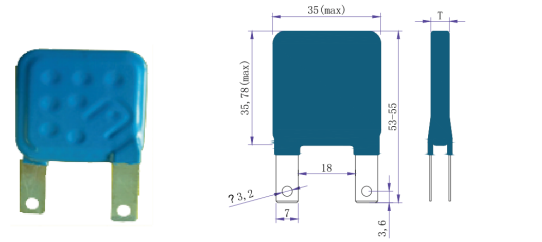

34SKaaaCQ



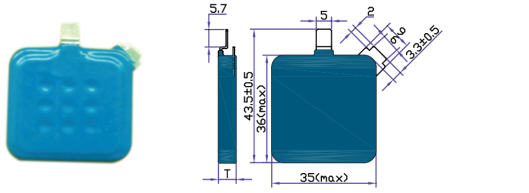

34SKaaaWK



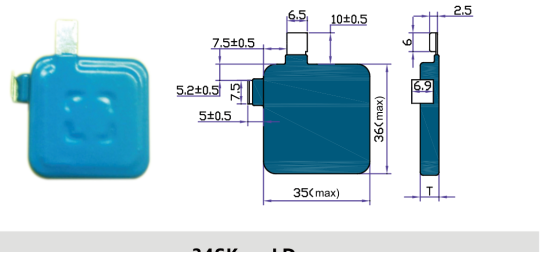

34SKaaaG1

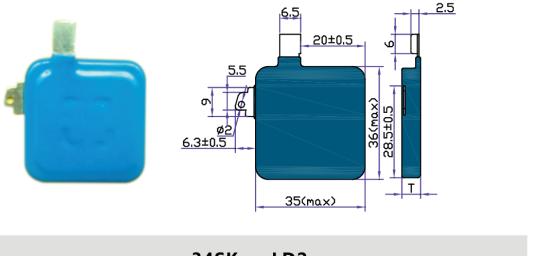



34SKaaaWEL




34SKaaaKL



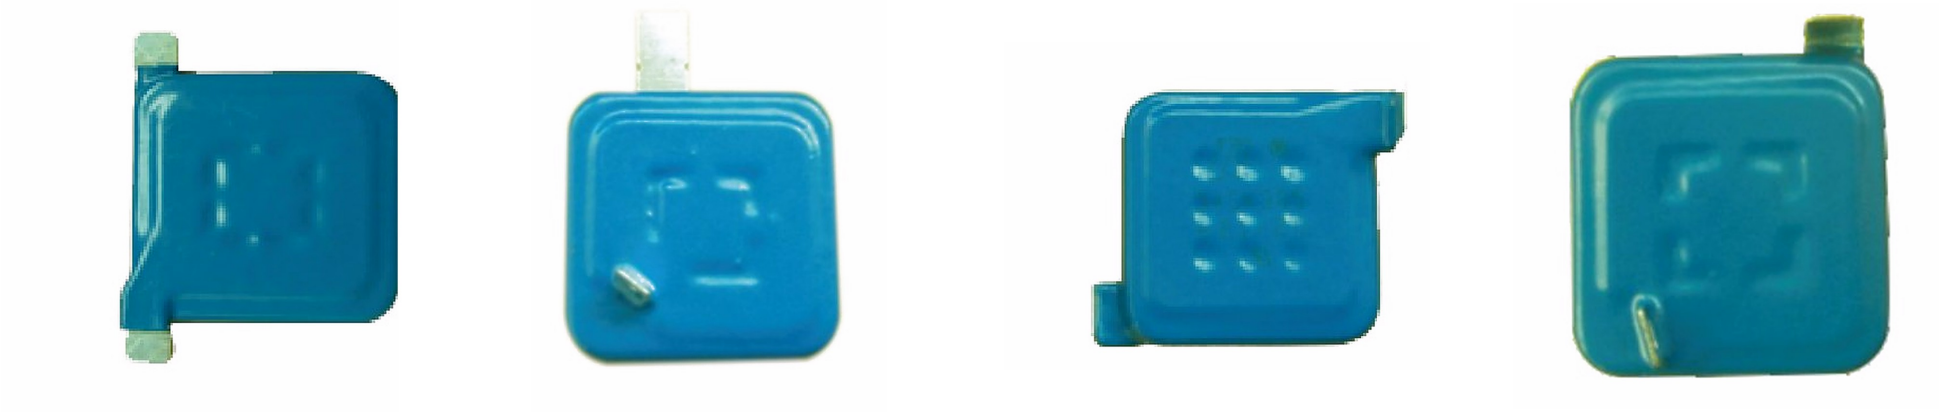

34S encapsulated forms — outline drawings and dimensions (mm), from the company product catalog.

## 6. General specifications

- Operating temperature: −40 °C to +85 °C (no derating required); storage −40 °C to +125 °C (unloaded).
- Leakage current: ≤ 10 µA stable at 75 % of U1mA (DC).
- Ageing: after 1,000 h at 125 °C at 100 % DC load, ΔU1mA within −10 %, leakage ≤ 100 µA, no visible mechanical damage.
- Damp heat: 85 °C / 85 % RH, 2,000 h at UAC — ΔU1mA within −10 %, leakage ≤ 60 µA.
- RoHS: compliant with EU Directive 2011/65/EU. Solderability: lead-out terminals uniformly tinned.
- Marking / packaging: carton packing with packing list, outgoing inspection report and certificate of conformity; custom labels on request.

## 7. Encapsulated package forms

The 34S chip is supplied in a range of epoxy-encapsulated package forms with different terminal and mounting arrangements — eight standard forms are shown below. Outline drawings for each form are given in Section 5 above.



TH CQ WK G1



WEL



KL



LD



LD2

Ordering and support: samples and design-in support — North America: Thomas Dong, Flyboat Electronic LLC, Bellevue, WA (thomasd@flyboatmov.com); China: Colin Fei (colinf@flyboatmov.com). Specifications are subject to change without notice; verify critical ratings against the model row above before design freeze. Certification marks in the ratings tables reproduce the catalog's own checkmark columns; verify coverage against the current UL Product iQ listing for file E335803 before external release.