


Figure 4.5. Raw-to-compressed communication efficiency

(a) Total-payload trade-off



(b) Payload per robot

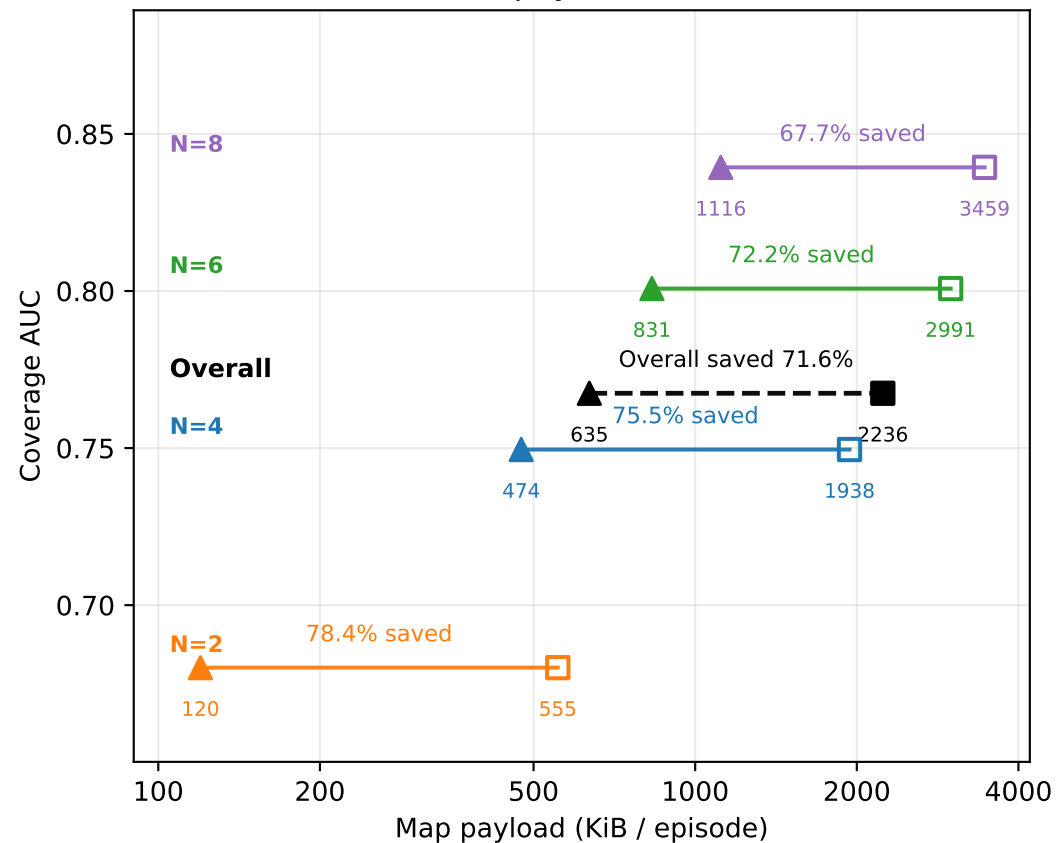