


Figure 4.4. Raw-to-compressed communication efficiency

(a) Total-payload trade-off



(b) Payload per robot

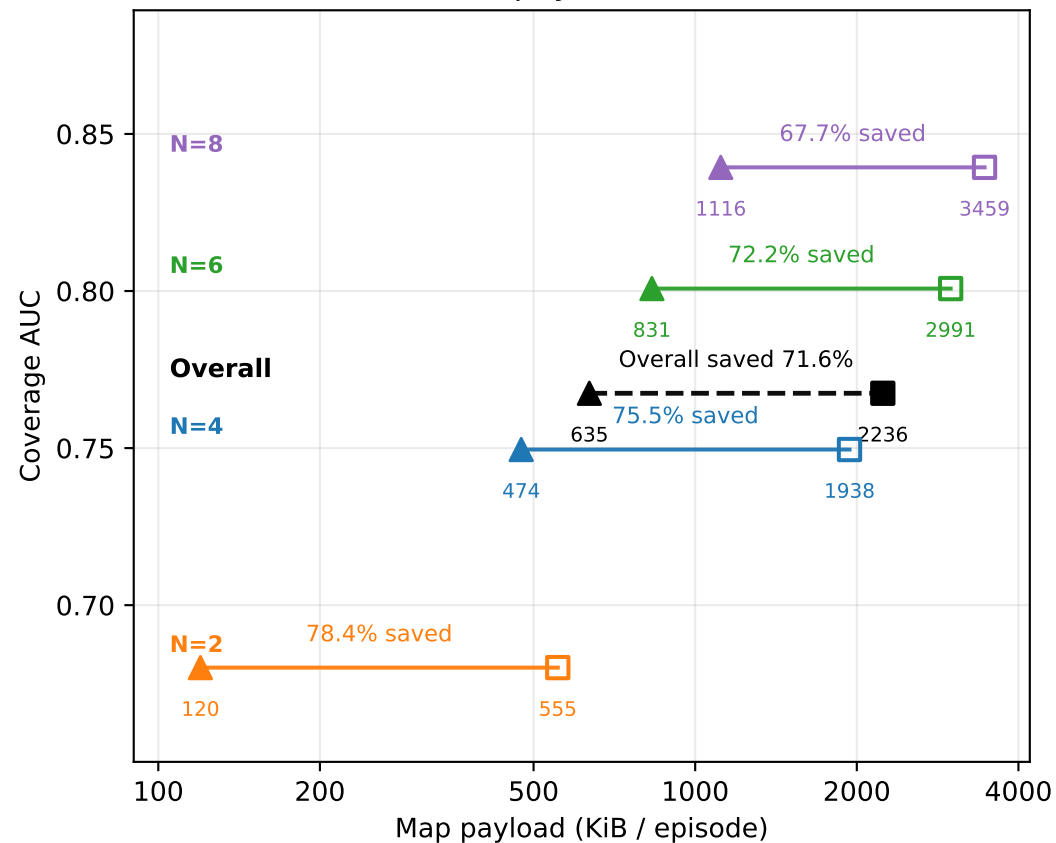