

LAPORAN VOIP




Nama: Rahma santika

Kelas : XI TKJ 2


No. : 30

LANGKAH-LANGKAH CISKO PAKET TRACER


1.buka aplikasi cisco,lalu pilih router (2811)

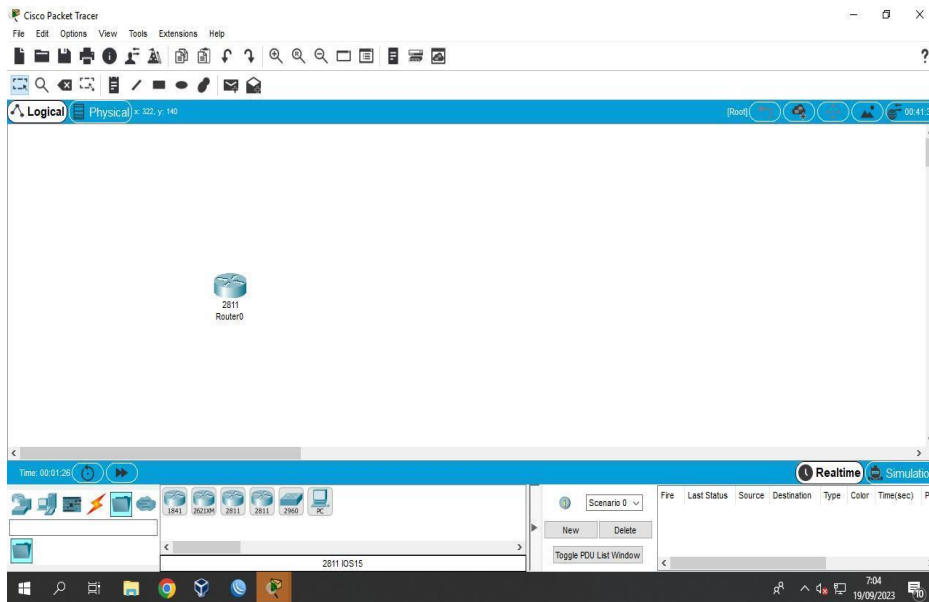


2.pilih switch (2960-24TT)

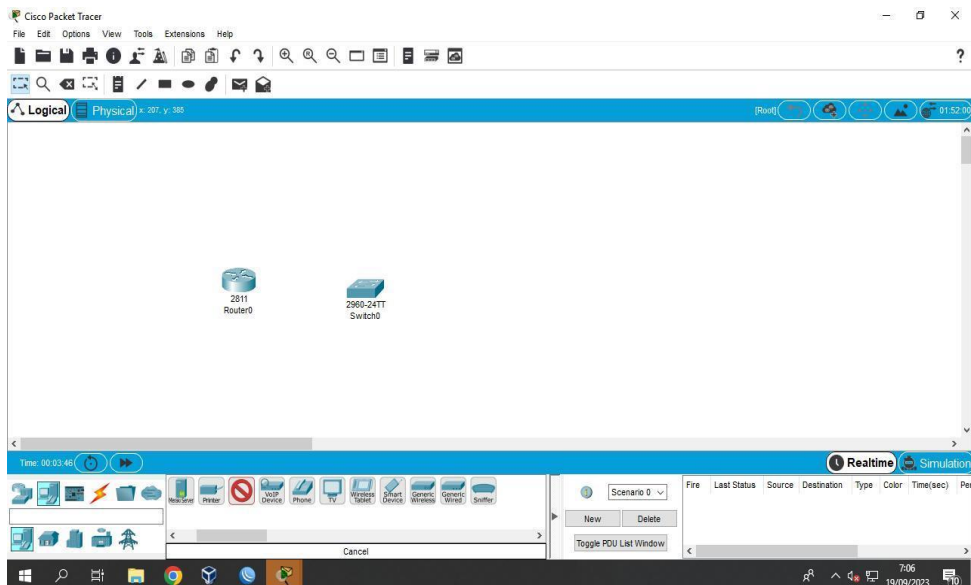

3.kemudian pilih 3 IP phone

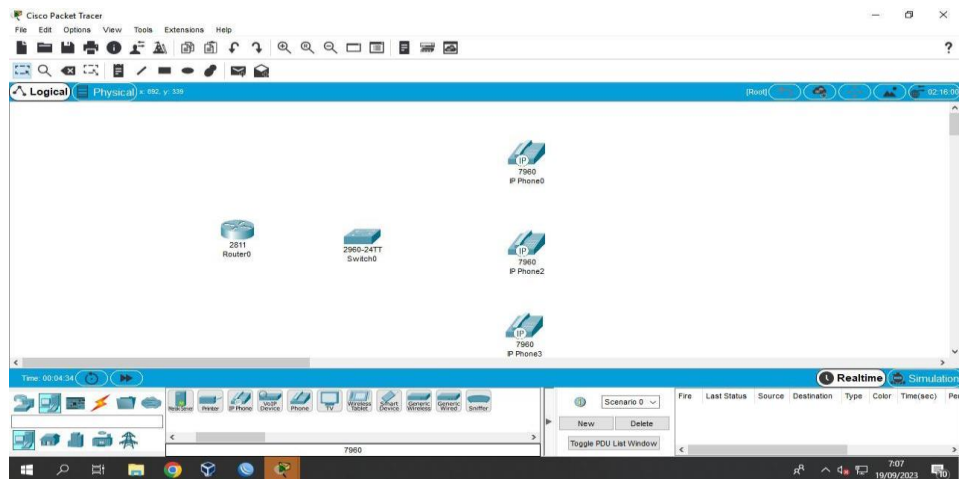


4.pilih kabel straight

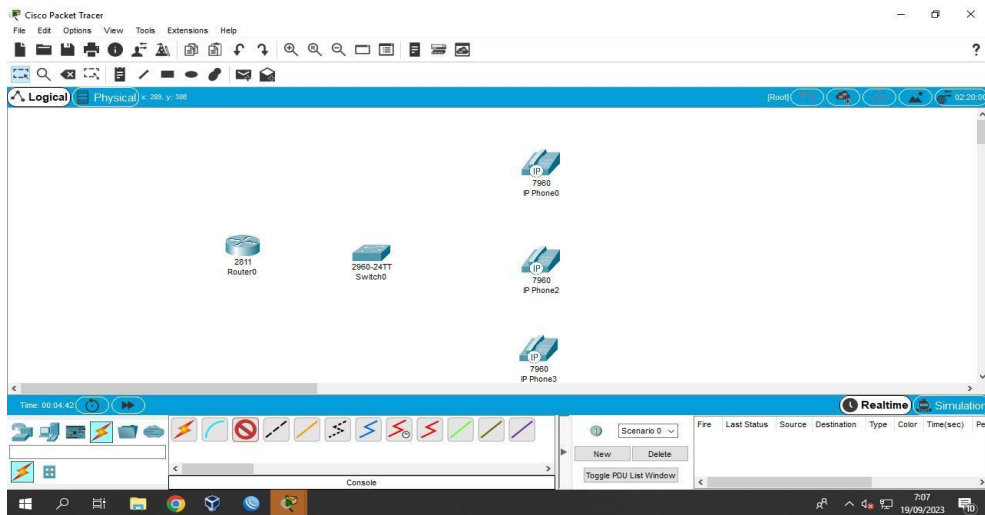


router

5.klik router,pilih fastEthernet 0/0

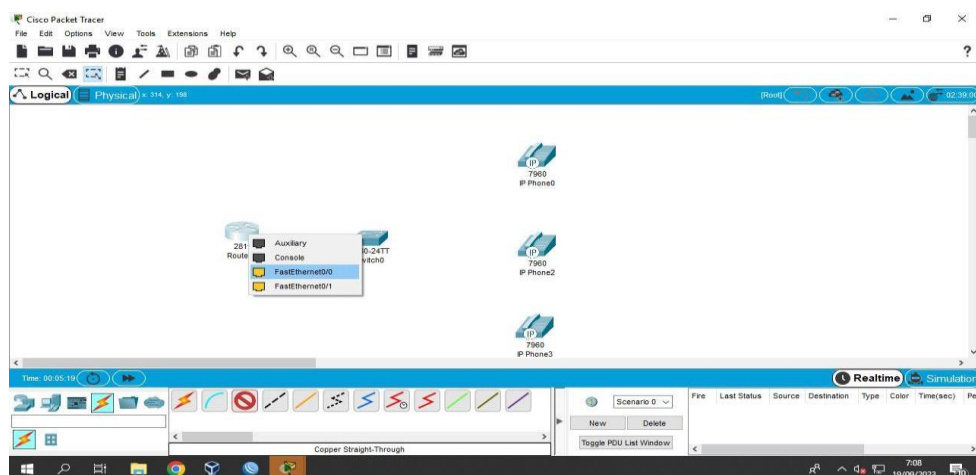


6.klik fastEthernet 0/1

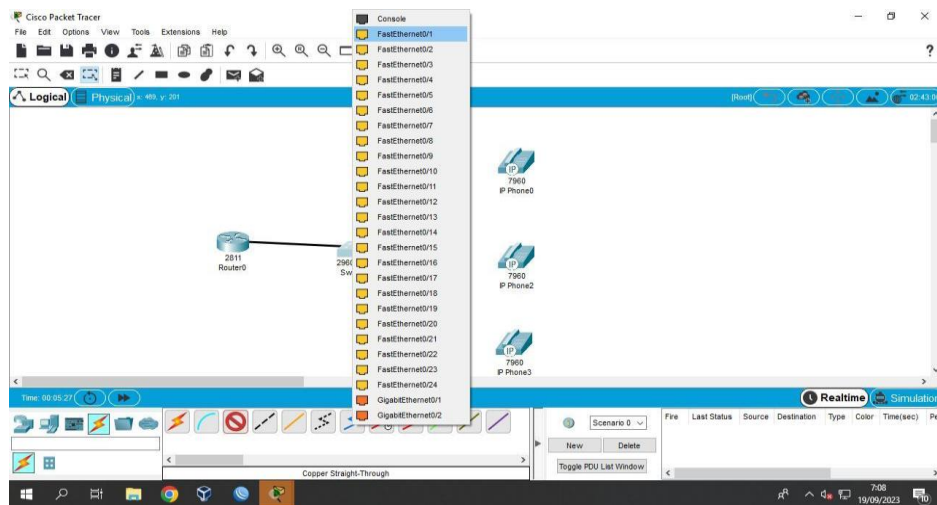


switch


7.pilih kabel straight

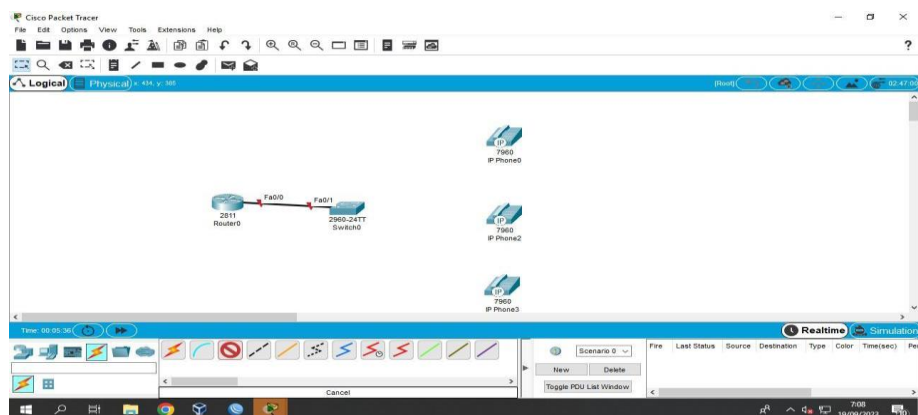





8.klik fastethernet 0/2

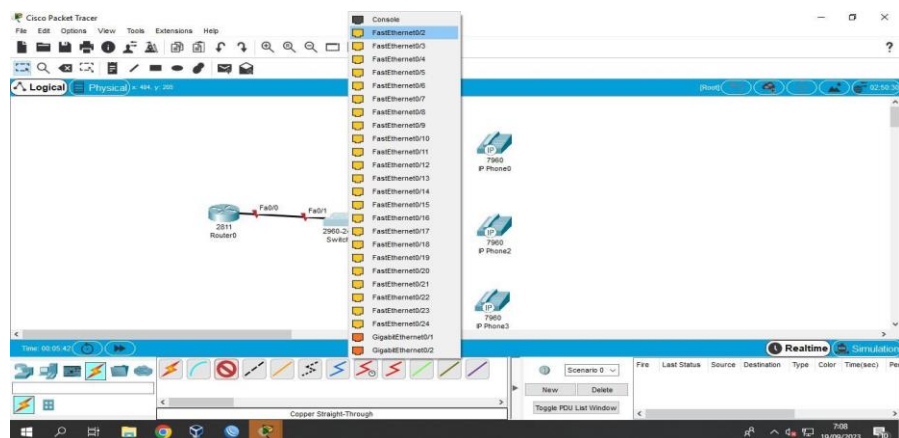




9.pilih switch,klik

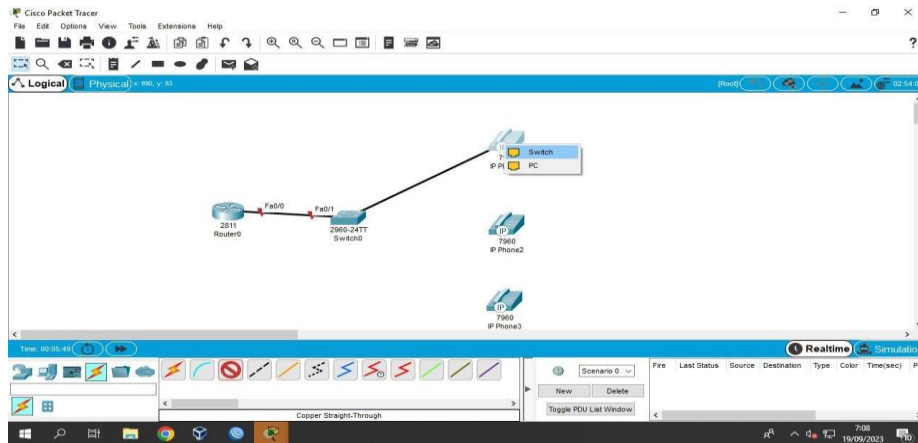

10.ip phone yang ke 2&3 lakukan seperti yang sebelum nya

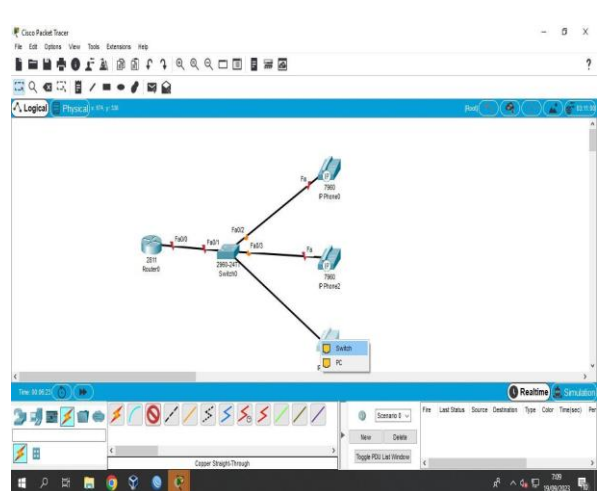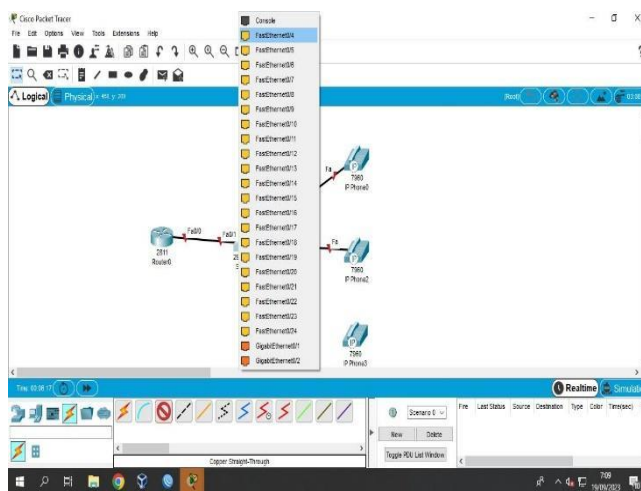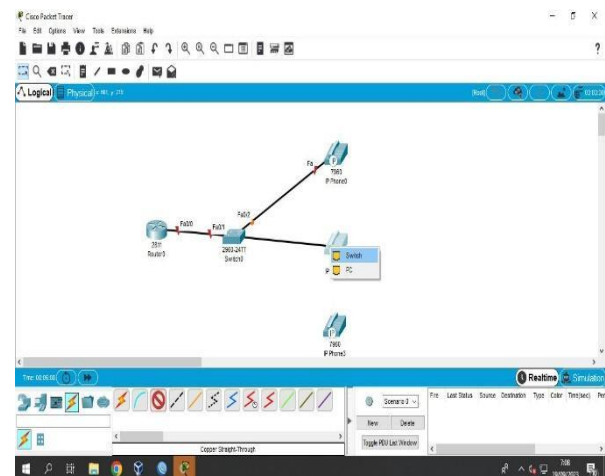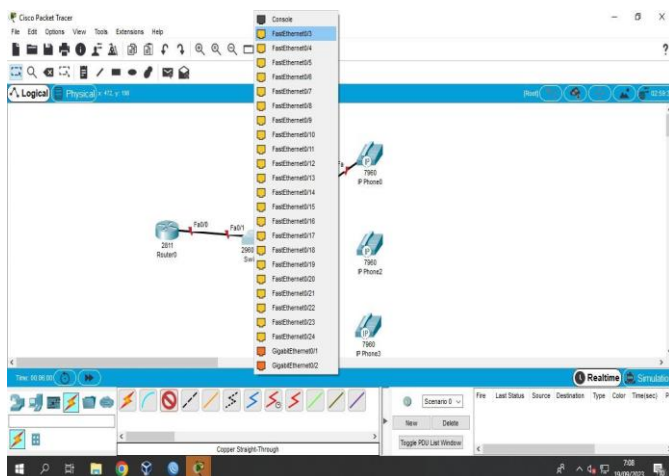


11.lalu drak ketiga IP phone tersebut

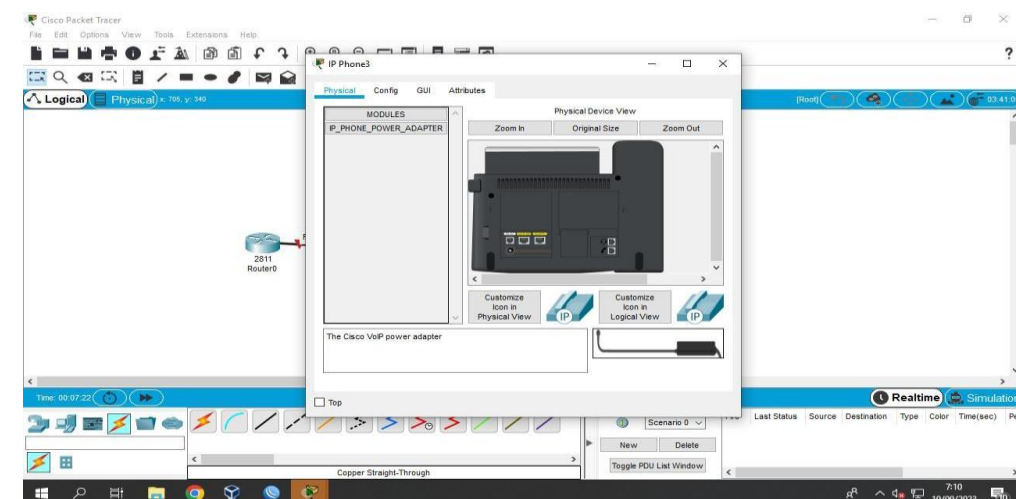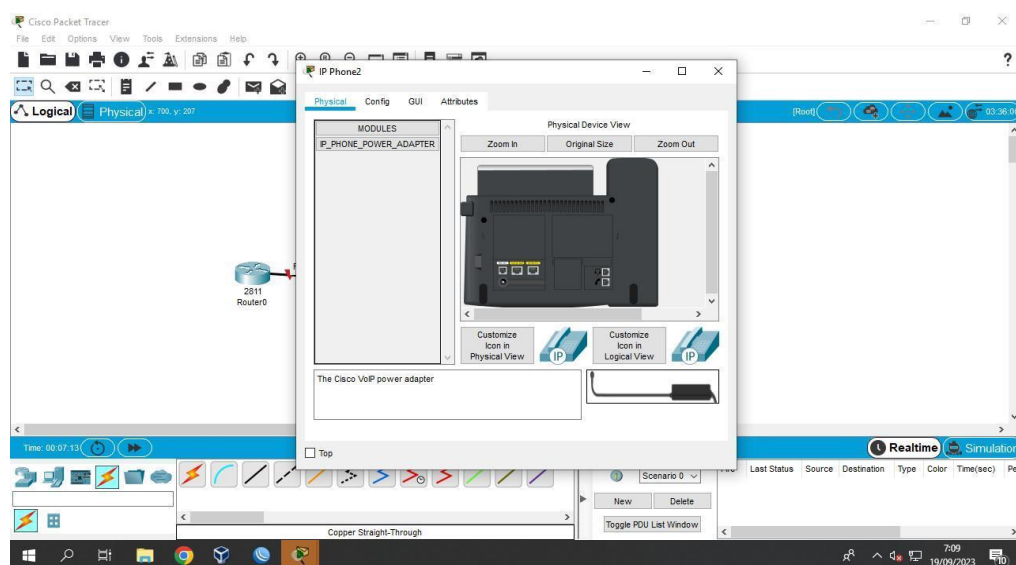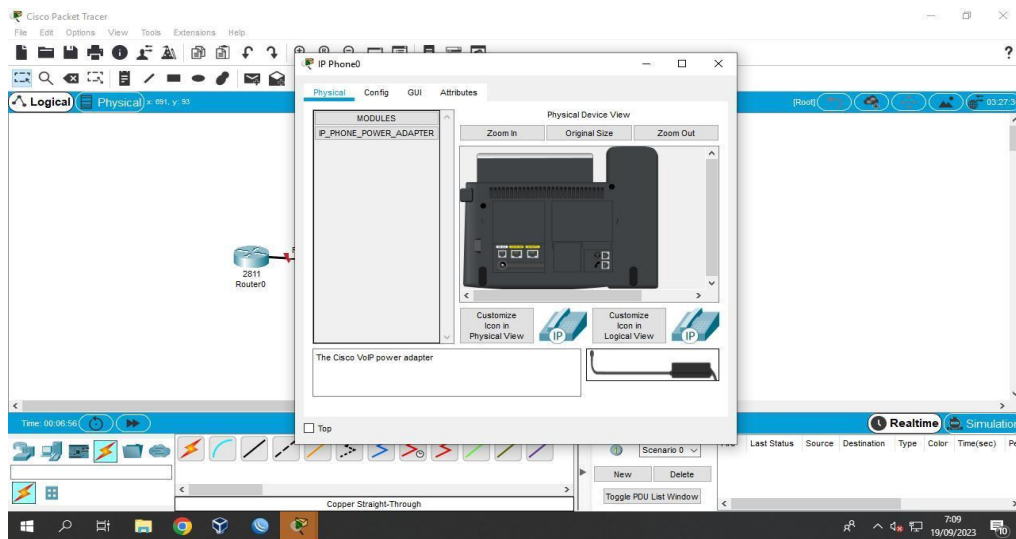


Setting switch


12.klik switch dan klik cul,enter,ketik (en), enter.

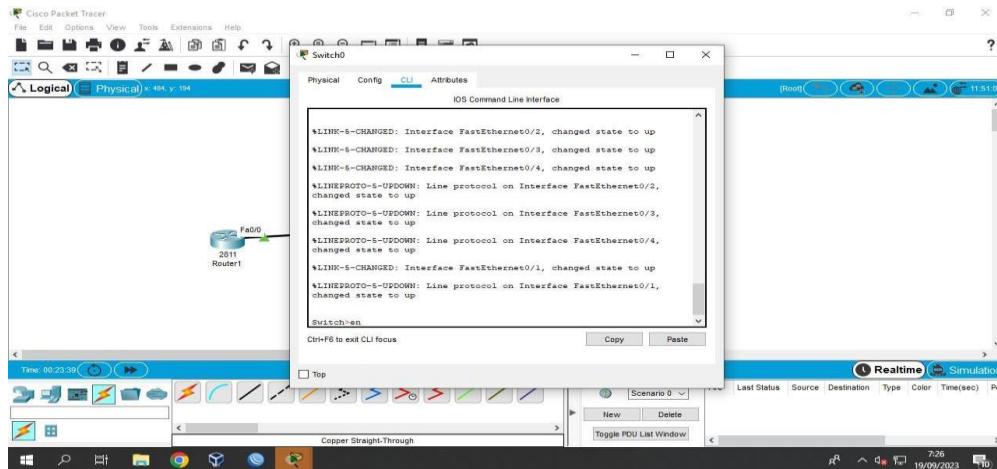


13.ketik configure terminal,enter.

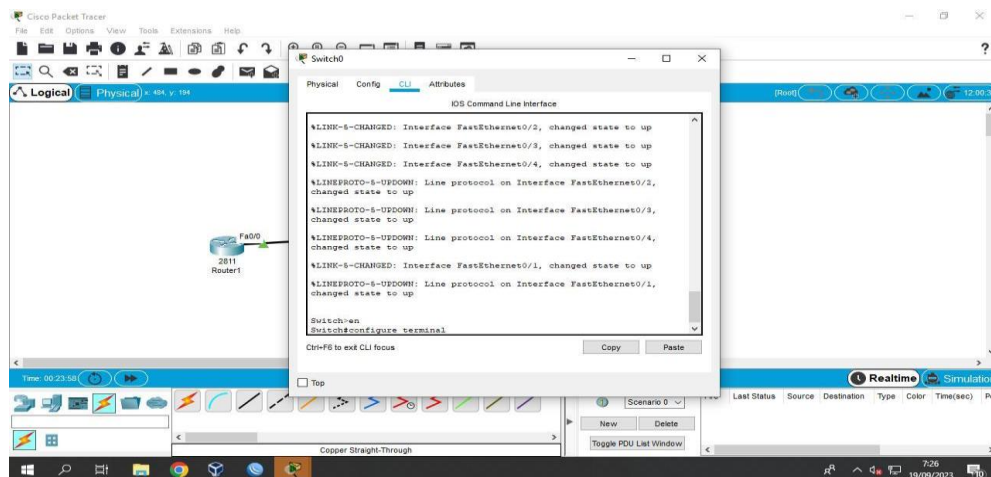


14.ketik,int range fa 0/1-24.enter

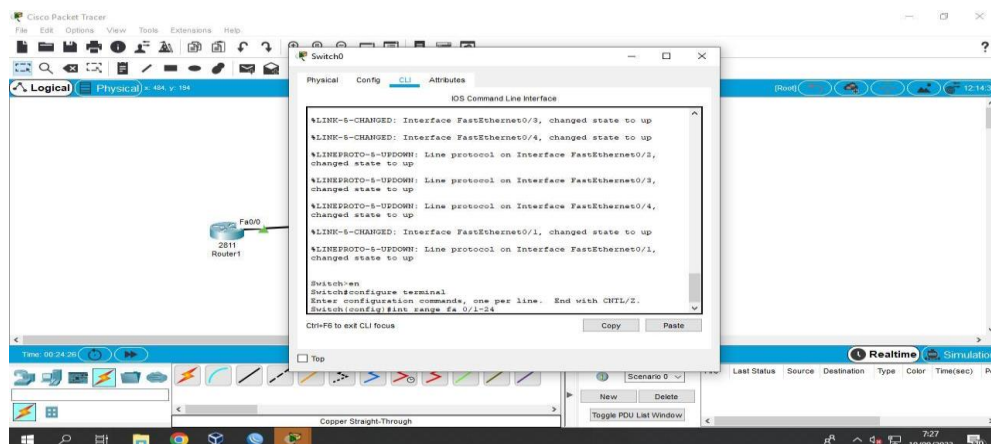

15.ketik switch voice vlan 1.enter

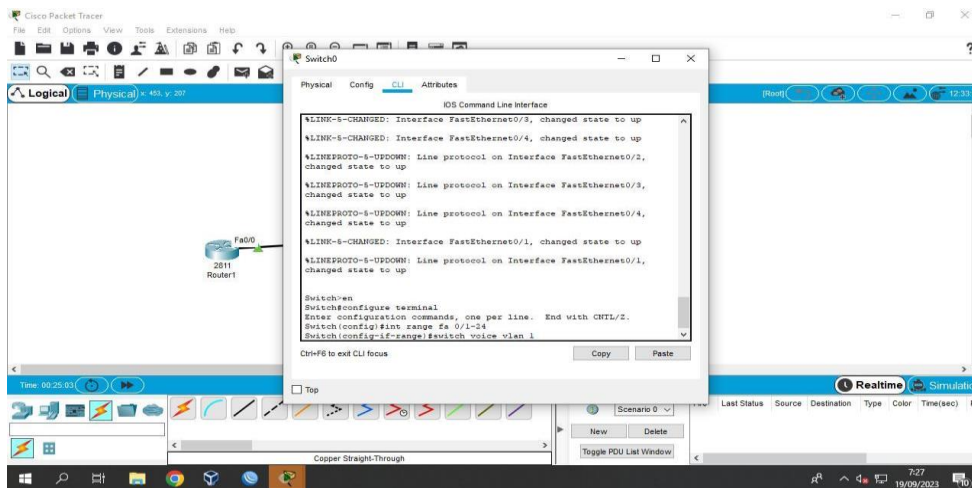


16.ketik,exit.enter

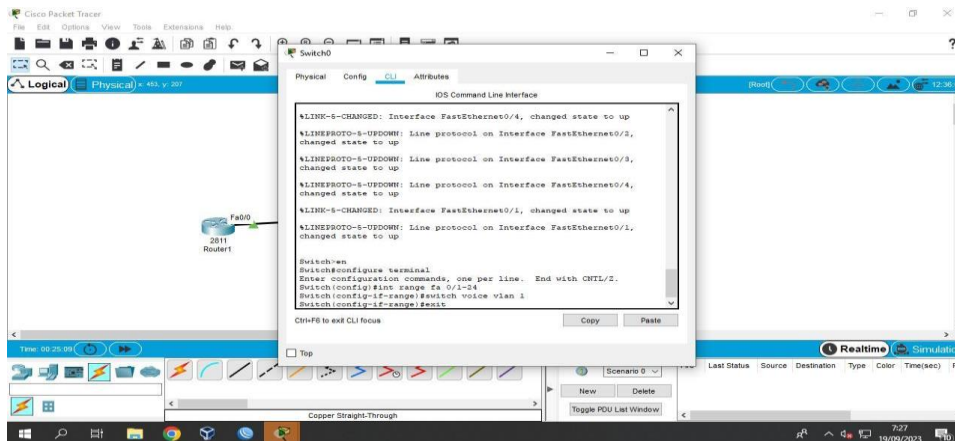


Setting router


17.klik router dan klik cul,enter,ketik (en), enter

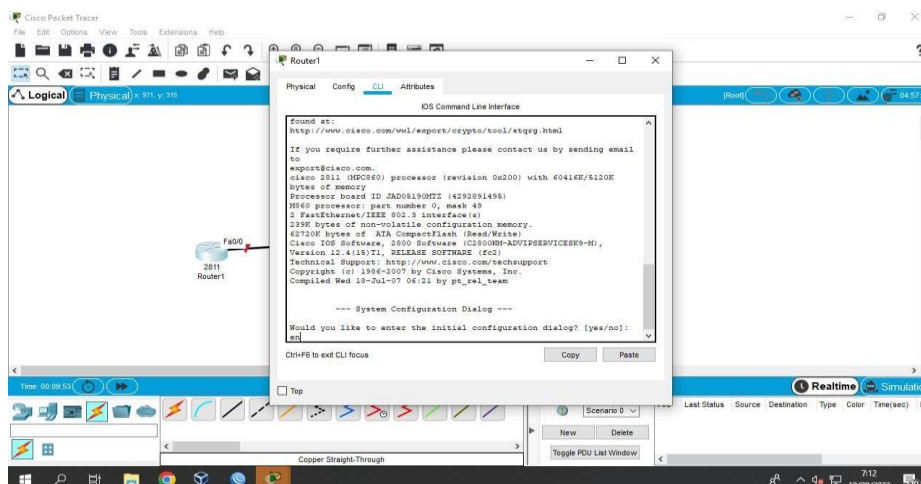


18.ketik configure terminal,enter

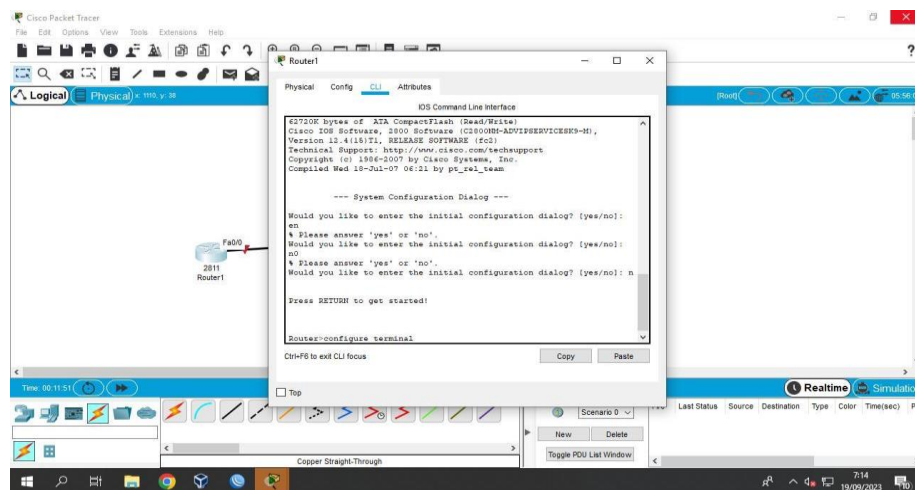


19.ketik IP dhcp pool voice.enter

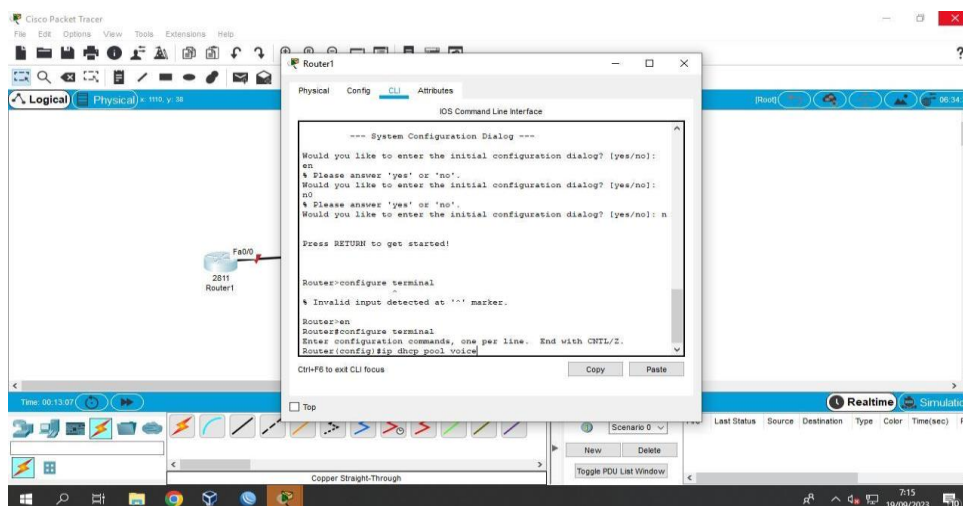


20.ketik network 192.168.30.0 255.255.255.0 (enter)

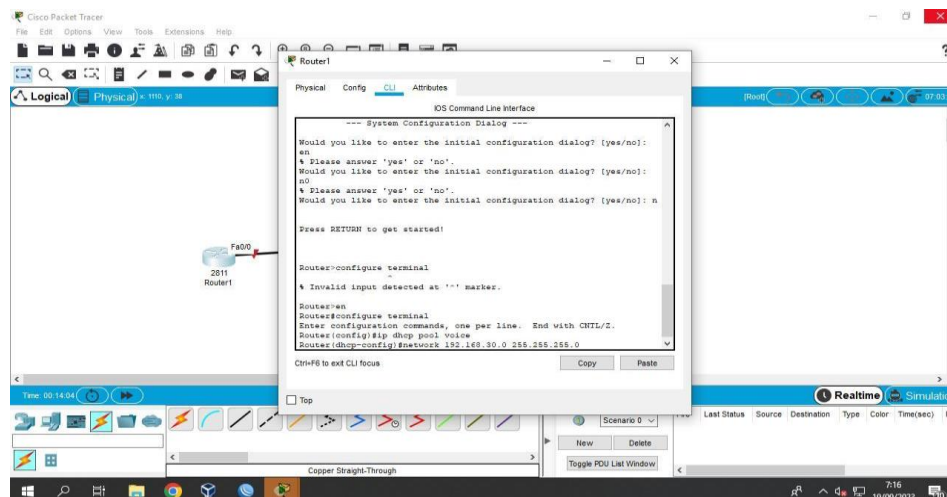


21.ketik default -router 192.168.30.1 (enter)

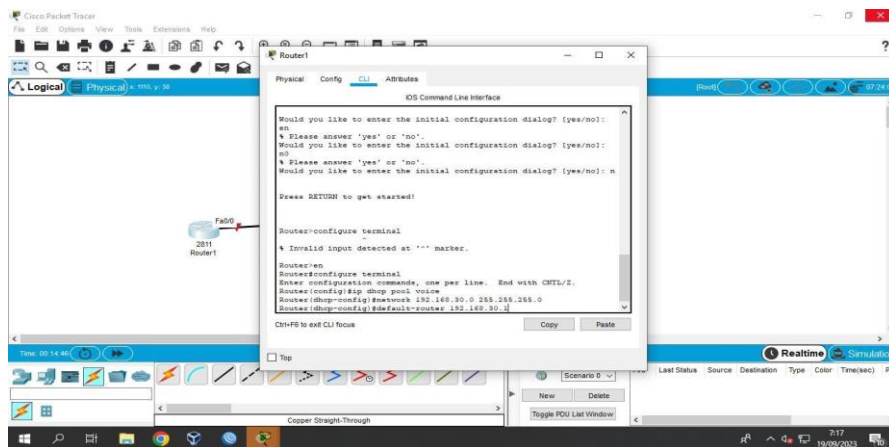


22.ketik option 150 IP 192.168.30.1 (enter)

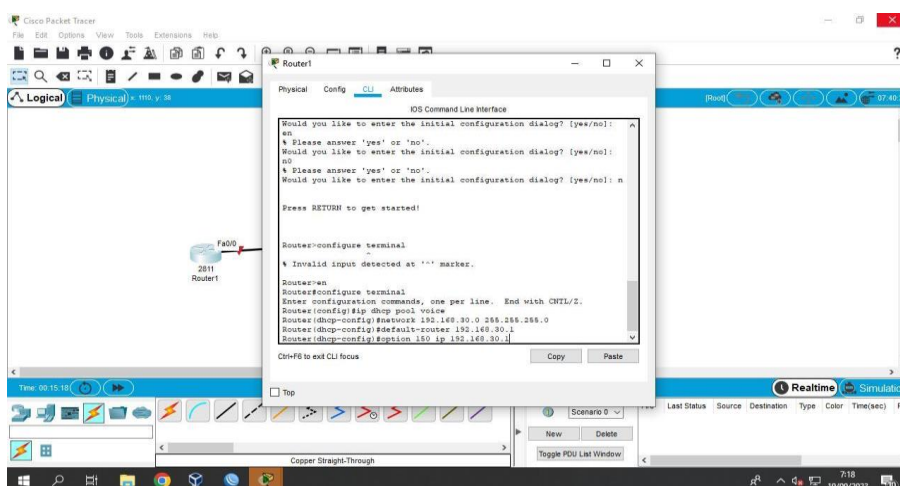


23.ketik exit (enter)

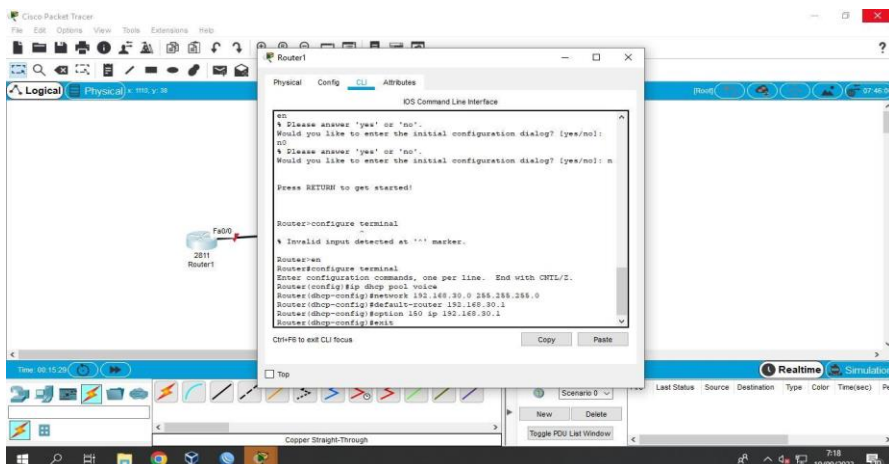


24.ketik IP dhcp excluded-address 192.168.30.1 (enter)

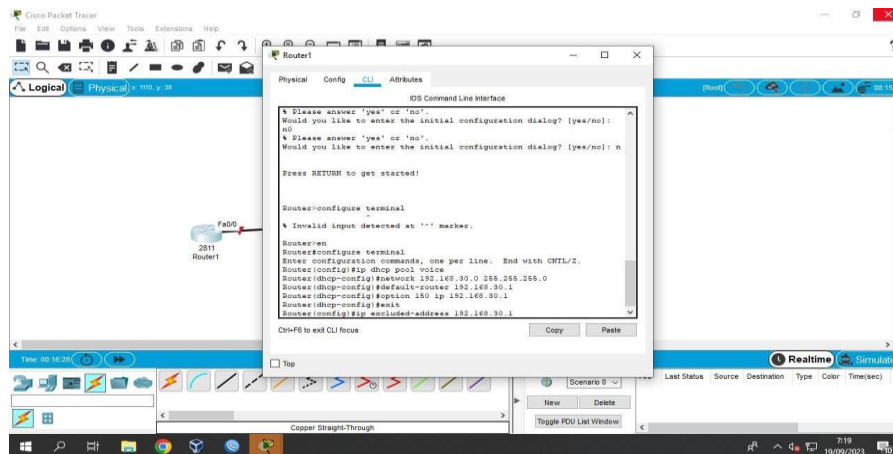


25.ketik int fastethernet 0/0 (enter)

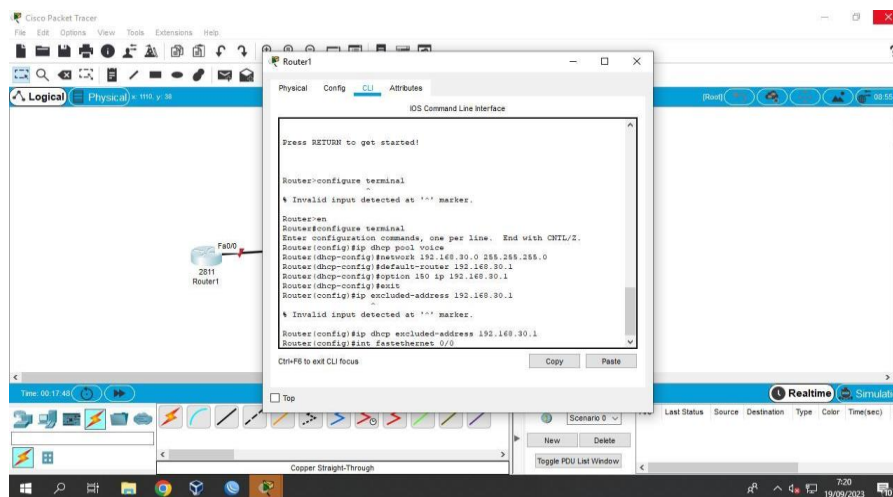


25.ketik ip add 192.268.30.1. 255.255.255.0 (enter)

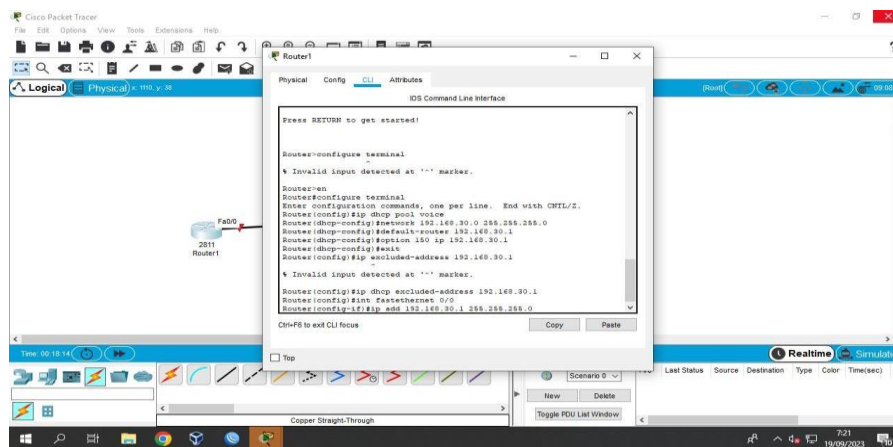


26.ketik no shut down (enter)

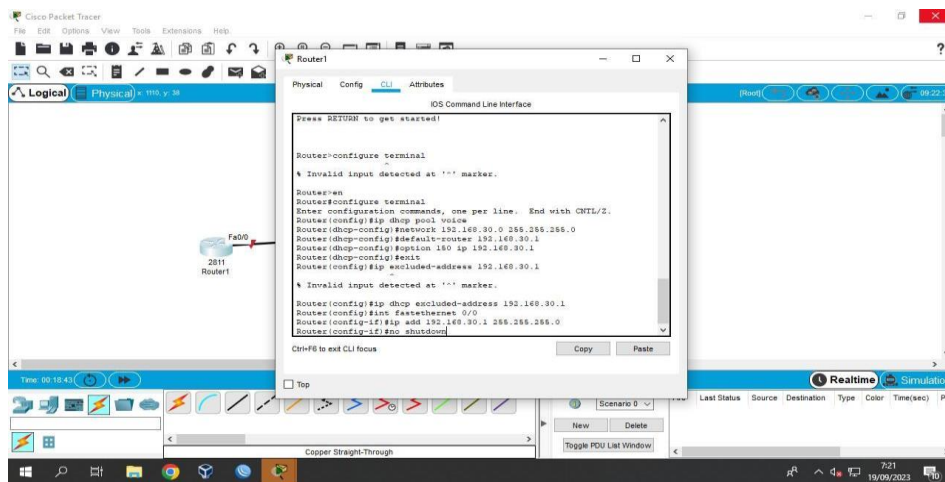


27.ketik exit (enter)

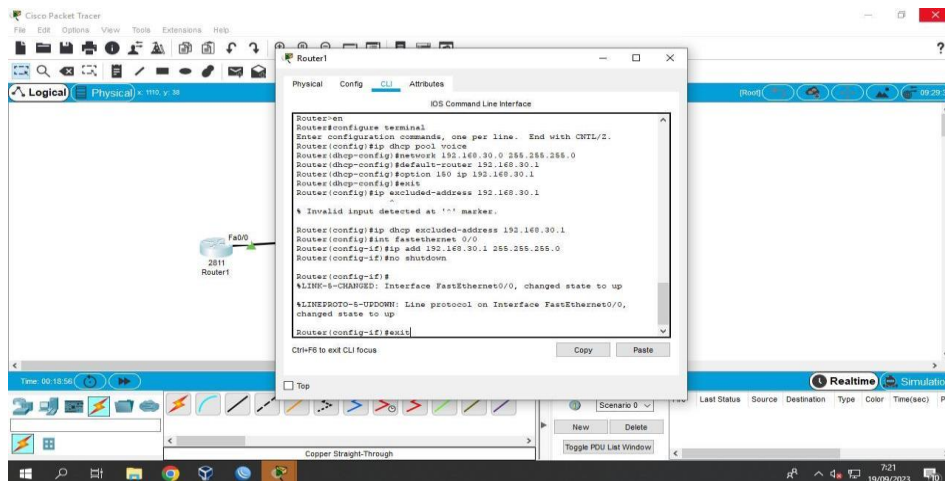


28.ketik max-ephone 3 (enter)

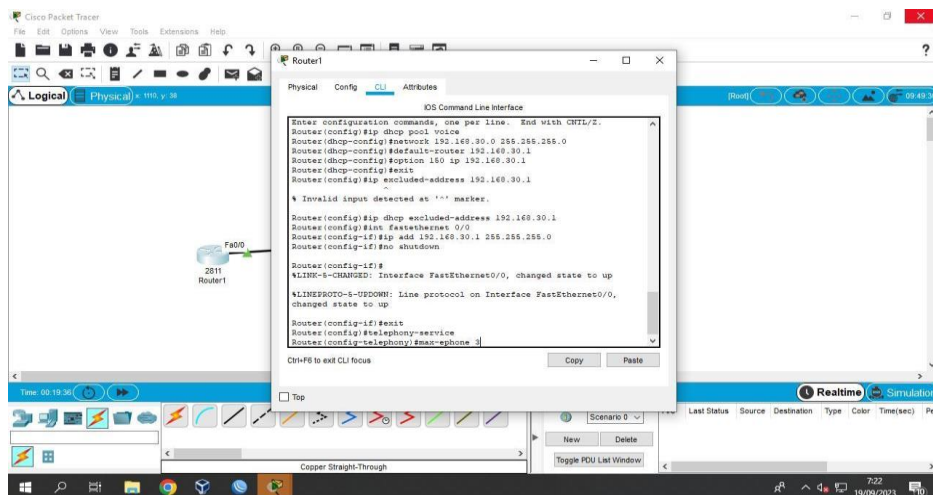


29.ketik max-dn 3 (enter)

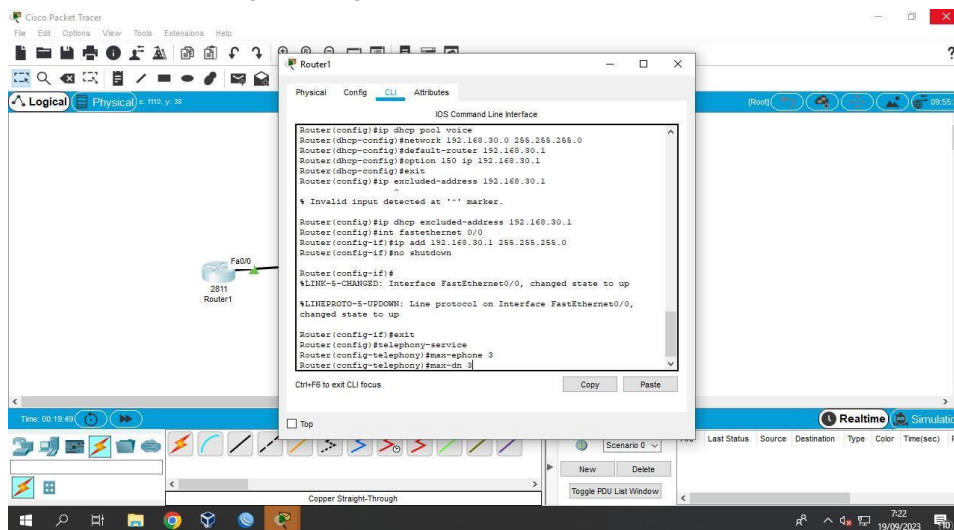


30.ketik source-address 192.168.30.1 port 2000 (enter)

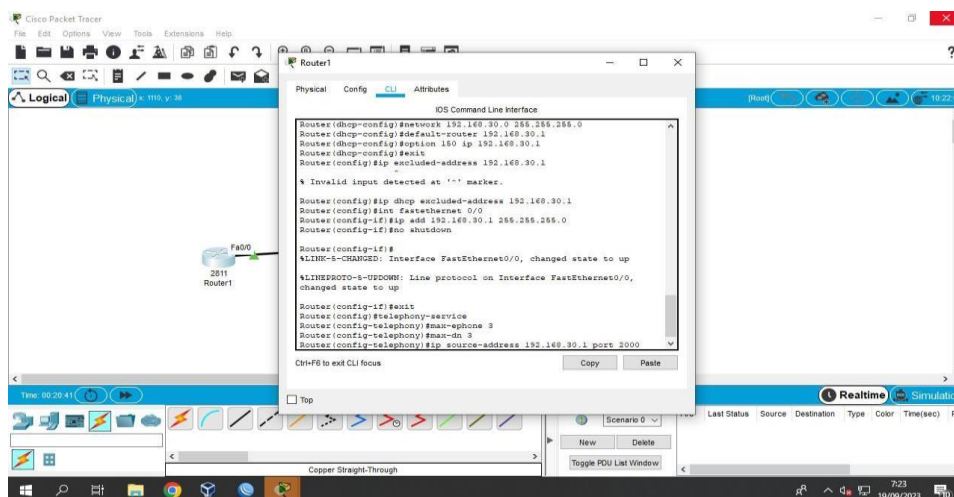


31.ketik, auto assing 1 to 3 (enter)

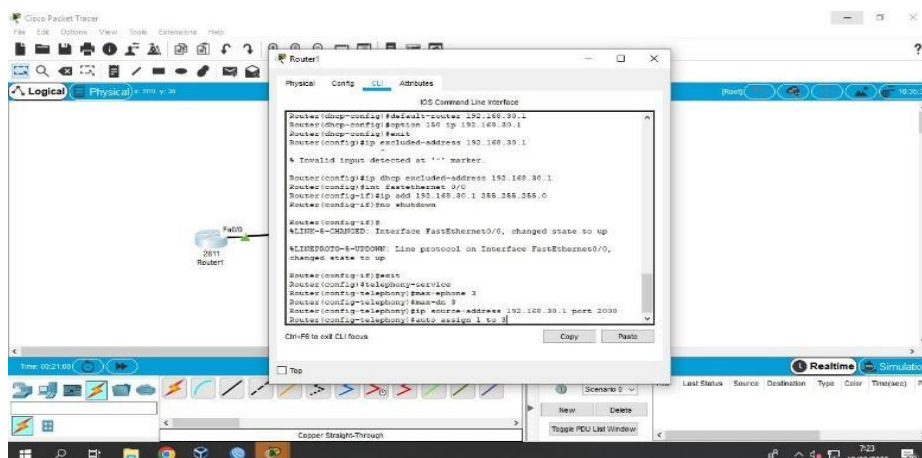


32.ketik ephone-dn 1(enter)

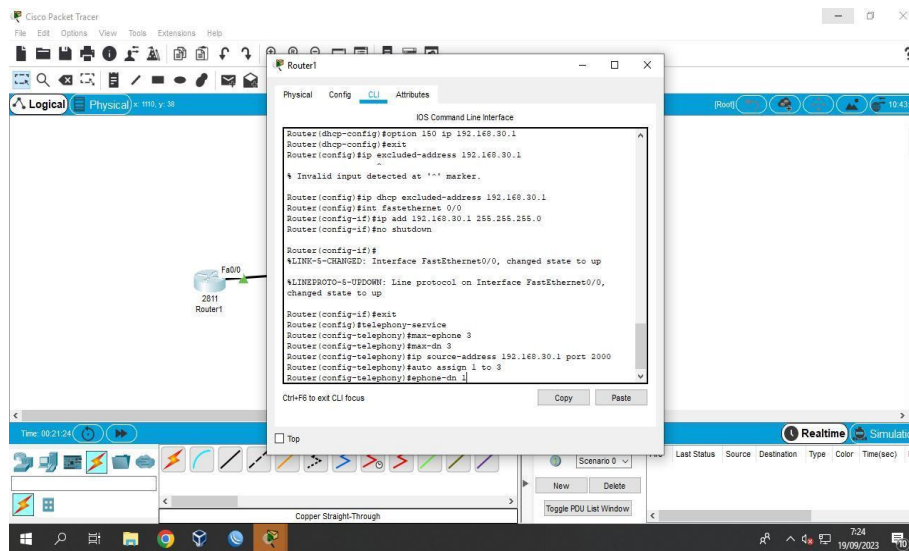


33.ketik number 245 (enter)

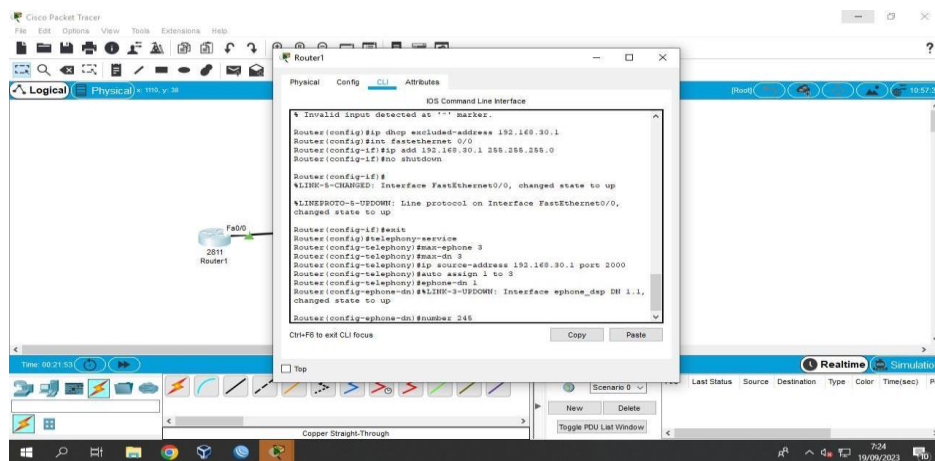


34.ketik ephone-dn 2 (enter)

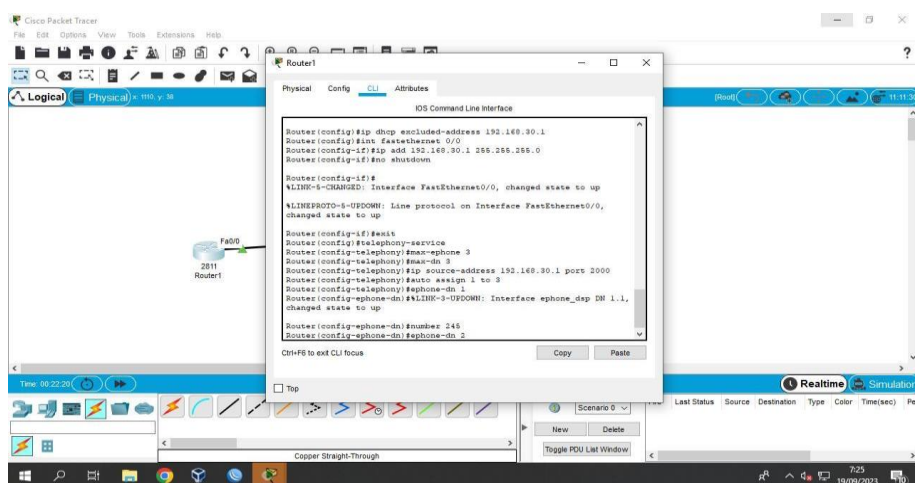


35.ketik number 246 (enter)

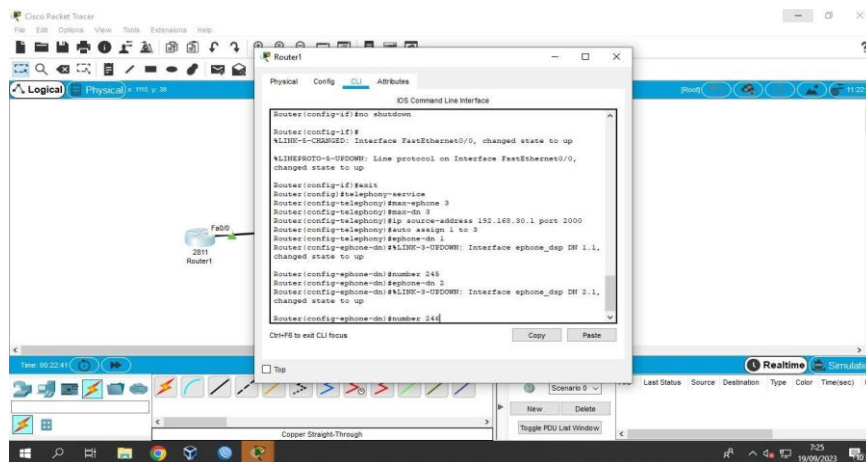



40.ketik ephone-dn 3 (enter)

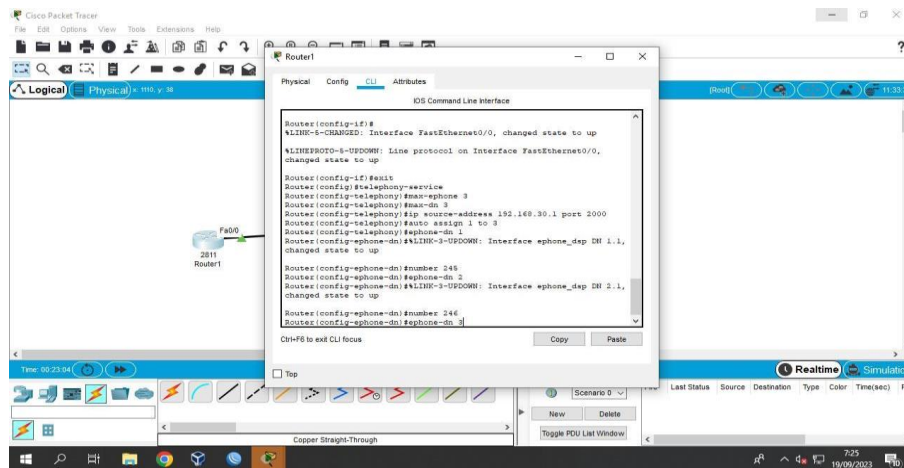

41.ketik numberr 247 (enter)

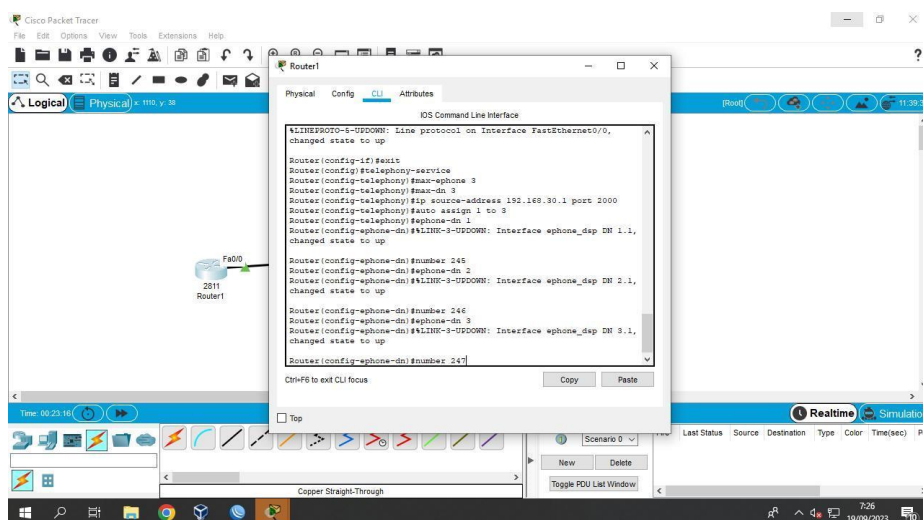

42.setelah menyeting switch dan router .lalu klik IP phone untuk menelpon/mengecek (jika sudah connection berarti sudah bisa

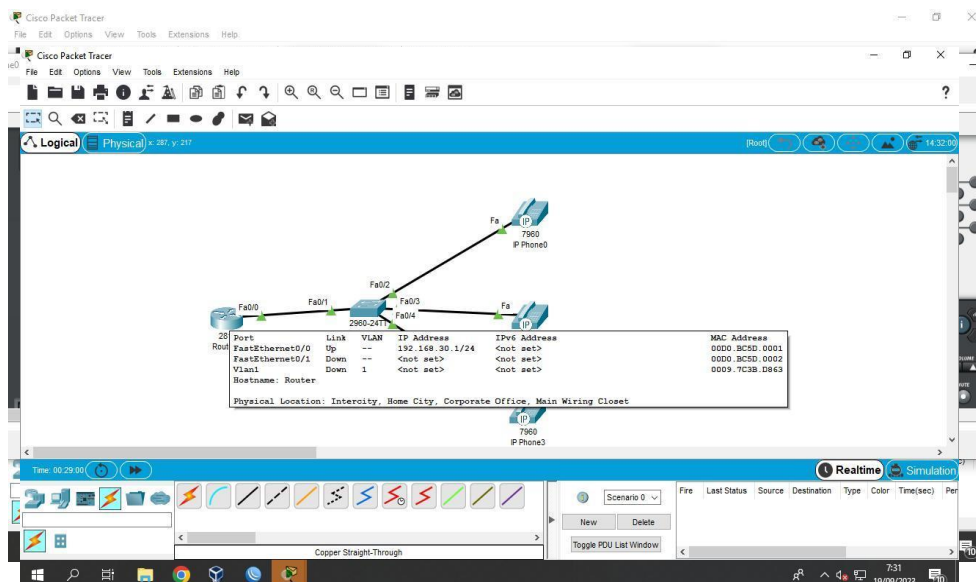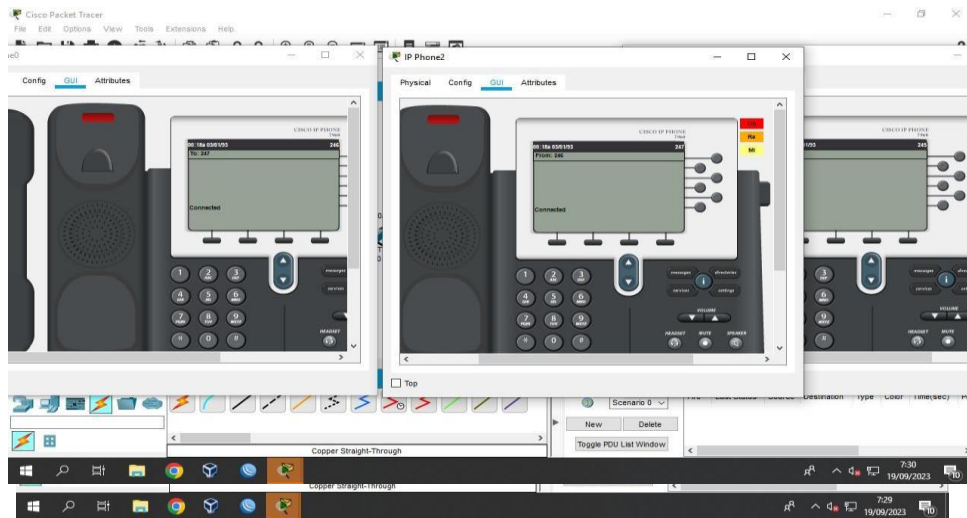

42.ini keterangan yang sudah kita setting tadi

