


REV.	DESCRIPTION	DRAW.	DATE.

性能:

- ... 额定电流: 3.0A
- ... 额定电压: 24V
- ... 耐电压: 500V
- ... 接触电阻: 30mΩ MAX
- ... 绝缘电阻: 500MΩ
- ... 工作温度: -40℃~+85℃
- ... 塑件(材质): LCP, 耐高温260℃
- ... 接触点(材质): 铜合金, 触点镀金3U

PART NO.	DIM A	DIM B
BC-60-2P240	2.4	4.30±0.25
BC-60-2P350	3.5	5.40±0.25

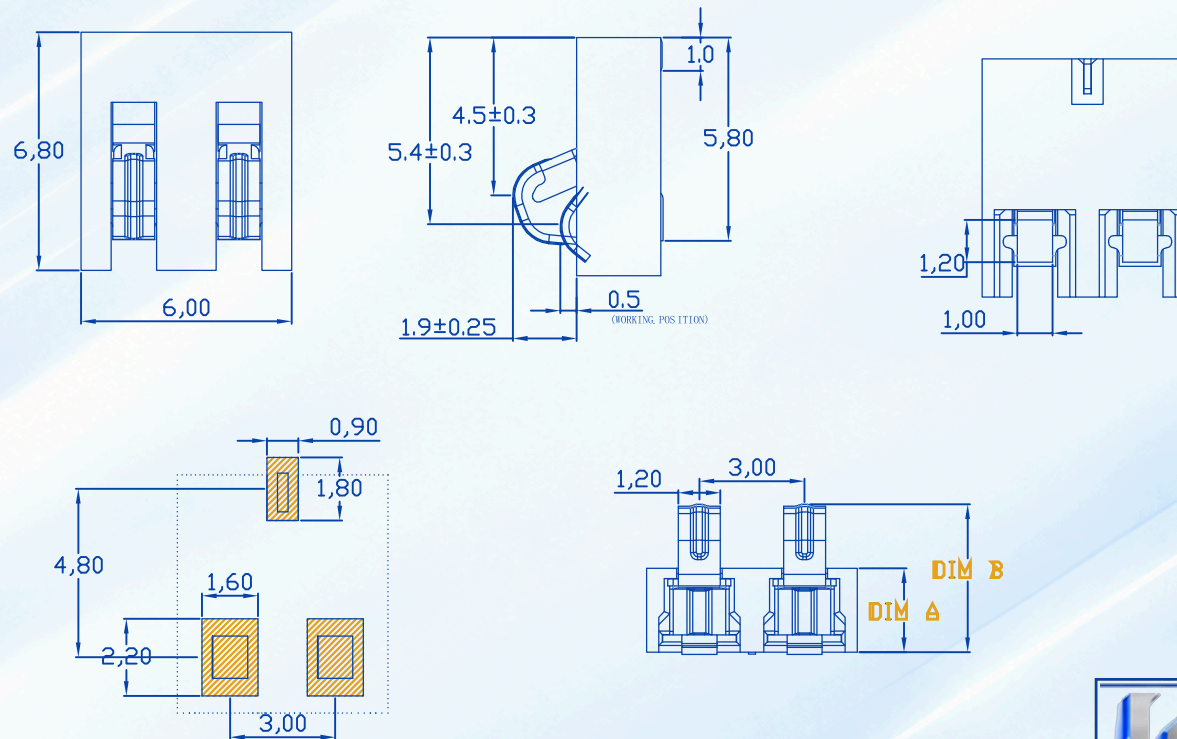

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:
X. ±0.35 X.° ±4°
X.X ±0.25 X.X° ±3°
X.XX ±0.15 X.XX° ±2°
X.XXX ±0.05 X.XXX° ±1°

		深圳市康生电子科技有限公司 Shenzhen Kangsheng Electronic Technology Co., Ltd.	
		TITLE: 电池连接器	
DESIGN	DATE	REV:	SCALE: 3:1
APPROVED	DATE	UNIT: mm	
MODEL: BC-60-2P系列全贴		SIZE: A4	SHEET: 1/1