

AXU3EGB expansion headers (40-pin IDC, 2.54 mm). J1 = board J15 (TX, mics), J2 = board J16 (ADCs).

Pin 2 (+5V) and 39/40 (+3.3V) of the FPGA board are left open. Clocks sit between GND conductors (pins 31–37).


Spare FPGA pins tied to GND must stay unused (inputs) in the XDC.

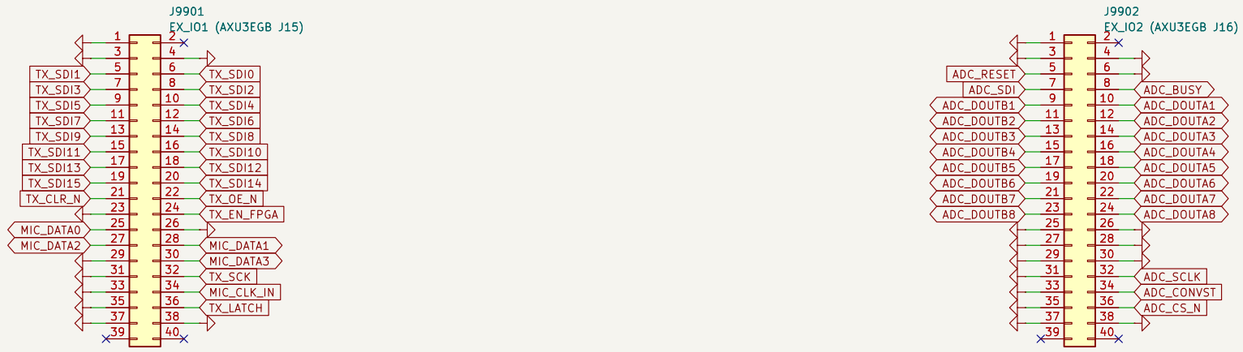

FPGA ribbon outputs: DRIVE 4, SLEW SLOW (near source-matched to the 100-ohm ribbon). DNP fallback: RC end termination 100 R + 47 pF per clock, fit only with DRIVE 8.

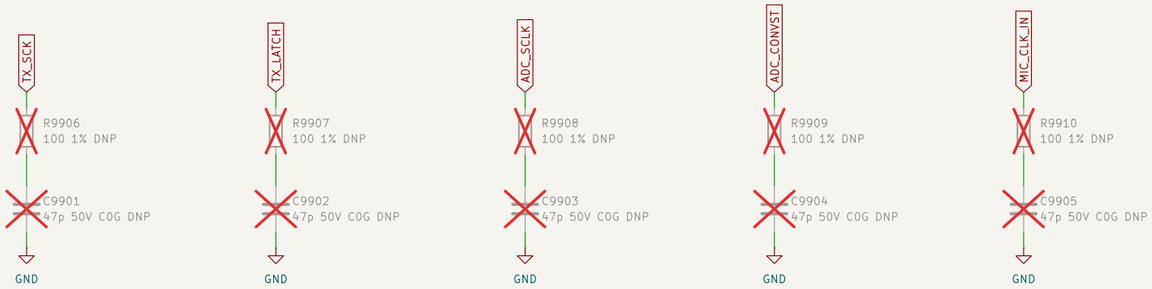

Idle pulls (FPGA unconfigured). TX_SCK, TX_LATCH, ADC_SCLK, ADC_CONVST and MIC_CLK_IN are pulled down in their clk_buf.

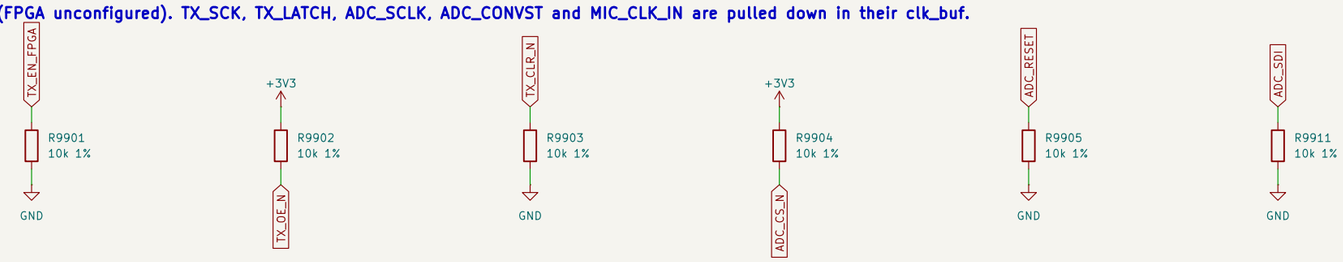

Hybrid 8x8 ultrasonic AESA

Sheet: /FPGA headers J1/J2/
File: headers.kicad_sch

Title: AXU3EGB headers J15/J16, idle pulls

Size: A3	Date: 2026-10-20	**Rev: 2**
KiCad E.D.A. 10.0.6		Id: 2/115