
Clock fan-out: 74LVC2G34 at the header, both gates on IN, 33 R series termination per output

Each output drives at most 4 loads (series termination works for a lumped load at the far end).

100 k pull-down keeps the clock low while the FPGA is unconfigured.

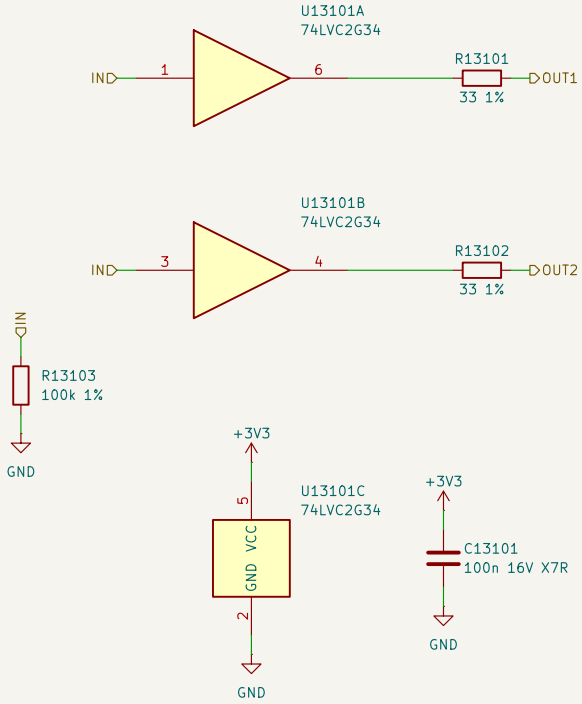

Hybrid 8x8 ultrasonic AESA		
Sheet: /Clock buffers/CLKB1/		
File: clk_buf.kicad_sch		
Title: Clock buffer (x7): 74LVC2G34, 33 R outputs		
Size: A4	Date: 2026-10-20	**Rev: 2**
KiCad E.D.A. 10.0.6		Id: 4/115