

ADC: AD7606C-16 (pin-compatible with AD7606B; symbol keeps AD7606 pin names)

Software mode: OS0-OS2 high. FPGA writes registers over SDI (pin 29, DB11/SDI) at boot:
RANGE_CHx = 0x1 (+-5 V), BANDWIDTH = 0xFF (high bandwidth on all 8 channels), CONFIG DOUT_FORMAT = 2 lines.
Pin 10 is WR on the B/C parts (parallel register writes only): held high. RANGE pin is ignored in software mode.
33 R source resistors on DOUTA/DOUTB/BUSY (ribbon to the FPGA).

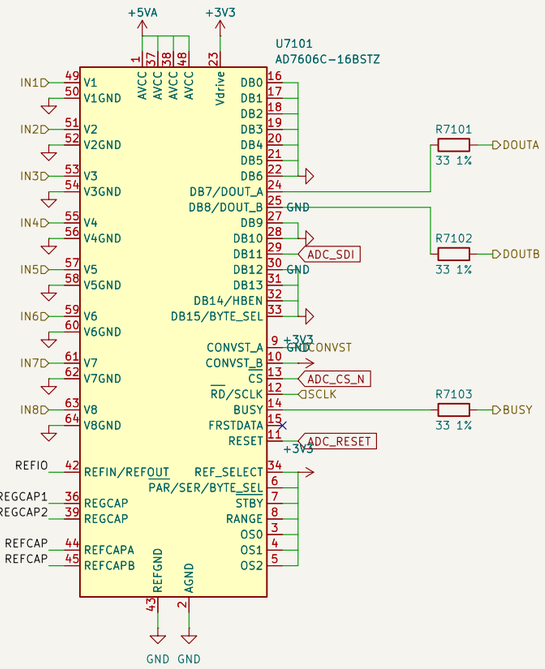

Decoupling: C1-C4 at the AVCC pins, C5 bulk, C6 at VDRIVE; REGCAP, REFCAP, REFIN/OUT per datasheet

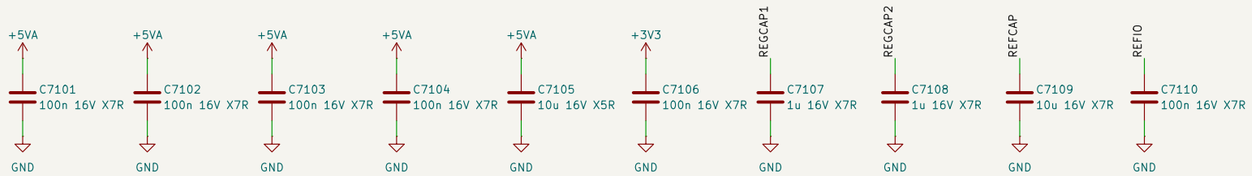

Sheet: /ADC1/
File: adc.kicad_sch

Title:

Size: A3 | Date: | **Rev:**
KiCad E.D.A. 10.0.6 | Id: 66/110