

12 V INPUT (jack, polyfuse, SS54)




+5V TPS54202 buck (TI ref. design)

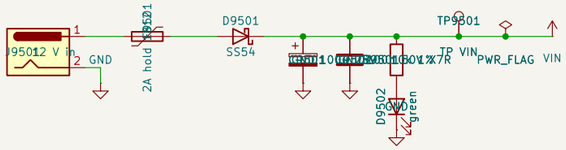


GROUND single plane, test points

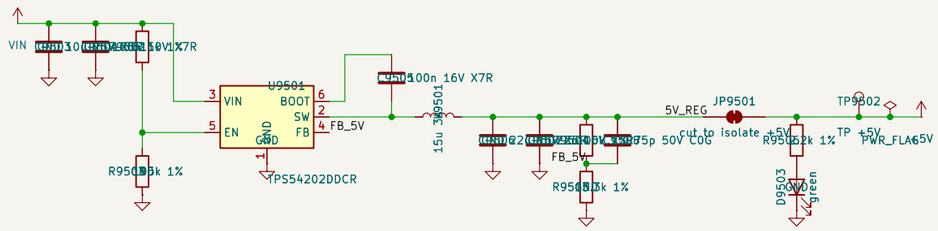


3V3_MIC ferrite filter for the MEMS mics

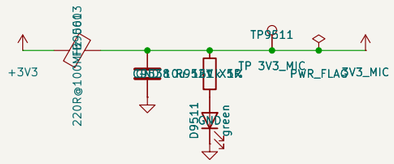


+/−6.5 V PRE-REGULATOR TPS65131 (feeds the LDOs)

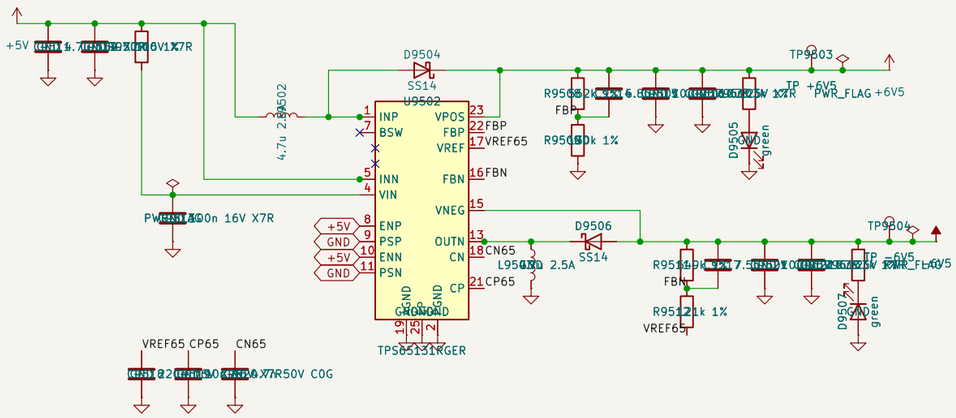


ANALOG RAILS TPS7A4701 +5VA, TPS7A3301 −5VA

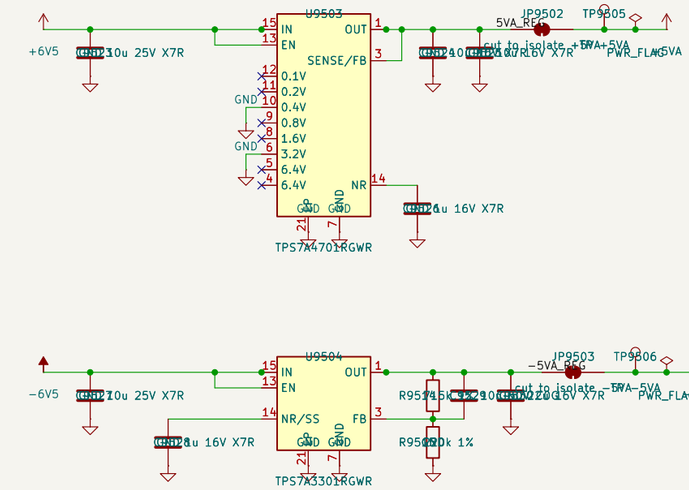

VDRV 15 V LM2731X boost; J2 shunt = TX power

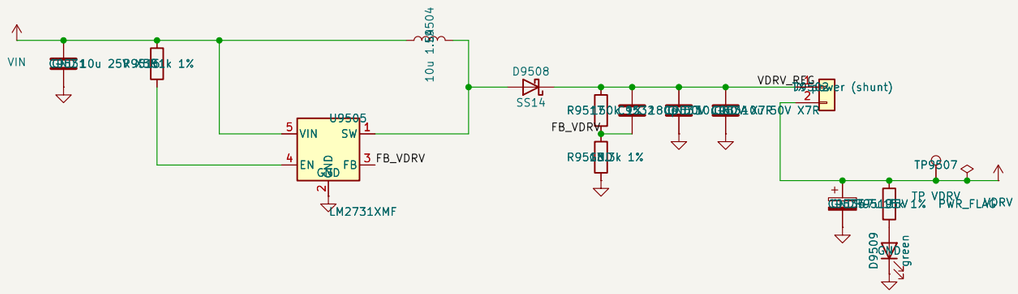

+3V3 TLV1117-33

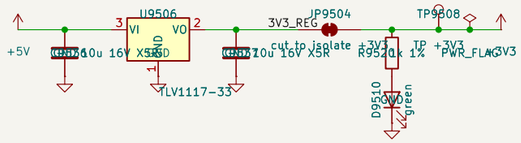

Sheet: /Power/	
File: power.kicad_sch	
Title:	
Size: A3	Date:
KiCad E.D.A. 10.0.6	**Rev:** Id: 109/110