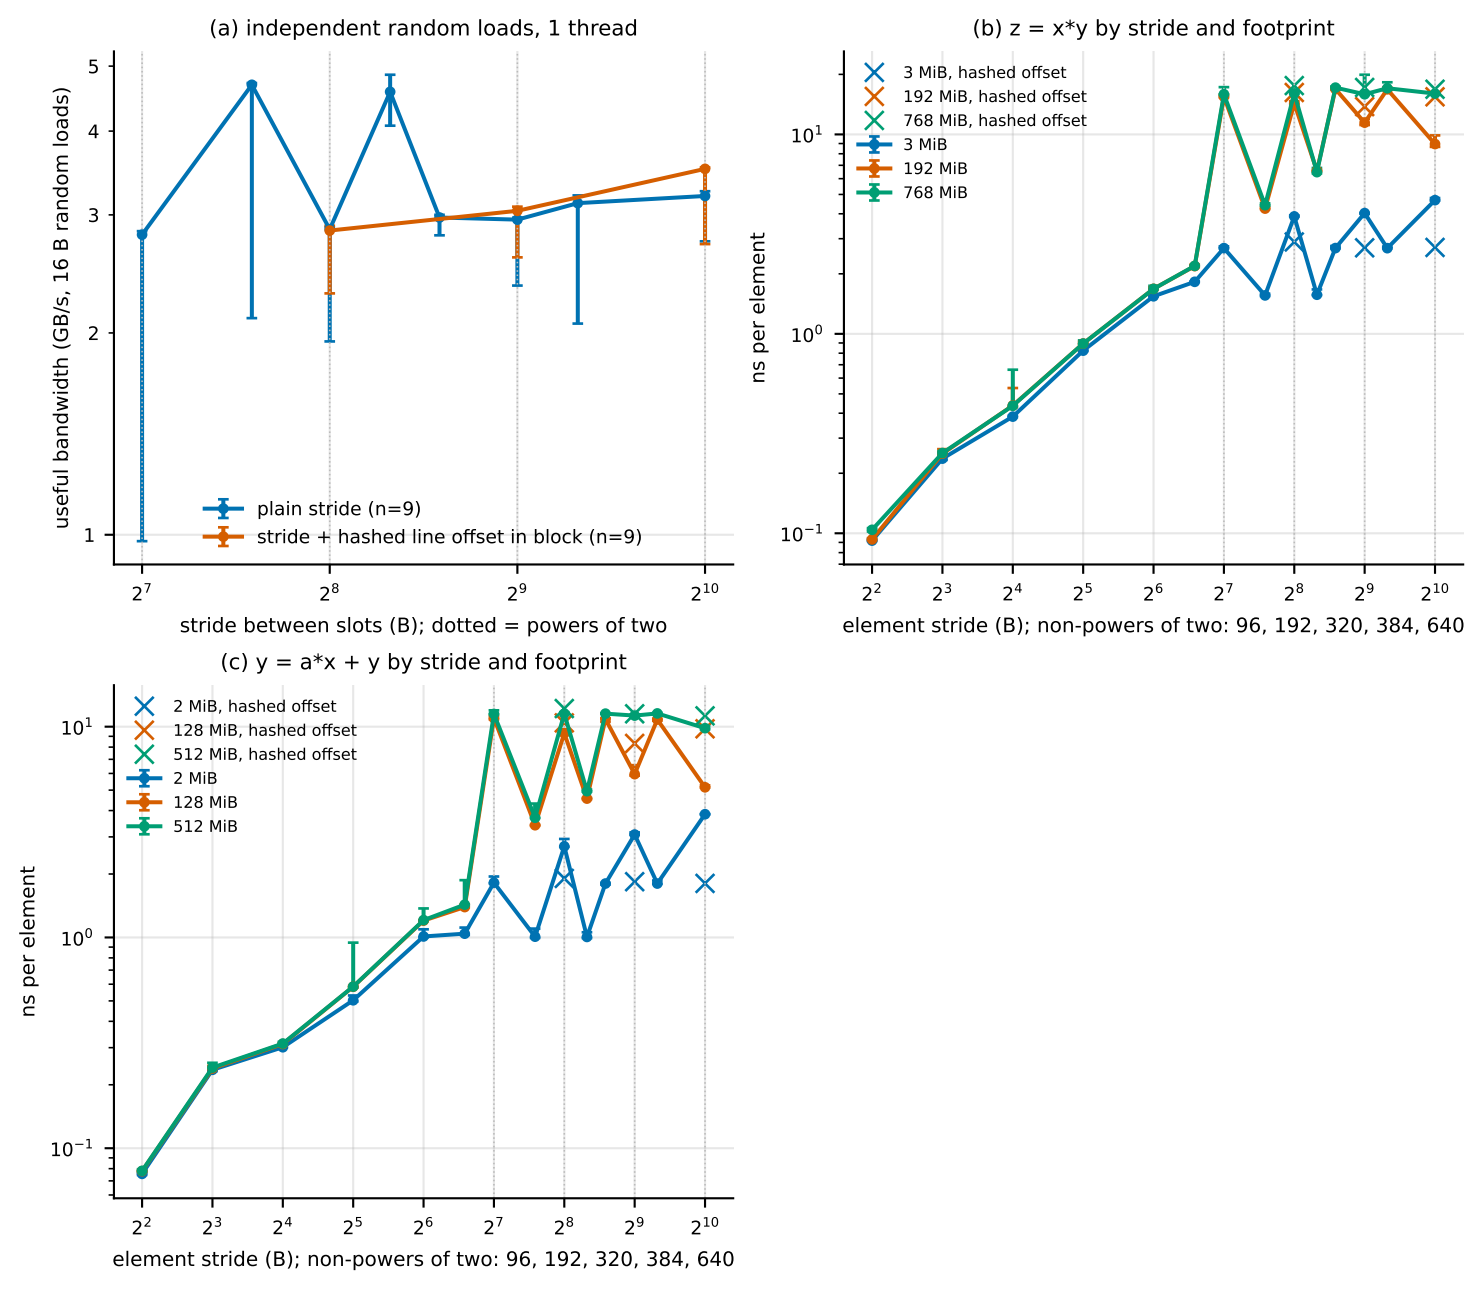
(a) independent random loads, 1 thread
useful bandwidth (GB/s, 16 B random loads)
plain stride (n=9)
stride + hashed line offset in block (n=9)
stride between slots (B); dotted = powers of two
(b) z = x*y by stride and footprint
ns per element
3 MiB, hashed offset
192 MiB, hashed offset
768 MiB, hashed offset
3 MiB
192 MiB
768 MiB
element stride (B); non-powers of two: 96, 192, 320, 384, 640
(c) y = a*x + y by stride and footprint
ns per element
2 MiB, hashed offset
128 MiB, hashed offset
512 MiB, hashed offset
2 MiB
128 MiB
512 MiB
element stride (B); non-powers of two: 96, 192, 320, 384, 640