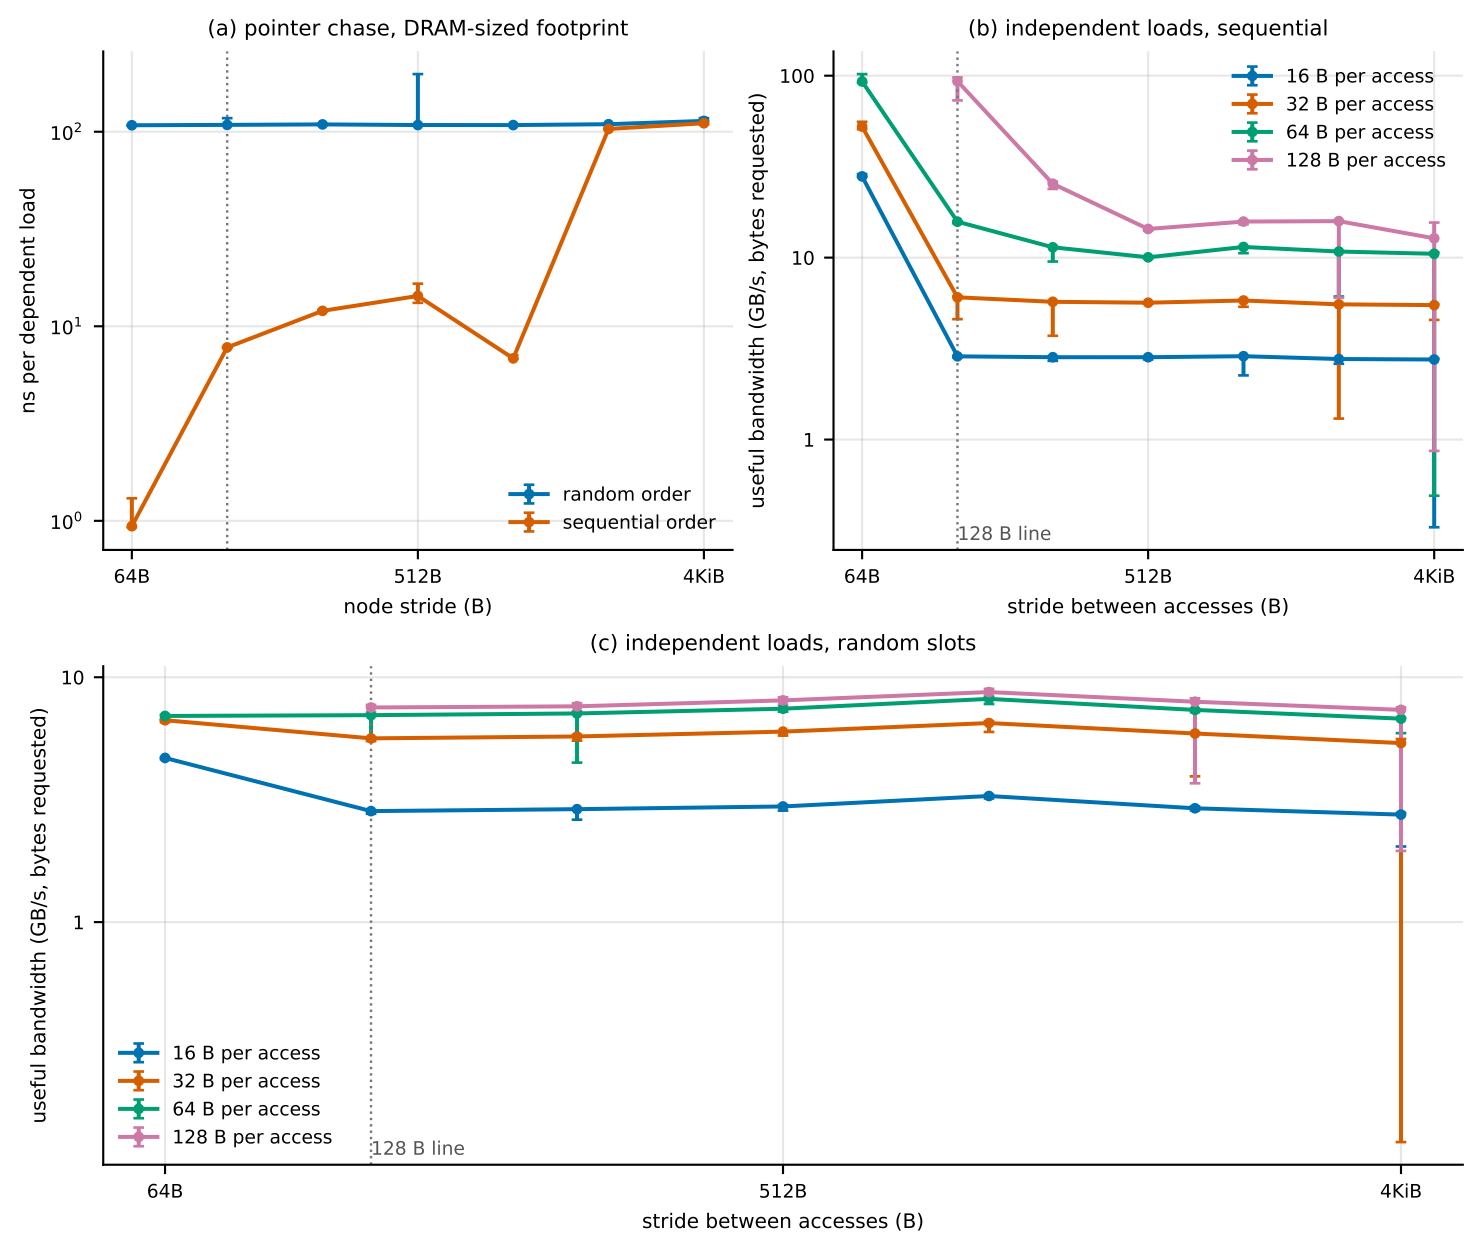
(a) pointer chase, DRAM-sized footprint
ns per dependent load
10^2
10^1
10^0
random order
sequential order
64B
512B
4KiB
node stride (B)
(b) independent loads, sequential
useful bandwidth (GB/s, bytes requested)
100
10
1
16 B per access
32 B per access
64 B per access
128 B per access
128 B line
64B
512B
4KiB
stride between accesses (B)
(c) independent loads, random slots
useful bandwidth (GB/s, bytes requested)
10
1
16 B per access
32 B per access
64 B per access
128 B per access
128 B line
64B
512B
4KiB
stride between accesses (B)