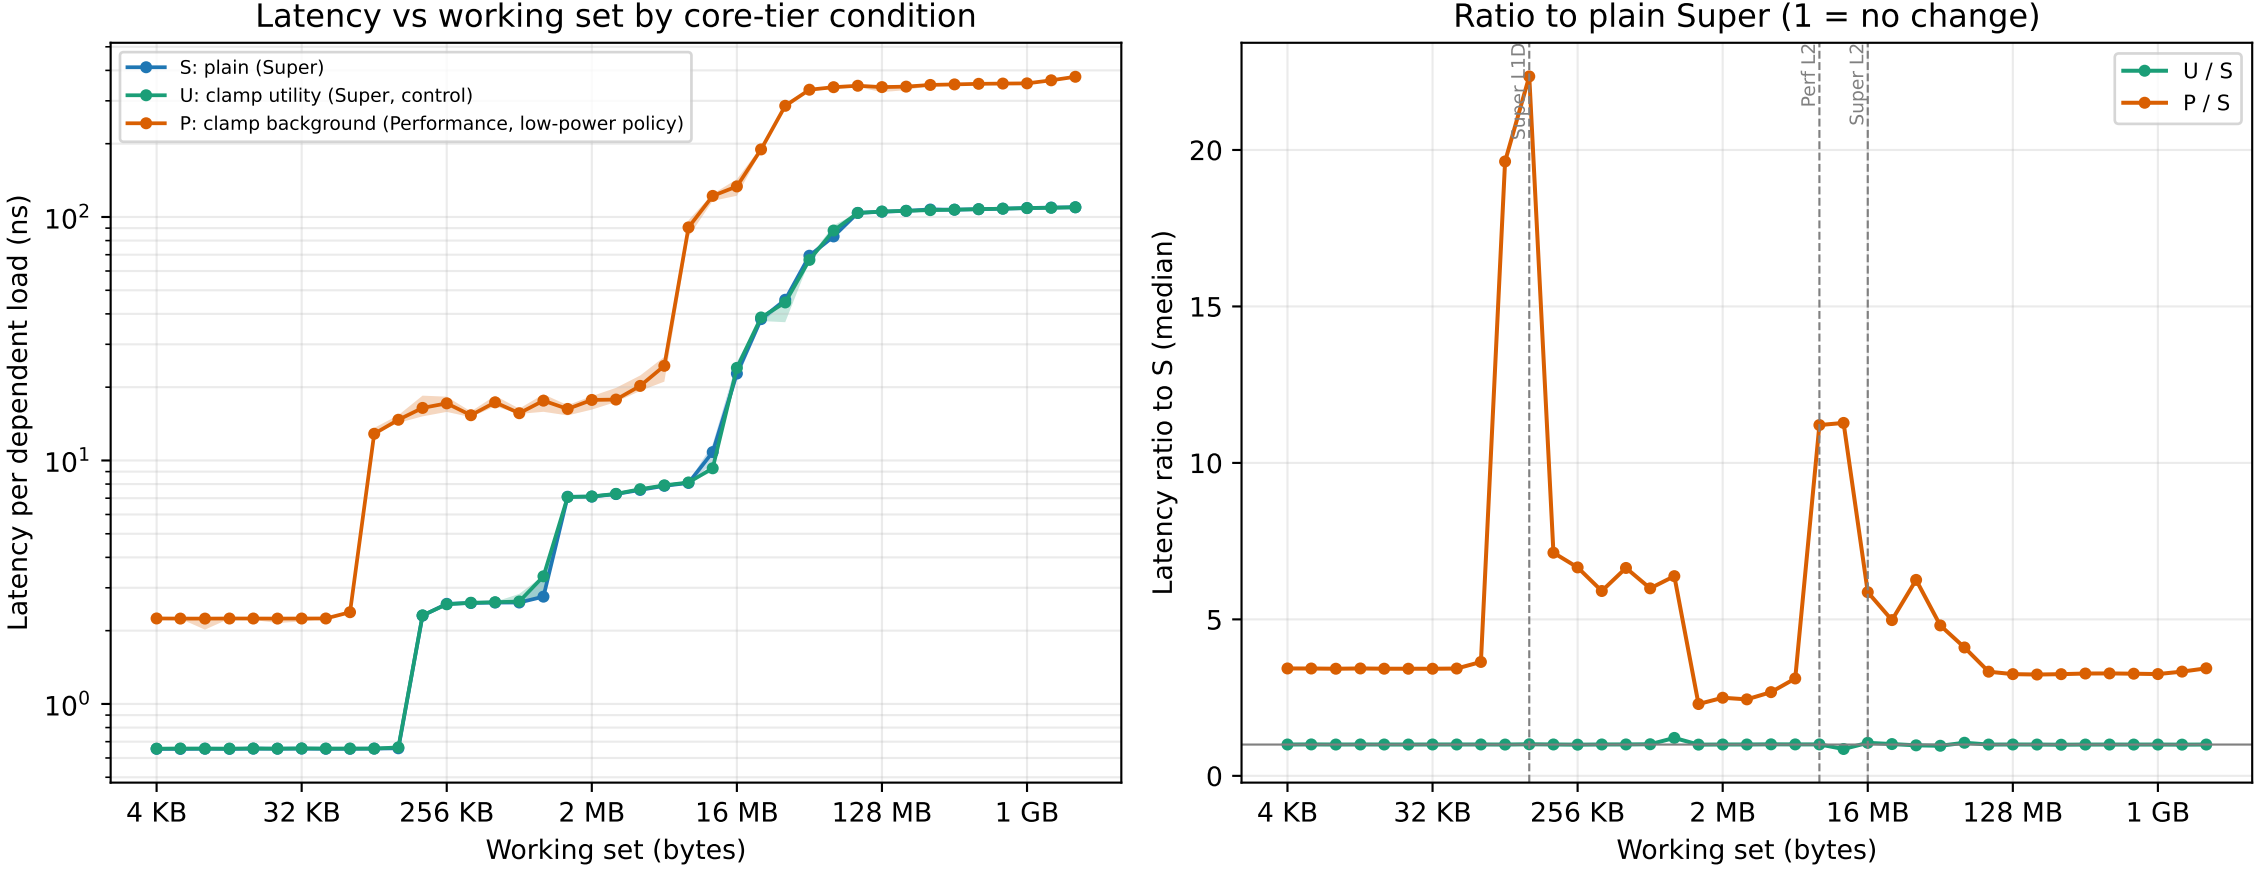
Latency vs working set by core-tier condition
S: plain (Super)
U: clamp utility (Super, control)
P: clamp background (Performance, low-power policy)
Latency per dependent load (ns)
10^2
10^1
10^0
4 KB
32 KB
256 KB
2 MB
16 MB
128 MB
1 GB
Working set (bytes)
Ratio to plain Super (1 = no change)
Super L1D
Perf L2
Super L2
U / S
P / S
Latency ratio to S (median)
20
15
10
5
0
4 KB
32 KB
256 KB
2 MB
16 MB
128 MB
1 GB
Working set (bytes)