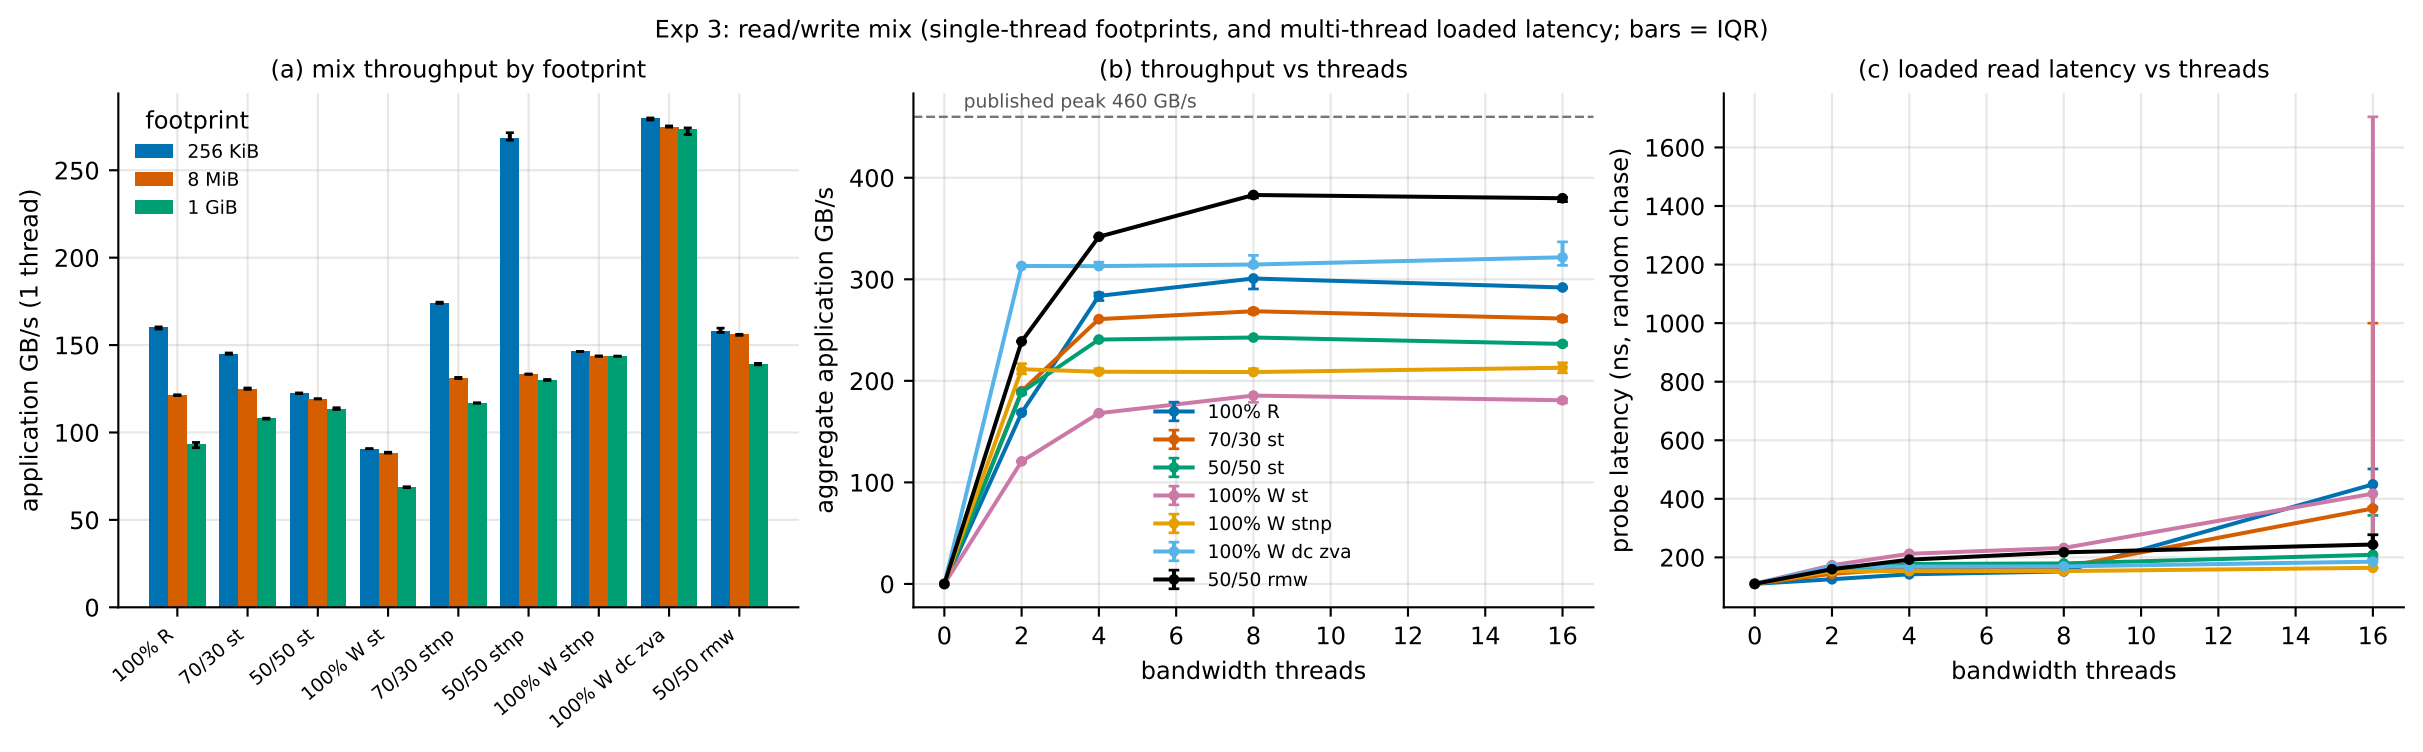
Exp 3: read/write mix (single-thread footprints, and multi-thread loaded latency; bars = IQR)
(a) mix throughput by footprint
footprint
256 KiB
8 MiB
1 GiB
application GB/s (1 thread)
0
50
100
150
200
250
100% R
70/30 st
50/50 st
100% W st
70/30 stnp
50/50 stnp
100% W stnp
100% W dc zva
50/50 rmw
(b) throughput vs threads
published peak 460 GB/s
aggregate application GB/s
0
100
200
300
400
100% R
70/30 st
50/50 st
100% W st
100% W stnp
100% W dc zva
50/50 rmw
0
2
4
6
8
10
12
14
16
bandwidth threads
(c) loaded read latency vs threads
probe latency (ns, random chase)
200
400
600
800
1000
1200
1400
1600
0
2
4
6
8
10
12
14
16
bandwidth threads