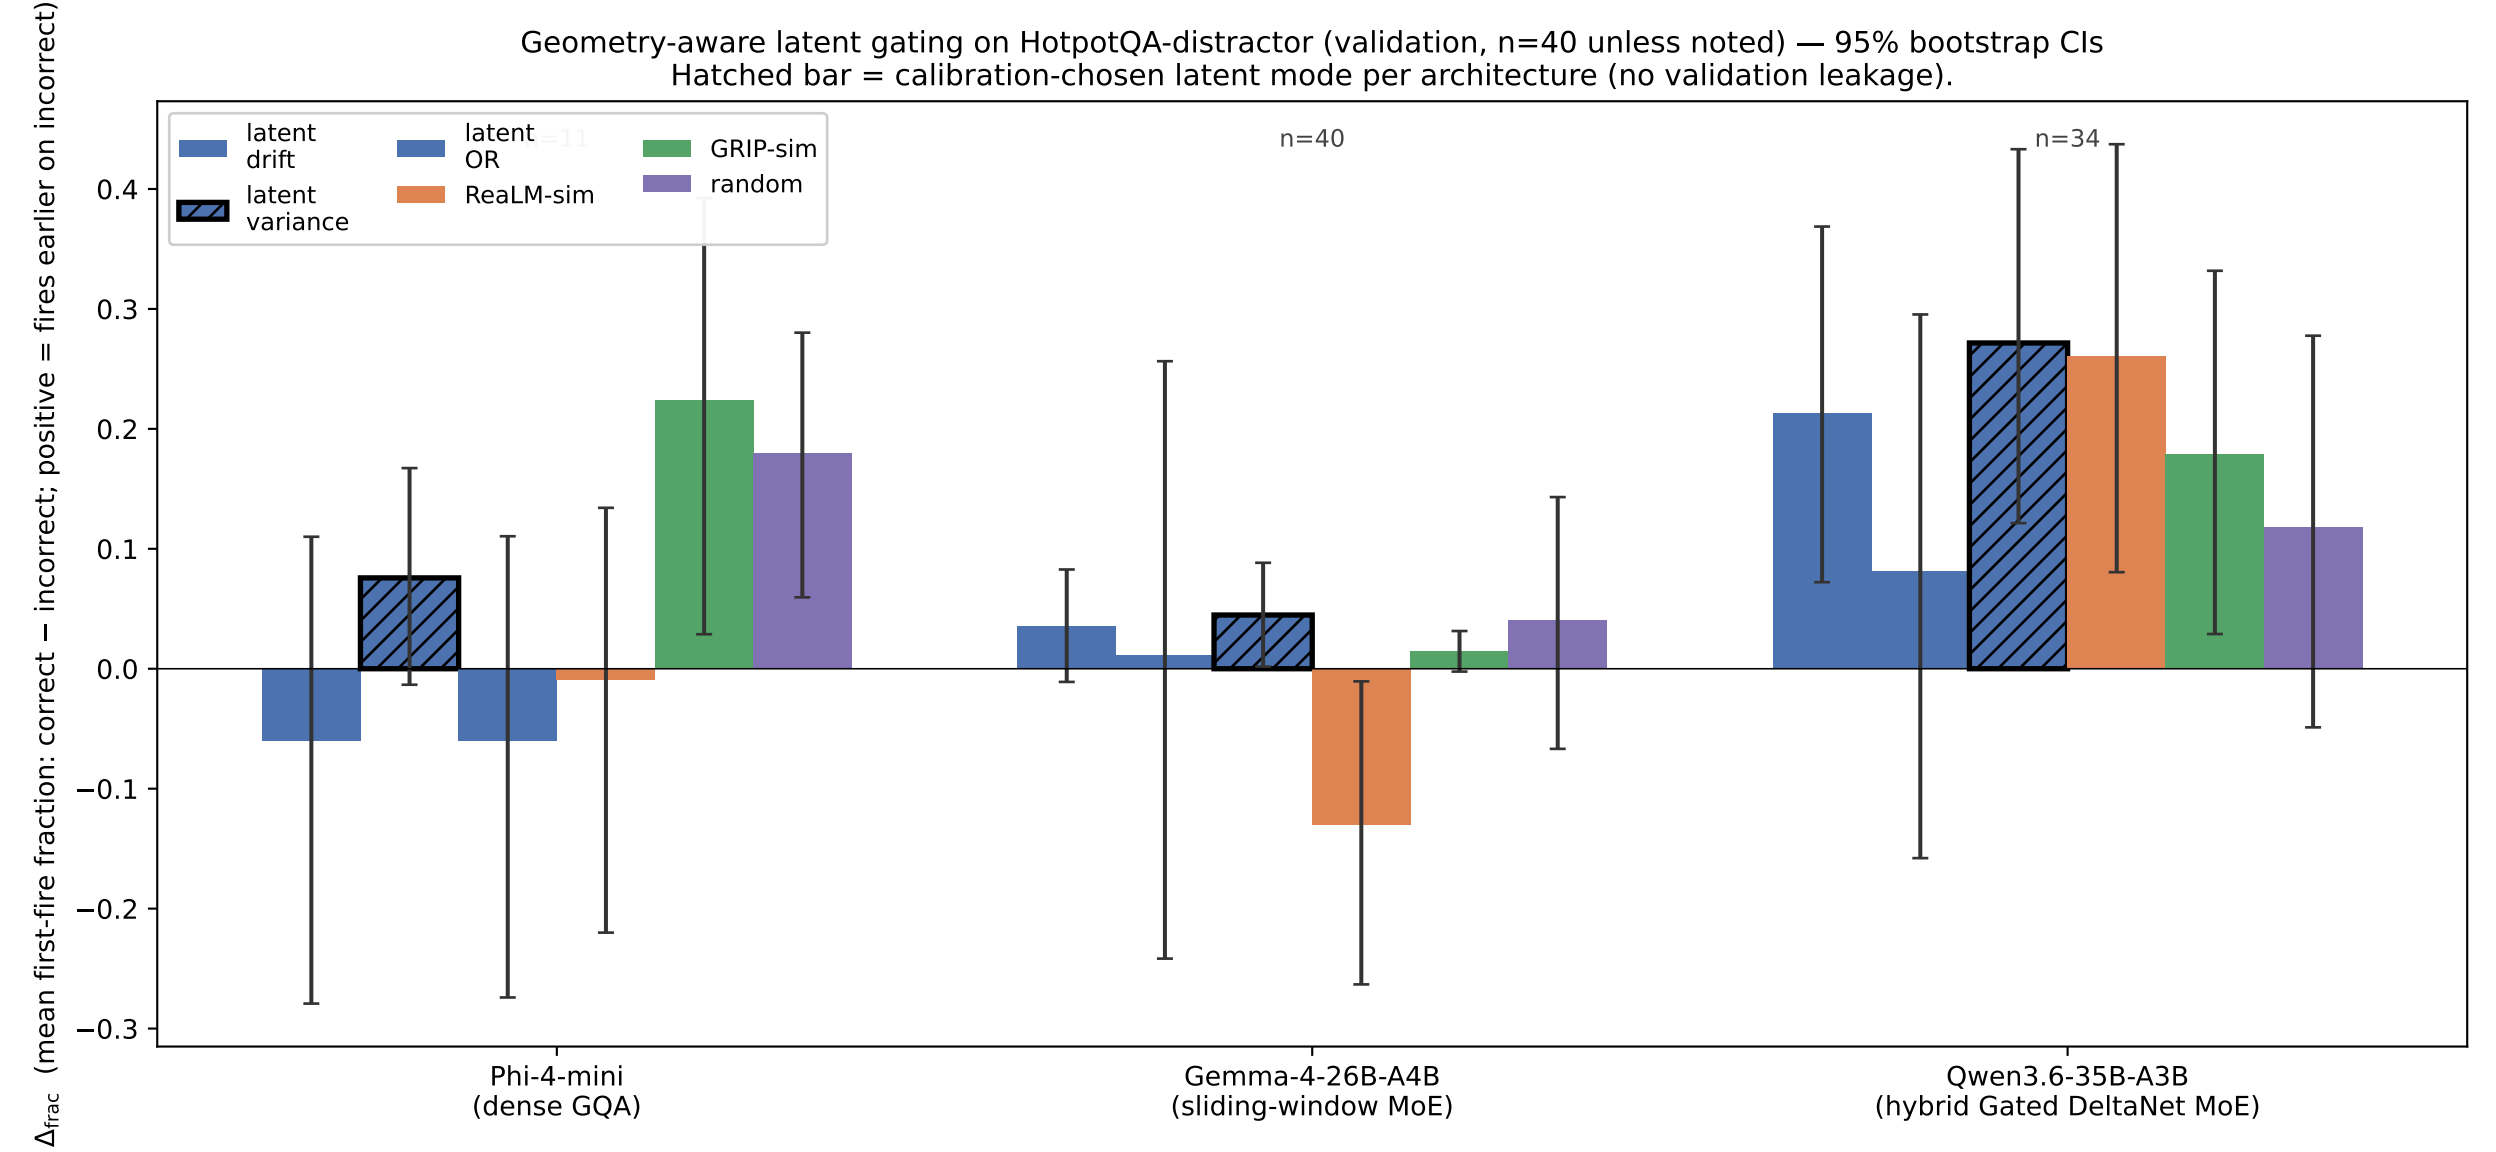
Geometry-aware latent gating on HotpotQA-distractor (validation, n=40 unless noted) — 95% bootstrap CIs
Hatched bar = calibration-chosen latent mode per architecture (no validation leakage).
latent drift
latent variance
latent OR
ReaLM-sim
GRIP-sim
random
n=40
n=34
0.4
0.3
0.2
0.1
0.0
−0.1
−0.2
−0.3
Δfrac (mean first-fire fraction: correct − incorrect; positive = fires earlier on incorrect)
Phi-4-mini
(dense GQA)
Gemma-4-26B-A4B
(sliding-window MoE)
Qwen3.6-35B-A3B
(hybrid Gated DeltaNet MoE)