


# SMD Monolithic Crystal Filters

## DSF753S 4POLE (SBF TYPE)

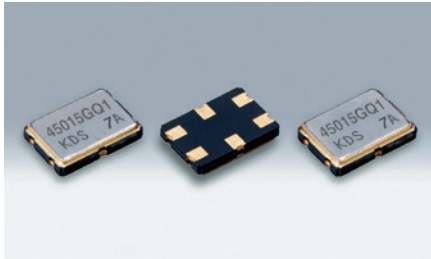

### ■ Features

- 7.0×5.0×1.3mm, lightweight (0.15g) and miniature SMD crystal filter.
- 4 pole function in a single package.
- Excellent shock and vibration resistance.

### ■ Applications

- Radio communications



Pb-Free



RoHS Compliant

### ■ Standard Specification

Actual size

| Type                        | DSF753SBF           |                  |                    |                    |                    |
|-----------------------------|---------------------|------------------|--------------------|--------------------|--------------------|
| Model                       | D38807GQ            | D45015GQ         | D49915GQ           | D51610GQ           | D55008GQ           |
| Pole                        | 4                   | 4                | 4                  | 4                  | 4                  |
| Overtone Order              | Fundamental         | Fundamental      | Fundamental        | Fundamental        | Fundamental        |
| Nominal Frequency           | 38.850 MHz          | 45.000 MHz       | 49.950 MHz         | 51.650 MHz         | 55.025 MHz         |
| Pass Bandwidth              | ±3.75kHz min./3dB   | ±7.5kHz min./3dB | ±7.5kHz min./3dB   | ±5kHz min./3dB     | ±4kHz min./3dB     |
| Stop Bandwidth              | ±15kHz max./35dB    | ±22kHz max./25dB | ±25kHz max./35dB   | ±22kHz max./30dB   | ±12.5kHz max./25dB |
| Ripple                      | 1dB max.            | 1dB max.         | 1dB max.           | 1dB max.           | 1dB max.           |
| Insertion Loss              | 4dB max.            | 4dB max.         | 4dB max.           | 4dB max.           | 6dB max.           |
| Guaranteed Attenuation      | 80dB min.           | 80dB min.        | 80dB min.          | 80dB min.          | 80dB min.          |
| Terminating Impedance       | 560Ω/5pF Cc=13pF    | 600Ω/2pF Cc=10pF | 400Ω/4.5pF Cc=14pF | 400Ω/2.5pF Cc=18pF | 200Ω/5pF Cc=24pF   |
| Operating Temperature Range | -20~+70°C           |                  |                    |                    |                    |
| Packing Unit                | 1000pcs./reel(φ180) |                  |                    |                    |                    |


Consult our sales representative for other specifications.

### ■ DSF753S


[mm]

### ■ Characteristics Chart (fo=45MHz, P=±7.5kHz)

#### ■ Dimensions

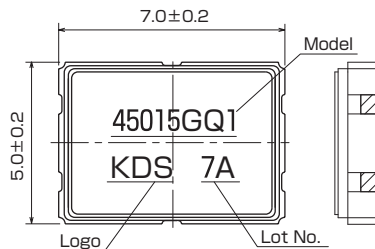


| Pin No. | Connection      |
|---------|-----------------|
| #1      | Input           |
| #2      | GND.            |
| #3      | Connect with #6 |
| #4      | Output          |
| #5      | GND.            |
| #6      | Connect with #3 |



#### ■ Recommended Land Pattern

(Top View)



#### ■ Measurement Circuit

