# Sandisolar-Aohai-AO-6KSL-G3-Home-Assistant-integration

Public

Watch 0 Fork 1 Starred 4

main 1 Branch 0 Tags Go to file Add file Code

bootuz-dinamon Enhance README with video link and thumbnail 2243064 · last month 14 Commits

| | | |
|---|---|---|
| Modbus RTU Protocol V2.14-1.zip | Add files via upload | last month |
| README.md | Enhance README with video link and thumbnail | last month |
| SD-PRO-EU-6_8.webp | Add files via upload | last month |
| Sensor1.jpg | Add files via upload | last month |
| Sensor2.jpg | Add files via upload | last month |
| Sensor3.jpg | Add files via upload | last month |
| Setting1.jpg | Add files via upload | last month |
| Setting2.jpg | Add files via upload | last month |
| Setting3.jpg | Add files via upload | last month |
| rj45.jpg | Add files via upload | last month |
| sandisolar.yml | Update inverter modbus_controller configuration | last month |

## About

Sandisolar Aohai AO-6KSL-G3 Home Assistant integration via RS-485 using esphome.

Readme
Activity
4 stars
0 watching
1 fork
Report repository

## Releases

No releases published

## Packages

No packages published

## Contributors 1

bootuz-dinamon

README

# Sandisolar Aohai AO-6KSL-G3 Home Assistant integration

Sandisolar Aohai AO-6KSL-G3 Home Assistant integration via RS-485 using esphome.




Джерело: https://bootuse.com/forum/viewtopic.php?p=25#p25

Якщо ви вже налагодили зв'язок з акумулятором через інтерфейс CAN, то у вас все одно залишається вільний канал RS485. Його можна використовувати для інтеграції з системою Home Assistant.


Сонячний інвертор для роботи поза мережею Sandisolar 6,5 кВт – https://s.click.aliexpress.com/e/_c3pTJSjF

Номінальна потужність інвертора становить 6000 Вт.

Вам знадобиться адаптер типу RS485-TTL та мікроконтролер моделі ESP32 (я використовую модель ESP32C6, але можна використовувати будь-яку іншу модель цього типу). Напруга живлення адаптера – 5 В. Для підключення до інвертора необхідно використовувати лише лінії A та B (без лінії GND).


- RS485-TTL – https://s.click.aliexpress.com/e/_c3yN9U9d
- esp32c6 – https://s.click.aliexpress.com/e/_c3HYdofD

Характеристики роз'єму RJ45 моделі Sandisolar Aohai AO-6KSL-G3: контакти BAT_NTC та GND. На ці контакти можна під'єднати датчик NTC з опором 10 кОм для вимірювання температури батареї. Якщо вам це не потрібно, просто відключіть сенсор „Temp External NTC".



| | | | |
|---|---|---|---|
| 1 | 485-B | 5 | CANL |
| 2 | 485-A | 6 | NC |
| 3 | GND | 7 | GND |
| 4 | CANH | 8 | BAT_NTC |

Сенсори:

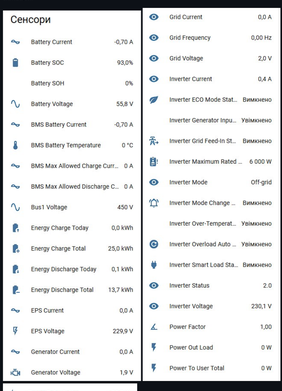


Налаштування:

