


Standard Model of Tube in Tube condenser

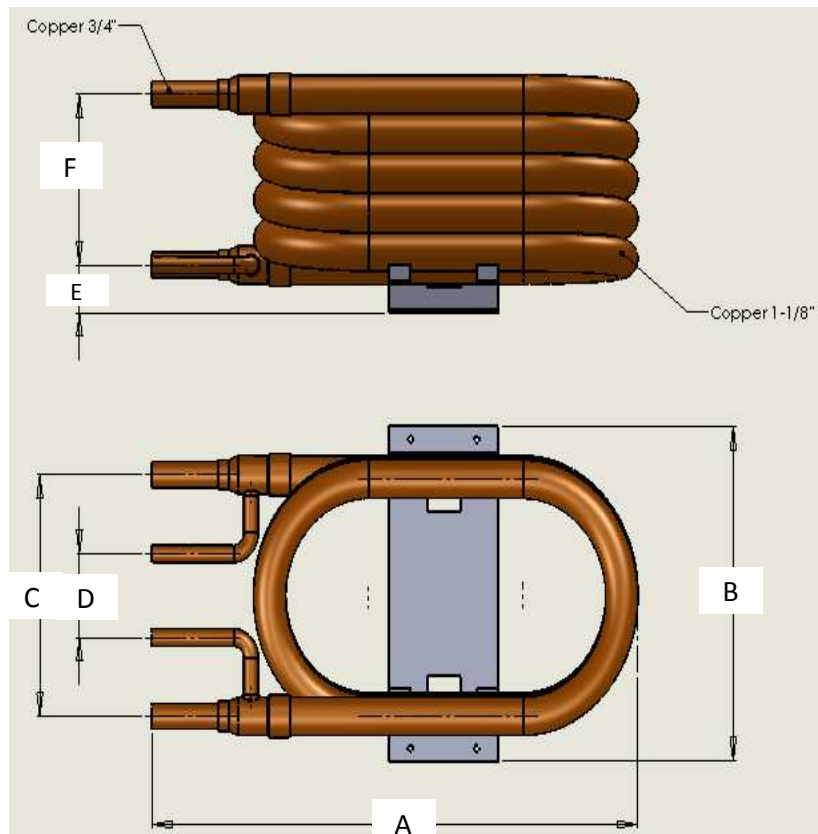

Material

- 1) CU
- 2) CU-NI

MODEL	Body Shape	BTU	A	B	C	D	E	F	Refrig. In	Refrig. Out	Water Conn.	Water Flow
			(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(litre/min.)
TTC 507-512	Trombone	7,000 - 12,000	442	255	184	64	36	45	9.53	12.7	19	11
TTC 518-524	Trombone	18,000 - 24,000	442	255	184	64	36	75	9.53	12.7	19	20
TTC 530-536	Trombone	30,000 - 36,000	442	255	184	64	36	130	12.7	12.7	19	28
TTC 548-560	Trombone	48,000 - 60,000	442	255	184	64	36	195	12.7	15.88	19	50

Water Resistance < 7 PSI

EPOXY PAINT COATING BLACK COLOR

NITROGEN HOLDING GAS 15-20 PSI

Test condition water temp outlet/inlet temp 28° C / 26° C , evap temp 2° C , Condenser temp 40° C