WEIGHT-ALTITUDE-TEMPERATURE

EAPS NOT INSTALLED
Cat.A NR=102%
Cat.B NR=100%



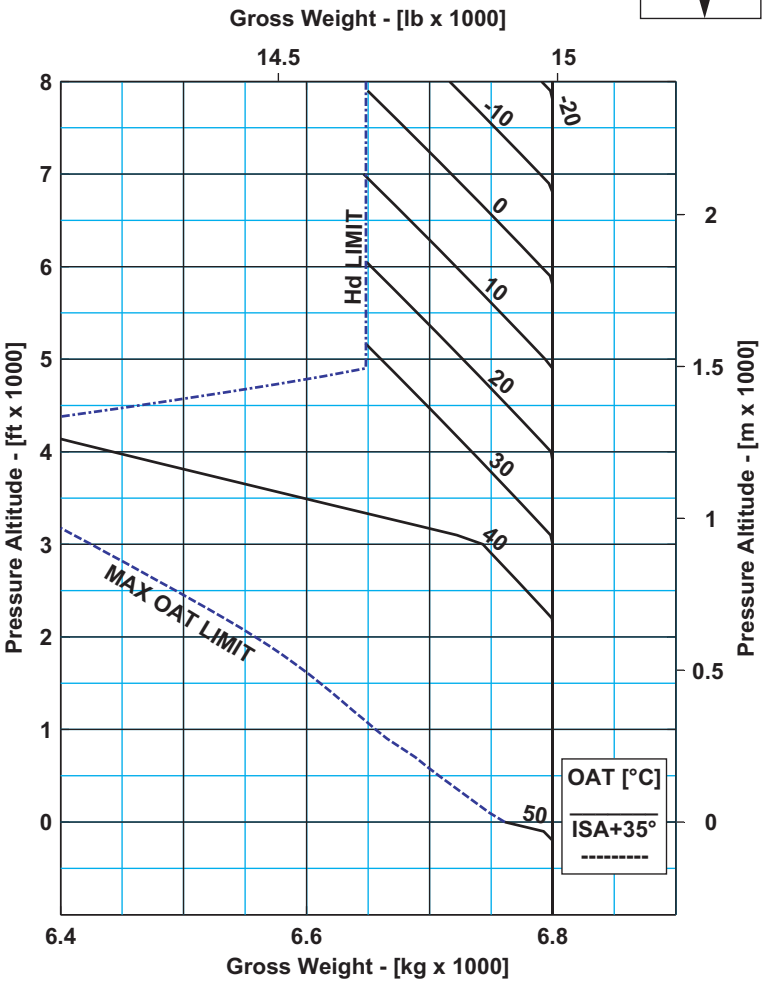

139G1580A006 issue C

ICN-39-A-155050-A-A0126-10007-A-03-1

Figure 4-1 Weight Limitations for CAT A Clear Area and CAT B Procedures

WEIGHT-ALTITUDE-TEMPERATURE

EAPS OFF
Cat.A NR=102%
Cat.B NR=100%

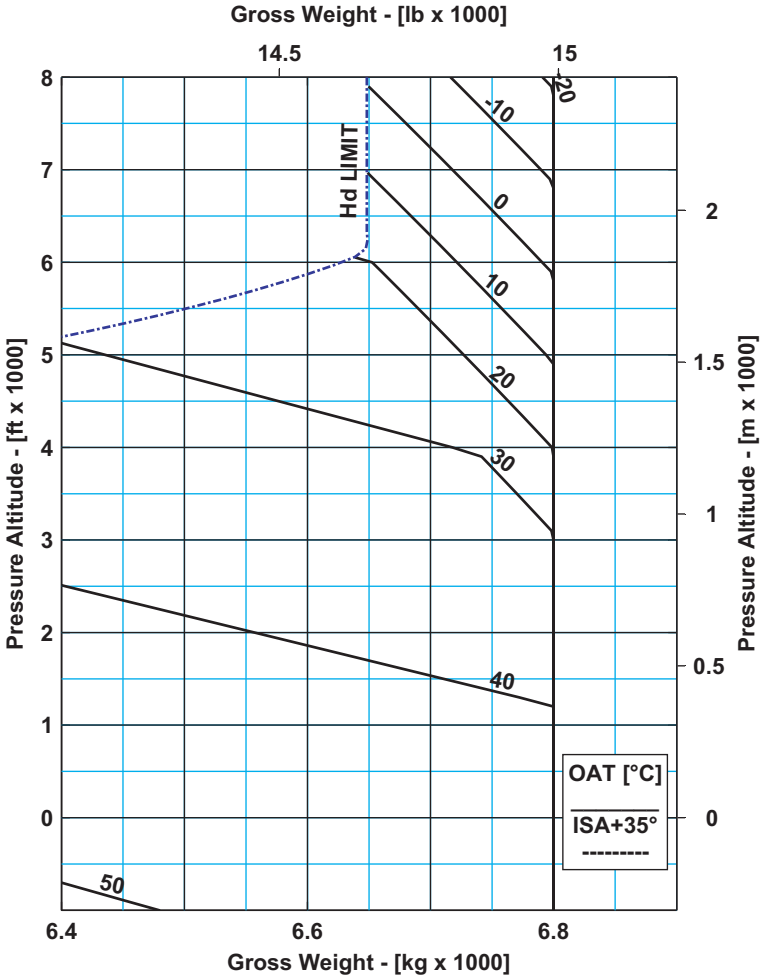

139G1580A006 issue C

ICN-39-A-155050-A-A0126-10008-A-03-1

Figure 4-2 Weight Limitations for CAT A Clear Area and CAT B Procedures, EAPS OFF

WEIGHT-ALTITUDE-TEMPERATURE

EAPS ON
Cat.A NR=102%
Cat.B NR=100%

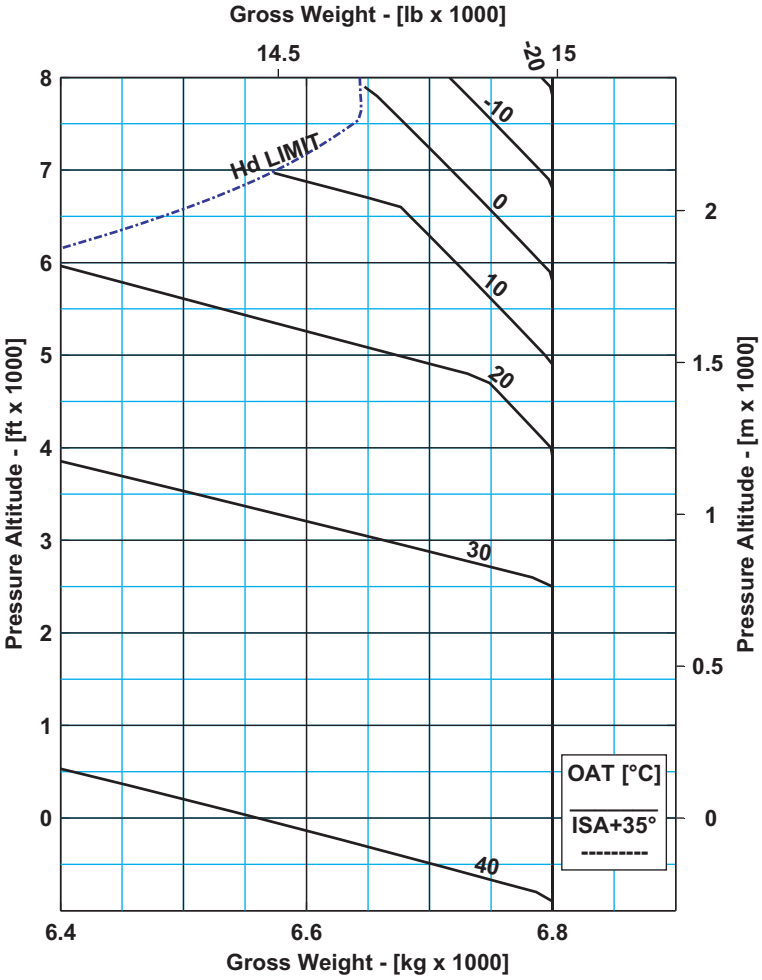

139G1580A006 issue C

ICN-39-A-155050-A-A0126-10009-A-03-1

Figure 4-3 Weight Limitations for CAT A Clear Area and CAT B Procedure, EAPS ON

WEIGHT-ALTITUDE-TEMPERATURE CONFINED AREA

ROTOR SPEED 102%

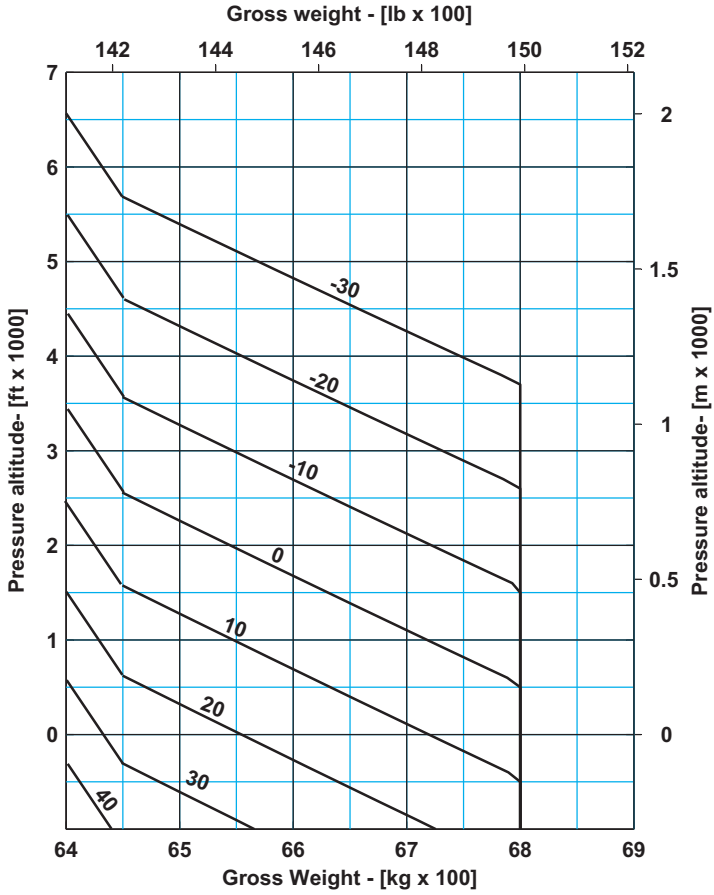

139G1580A012 issue A

ICN-39-A-155050-G-A0126-10014-A-01-1

Figure 4-4 Weight Limitations for CAT A Confined Area Procedure

WEIGHT-ALTITUDE-TEMPERATURE
CONFINED AREA

EAPS OFF
ROTOR SPEED 102%

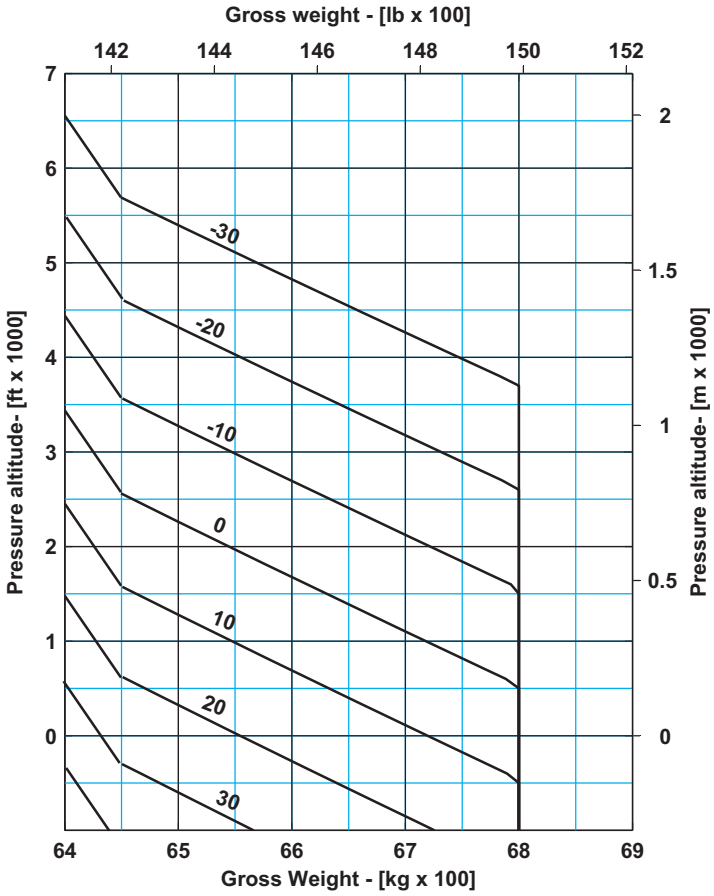

139G1580A012 issue A

ICN-39-A-155050-G-A0126-10015-A-01-1

Figure 4-5 Weight Limitations for CAT A Confined Area Procedure, EAPS OFF

WEIGHT-ALTITUDE-TEMPERATURE
CONFINED AREA

EAPS ON
ROTOR SPEED 102%

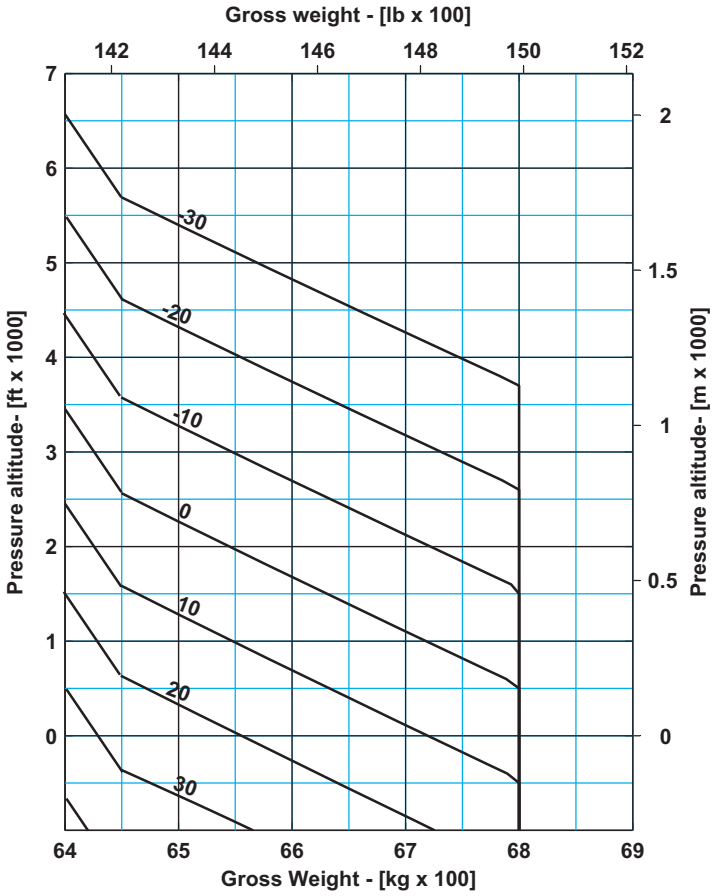

139G1580A012 issue A

ICN-39-A-155050-G-A0126-10016-A-01-1

Figure 4-6 Weight Limitations for CAT A Confined Area Procedure, EAPS ON

WEIGHT-ALTITUDE-TEMPERATURE OFF-SHORE HELIDECK PROCEDURE



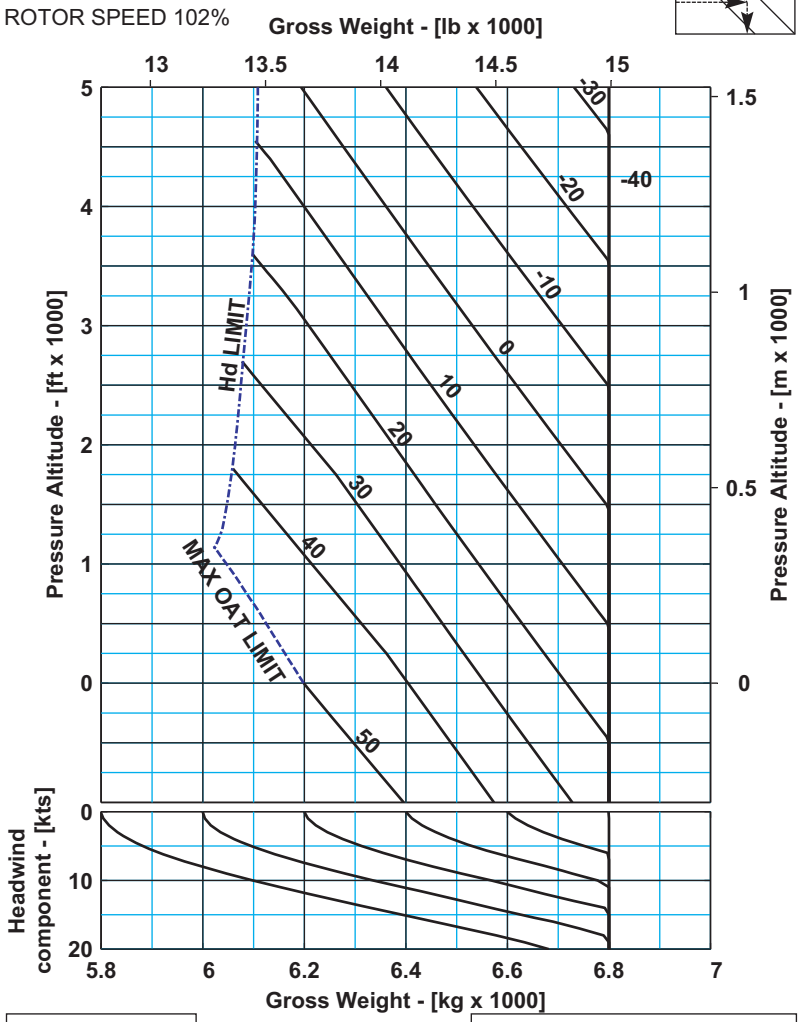

139G1580A014 issue A

ICN-39-A-159200-G-A0126-00001-A-02-1

Figure 4-7 Weight Limitations for CAT A Offshore Helideck Procedure

WEIGHT-ALTITUDE-TEMPERATURE
OFF-SHORE HELIDECK PROCEDURE

EAPS OFF

ROTOR SPEED 102%

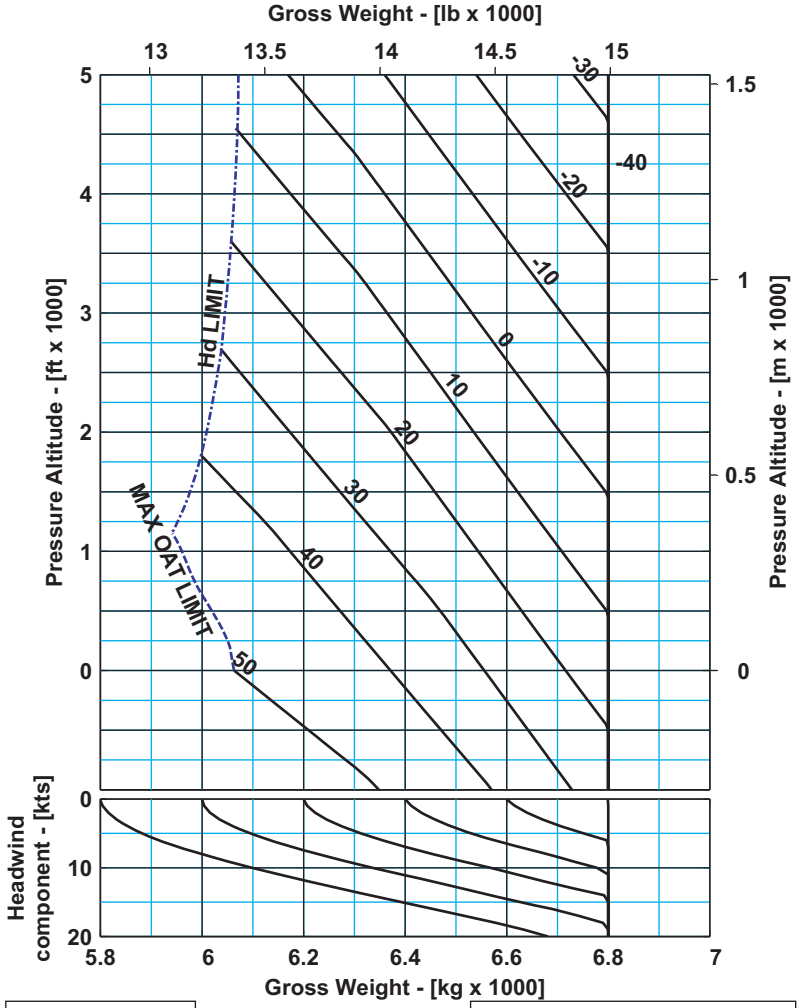

139G1580A014 issue A

ICN-39-A-159200-G-A0126-00002-A-02-1

Figure 4-8 Weight Limitations for CAT A Offshore Helideck Procedure

WEIGHT-ALTITUDE-TEMPERATURE
OFF-SHORE HELIDECK PROCEDURE

EAPS ON

ROTOR SPEED 102%

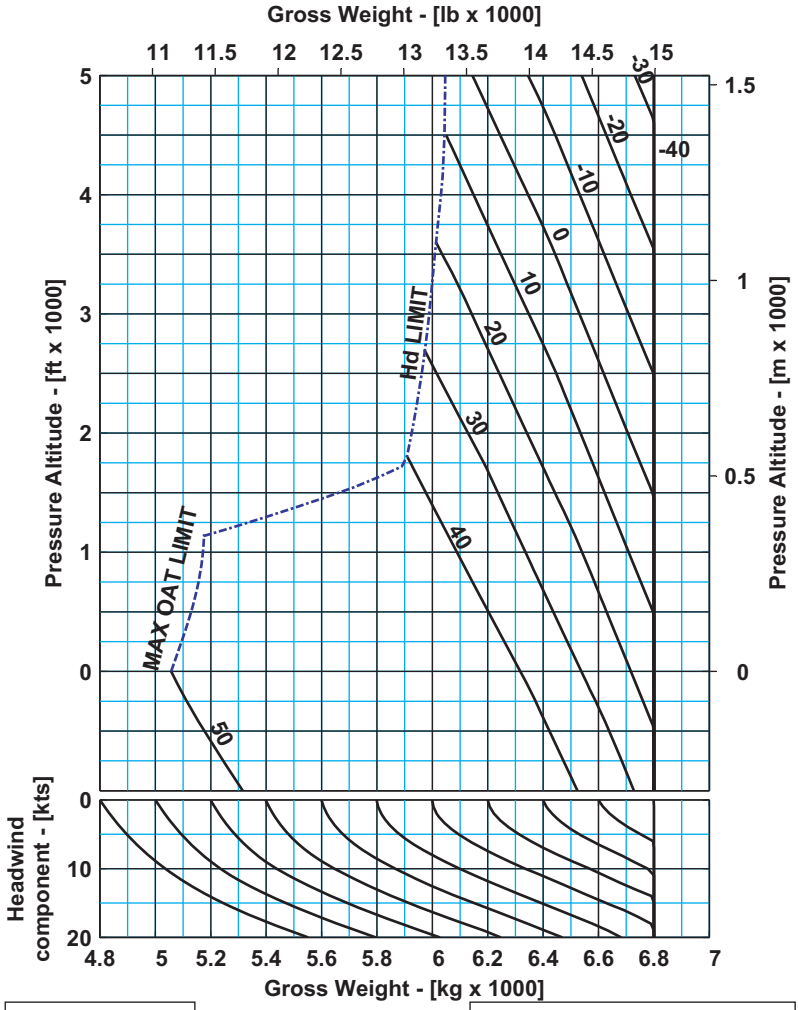

139G1580A014 issue A

ICN-39-A-159200-G-A0126-00003-A-02-1

Figure 4-9 Weight Limitations for CAT A Offshore Helideck Procedure, EAPS ON

WEIGHT-ALTITUDE-TEMPERATURE

IBF INSTALLED
Cat.A NR=102%
Cat.B NR=100%

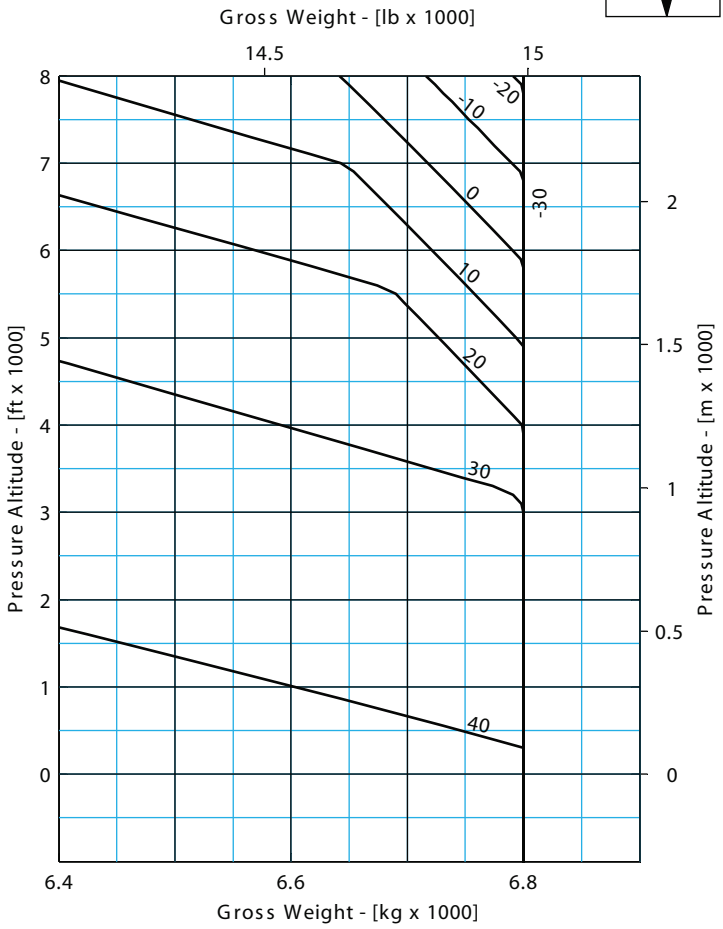

139G1580A021 issue A

ICN-39-A-155250-G-A0126-00001-A-01-1

Figure 4-9A Weight Limitations for CAT A Clear Area and CAT B Procedure, IBF Installed

WEIGHT-ALTITUDE-TEMPERATURE
CONFINED AREA

IBF INSTALLED
ROTOR SPEED 102%

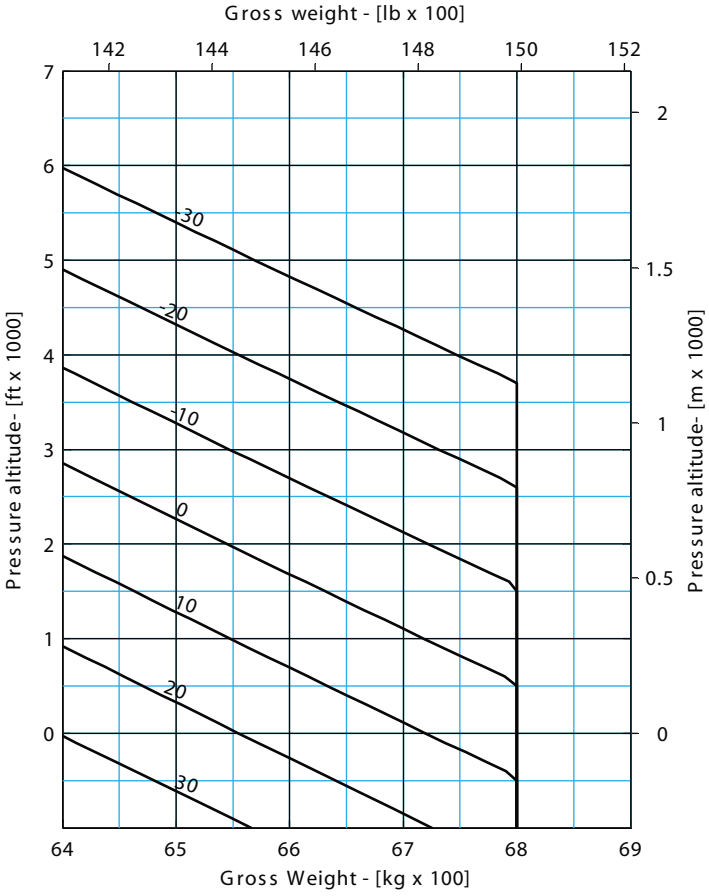

139G1580A021 issue A

ICN-39-A-155250-G-A0126-00002-A-01-1

Figure 4-9B Weight Limitations for CAT A Confined Area Procedure, IBF Installed

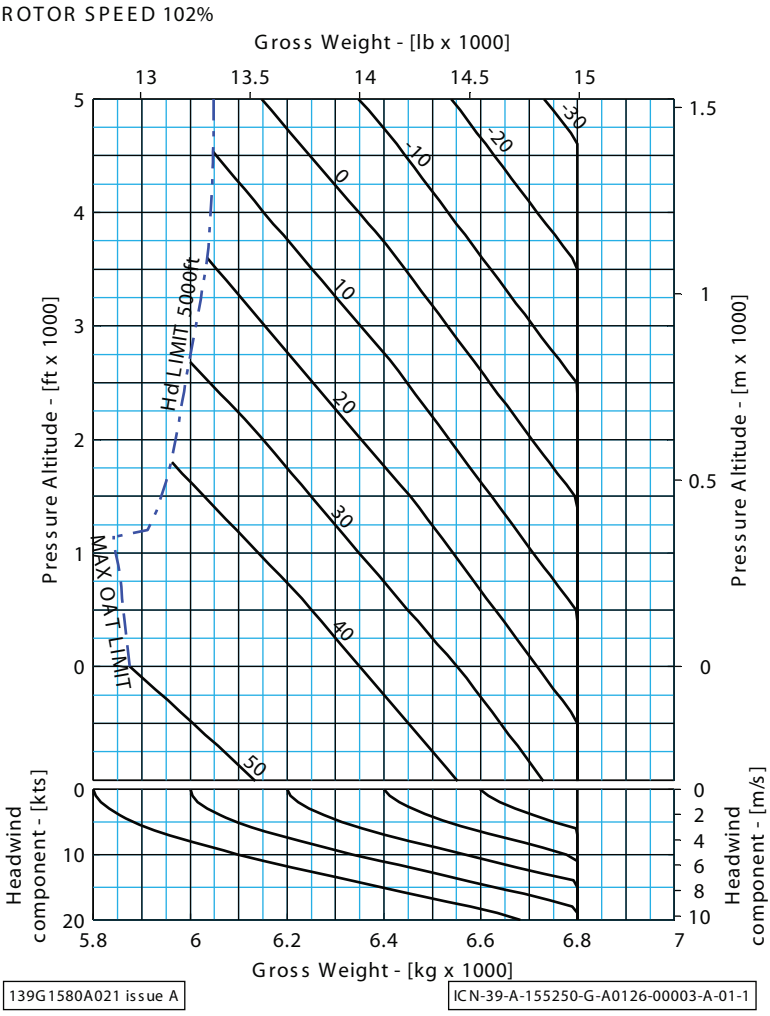

Figure 4-9C Weight Limitations for CAT A Offshore Helideck Procedure, IBF Installed