




Sensors

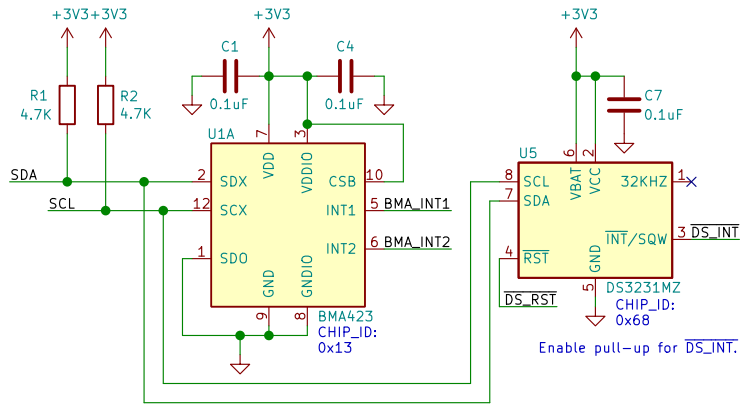


USB-Serial

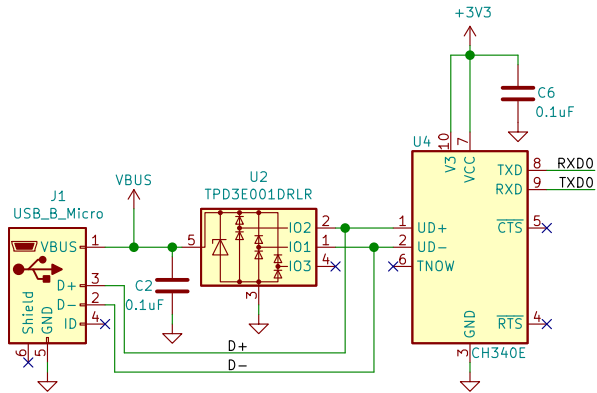


Voltage Regulation

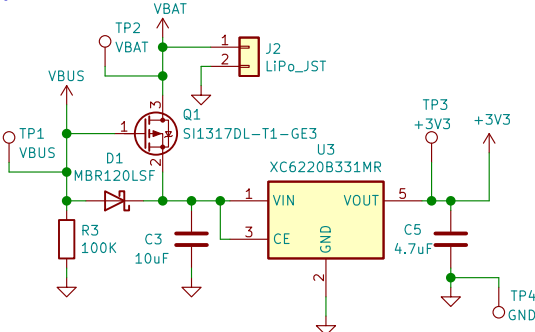

LiPo Charger

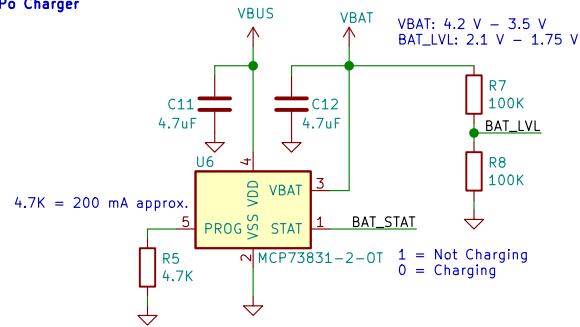


ESP32-PICO-D4

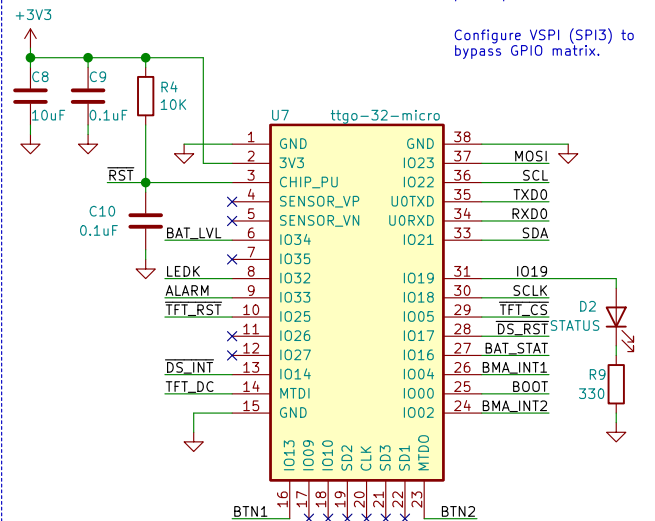


Internal SPI flash uses pins 17-22 (GPIO6-11).
Leave disconnected.


Buzzer

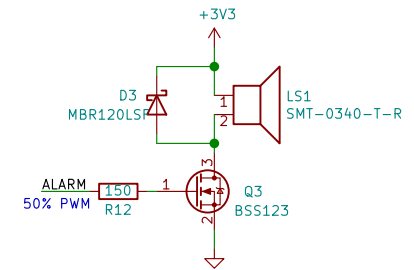

Buttons

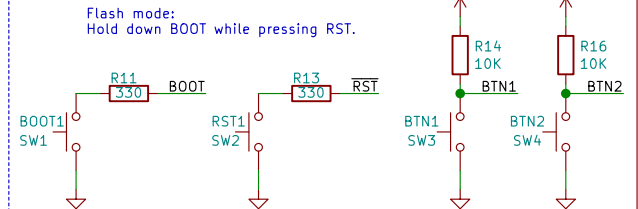

Display

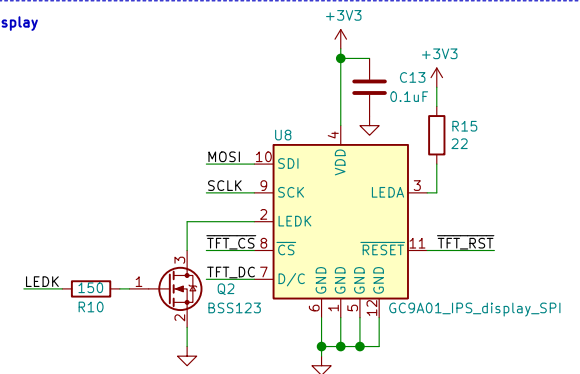

LEDK turns backlight on/off.