

Lab 1 Report

Timothy Dee, Brent Barth

October 9, 2015

Abstract

This report contains a description and analysis of the findings during Lab 1 of CprE 458, Real Time Systems. Contained herein is all relevant program code, and the results from having run this code.

1 Introduction

This paper has sections discussing program code, energy consumption data analysis, and analysis of computation time. Each of these sections discuss design decisions and why those decisions were made. TODO

2 Part 1 - Code

2.1 High Performance Mode

Listing 1 describes our implementation of high performance mode. This code was straightforward due to its similarity with low performance mode.

2.2 Dynamic Frequency Scaling Mode I

Listing 2 describes our implementation of dynamic frequency scaling mode I. This mode varies the frequency range according to the CPU load. Lower processor frequencies will conserve power while higher processor frequencies will allow for increased performance. Certain CPU loads require that the processor be set to high performance mode or low performance mode. To accomplish this we use the `performClick()` method attached to the low performance mode and high performance mode buttons. This has the same effect as the user pressing the button which corresponds to these modes.

2.3 Dynamic Frequency Scaling Mode II

Listings 3 and 4 show our implementation of dynamic frequency scaling mode 2. For this mode we thought about the phone states which affect the scarcity of power. We determined that the wireless radio state and the charging state of

the phone were significant enough to be determining factors in how we choose to manage the processor frequency.

In the case of the wireless radio the following train of logic was applied. If the wireless radio is on, then we are likely to be interacting with a web page. If we are interacting with a web page then we will certainly benefit from a more responsive device. Therefore we elect to put the phone in a higher power state while the wireless radio is on. We save energy by setting the phone in a lower power state when the wireless radio is off. The decision making for the charging state is straightforward. If the phone is charging then we don't need to worry about power consumption, even if the battery is low.

2.4 Dynamic Frequency Scaling Mode Mixed

Listing 5 shows our implementation of dynamic frequency scaling mode mixed. For this mode we choose to use the charging state, battery charge percent, and cpu load as determining factors in our algorithm. All of these factors have a significant impact on how much we care about our energy usage. In many cases we are willing to sacrifice energy in exchange for performance.

As discussed previously, the charging state impacts our decisions in a straightforward way. If the device is being charged then we do not have to worry about power consumption, and we can activate high performance mode. When the device is not charging set a frequency range as a function of charge percent and cpu load. We set load fraction to be an integer ranging between 0 and 12 depending on the cpu load. A load fraction of 0.0 yields 100000 Khz processor frequency while a load fraction of 12 yields 1300000 Khz processor frequency. load fraction increases linearly with cpu load and decreases linearly with battery percent. battery percent causes the program to pretend like the cpu load is smaller than reality.

2.5 Measuring Computation Time

Listing 6 depicts the code we used to measure computation time under each of the different modes. TODO

Listing 1: High Performance Mode

```
1 PMbutton2.setOnClickListener(new View.OnClickListener() {
2
3     @Override
4     public void onClick(View v) {
5
6         OPERATIONmessage("[High Performance Mode]
7         #####");
8         //TODO Please program for High Performance Mode here (done)
9
10        DATAname = "1300000"; // Setting up the minimum frequency 1300 Mhz
11        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
12        ChangeCPUinfor(CPUname, DATAname, DATAaddress);
13        DATAname = "1300000"; // Setting up the maximum frequency at 1300 MHz
14        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
15        ChangeCPUinfor(CPUname, DATAname, DATAaddress);
16
17        CPUname = "High Power";
18        DATAname = "current min frequency";
19        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
20        ReadCPUinfor(CPUname, DATAname, DATAaddress);
21        DATAname = "current MAX frequency";
22        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
23        ReadCPUinfor(CPUname, DATAname, DATAaddress);
24
25        OPERATIONmessage("[High Performance Mode]
26        #####");
27    }
28 });
```

Listing 2: Dynamic Frequency Scaling Mode I

```
1 private void setDFS_1(double cpu_load){
2     // determine if I should go to a power mode
3     if(cpu_load < .2){
4         // go to low performance mode
5         PMbutton1.performClick();
6     }else if(cpu_load > .9){
7         //go to high performance mode
8         PMbutton2.performClick();
9     }else{
10        // set the frequency range between 51 Mhz and 1.3 Ghz
11        DATAname = "51000"; // Setting up the minimum frequency 51 Mhz
12        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
13        ChangeCPUinfor(CPUname, DATAname, DATAaddress);
14        DATAname = "1300000"; // Setting up the maximum frequency at 1300 MHz
15        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
16        ChangeCPUinfor(CPUname, DATAname, DATAaddress);
17
18        CPUname = "Dynamic Mode";
19        DATAname = "current min frequency";
20        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
21        ReadCPUinfor(CPUname, DATAname, DATAaddress);
22        DATAname = "current MAX frequency";
23        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
24        ReadCPUinfor(CPUname, DATAname, DATAaddress);
25    }
26 }
```

Listing 3: Dynamic Frequency Scaling Mode II

```
1 private void setDFS_2(){
2     // get the battery level
3     IntentFilter ifilter = new IntentFilter(Intent.ACTION_BATTERY_CHANGED);
4     Intent batteryStatus = this.registerReceiver(null, ifilter);
5
6     int level = batteryStatus.getIntExtra(BatteryManager.EXTRA_LEVEL, -1);
7     int scale = batteryStatus.getIntExtra(BatteryManager.EXTRA_SCALE, -1);
8
9     float battery_percent = level / (float)scale;
10
11    // get the wireless radio state
12    ConnectivityManager connectivityManager = (ConnectivityManager)
13        this.getSystemService(Context.CONNECTIVITY_SERVICE);
14
15    NetworkInfo network_info = connectivityManager.getActiveNetworkInfo();
16    boolean is_wireless_on = (network_info != null);
17
18    // get the charging state
19    int status = batteryStatus.getIntExtra(BatteryManager.EXTRA_STATUS, -1);
20    boolean is_charging = status == BatteryManager.BATTERY_STATUS_CHARGING ||
21        status == BatteryManager.BATTERY_STATUS_FULL;
22
23    //(continued on next page)
```

Listing 4: Dynamic Frequency Scaling Mode II (continued)

```
1 // determine if we are charging
2 if(is_charging){
3     // if we are charging we don't care about power usage.... set to high performance
4     mode
5     PMbutton2.performClick();
6 }else if(battery_percent < .3) {
7     // we want to conserve energy because we are almost out of it, set to low
8     performance mode
9     PMbutton1.performClick();
10 }else{
11     // if we're not charging and not low battery we have some decisions to make
12     // if the wireless radio is on we are likely doing something online.
13     // If we are doing something we will like a more responsive device
14     // so allow the processor to vary between two fairly high frequency states
15     if (is_wireless_on) {
16         // set to fairly high processing state
17         // set the frequency range between 700 Mhz and 1.3 Ghz
18         DATAname = "700000"; // Setting up the minimum frequency 51 Mhz
19         DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
20         ChangeCPUinfor(CPUname, DATAname, DATAaddress);
21         DATAname = "1300000"; // Setting up the maximum frequency at 1300 MHz
22         DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
23         ChangeCPUinfor(CPUname, DATAname, DATAaddress);
24
25         CPUname = "Dynamic Mode";
26         DATAname = "current min frequency";
27         DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
28         ReadCPUinfor(CPUname, DATAname, DATAaddress);
29         DATAname = "current MAX frequency";
30         DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
31         ReadCPUinfor(CPUname, DATAname, DATAaddress);
32     } else {
33         // set to lower processing state
34         // set the frequency range between 51 Mhz and 700 Mhz
35         DATAname = "51000"; // Setting up the minimum frequency 51 Mhz
36         DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
37         ChangeCPUinfor(CPUname, DATAname, DATAaddress);
38         DATAname = "700000"; // Setting up the maximum frequency at 1300 MHz
39         DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
40         ChangeCPUinfor(CPUname, DATAname, DATAaddress);
41
42         CPUname = "Dynamic Mode";
43         DATAname = "current min frequency";
44         DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
45         ReadCPUinfor(CPUname, DATAname, DATAaddress);
46         DATAname = "current MAX frequency";
47         DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
48         ReadCPUinfor(CPUname, DATAname, DATAaddress);
49     }
50 }
```

Listing 5: Dynamic Frequency Scaling Mode Mixed

```
1 private void setDFS_Mixed(double cpu_load) {
2     // get the battery level
3     IntentFilter ifilter = new IntentFilter(Intent.ACTION_BATTERY_CHANGED);
4     Intent batteryStatus = this.registerReceiver(null, ifilter);
5
6     int level = batteryStatus.getIntExtra(BatteryManager.EXTRA_LEVEL, -1);
7     int scale = batteryStatus.getIntExtra(BatteryManager.EXTRA_SCALE, -1);
8
9     float battery_percent = level / (float)scale;
10
11    // get the charging state
12    int status = batteryStatus.getIntExtra(BatteryManager.EXTRA_STATUS, -1);
13    boolean is_charging = status == BatteryManager.BATTERY_STATUS_CHARGING ||
14        status == BatteryManager.BATTERY_STATUS_FULL;
15
16    // determine if we are charging
17    if(is_charging){
18        // if we are charging we don't care about power usage.... set to high performance
19        // mode
20        PMbutton2.performClick();
21    }else {
22        // vary the processor frequency based on the battery level.
23        // the higher the battery level, the higher the frequency.
24        // anywhere from 100000 khz to 1300000 khz
25        double step_size = 1.0/12.0;
26
27        // pretend like the cpu_load is less if the battery percent is lower
28        int load_fraction = new Double(Math.ceil( (cpu_load * battery_percent) /
29            step_size)).intValue();
30
31        // load_fraction is at greatest 1
32        int high_frequency = 100000 * (Integer.valueOf(load_fraction) + 1);
33        int low_frequency = high_frequency;
34
35        // set to fairly high processing state
36        DATAname = String.valueOf(low_frequency); // Setting up the minimum frequency at low
37        // frequency
38        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
39        ChangeCPUinfor(CPUname, DATAname, DATAaddress);
40        DATAname = String.valueOf(high_frequency); // Setting up the maximum frequency at
41        // high frequency
42        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
43        ChangeCPUinfor(CPUname, DATAname, DATAaddress);
44
45        CPUname = "Dynamic Mode";
46        DATAname = "current min frequency";
47        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_min_freq";
48        ReadCPUinfor(CPUname, DATAname, DATAaddress);
49        DATAname = "current MAX frequency";
50        DATAaddress = "/sys/devices/system/cpu/cpu0/cpufreq/scaling_max_freq";
51        ReadCPUinfor(CPUname, DATAname, DATAaddress);
52    }
53 }
```

//TODO

3 Part 2 - Data Analysis

3.1 Measuring energy consumption

TODO

3.2 Comparison and Analysis

TODO

4 Extra Part - Measuring Computation Time

TODO

5 Conclusion

TODO

$$\begin{aligned} \frac{V_{out} - V_-}{R2} - \frac{V_- - V_{in}}{R1} &= 0 \\ R1(V_{out} - V_-) &= R2(V_- - V_{in}) \\ V_{out} &= \frac{R1V_- + R2V_- - R2V_{in}}{R1} \\ V_- &= 0 \\ V_{out} &= \frac{-V_{in}R2}{R1} \\ \frac{V_{out}}{V_{in}} &= \frac{-R2}{R1} \end{aligned} \tag{1}$$

$$\frac{V_{out}}{V_{in}} = \frac{47000}{47} = 1000$$

Equation 1 demonstrates example equation.

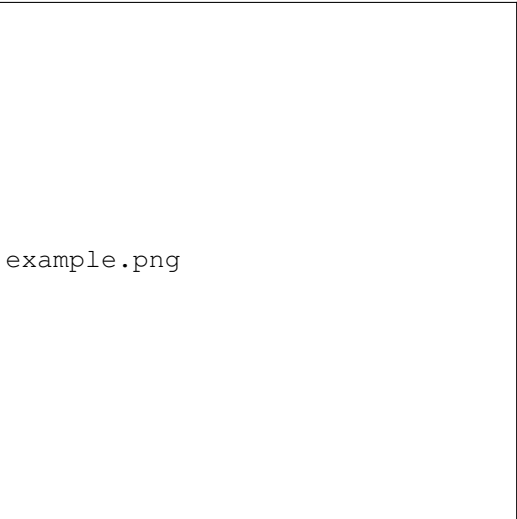


Figure 1: IR-Transmitter