Chapter 5. Statistical Inference

Estimation and hypothesis testing

Contents

5.1 Estimation **2**

5.1.1 Estimating a population mean 2

5.1.2 Parameters, point and interval estimation 3

5.2 Significance tests and hypothesis tests **4**

5.2.1 Null and alternative hypotheses 4

5.2.2 The P-value 5

5.2.3 Significance level 6

5.2.4 Tests for μ with σ known 6

5.2.5 Rejection regions and hypothesis testing 7

5.2.6 Two kinds of error 9

5.1 Estimation

Motivation. Inference attaches a probability-based reliability to conclusions; estimation is explained through the mean.

Computing an estimate of a population characteristic (mean, s.d., proportion, correlation) *with its margin of error* is **estimation**.

5.1.1 Estimating a population mean

Illustration 5-1: tire lifetimes

A new tire process should raise the mean life μ, with $\sigma = 5000$ km unchanged. $n = 100$ tires give $\bar{x} = 38000$ km, so $\hat{\mu} = \bar{x} = 38000$ km.

How reliable is this method? By the CLT, $\bar{X}$ is approximately $N(\mu, \sigma^2/100)$ with standard deviation $\sigma/\sqrt{n} = 5000/10 = 500$ km. Hence

(a) with probability about 0.95, $\bar{X}$ lies within $1.96\,\sigma/\sqrt{n} = 980$ of μ;

(b) the event $|\bar{X} - \mu| < 980$ is the same as $\mu \in (\bar{X} - 980, \bar{X} + 980)$;

(c) if the experiment were repeated indefinitely, about 95% of the intervals $(\bar{x} - 980, \bar{x} + 980)$ would contain μ.

Here the interval is $(37020, 38980)$. Either it contains μ, or the sample is among the unusual 5%; the *method* is right 95 times in 100, so $37020 < \mu < 38980$ is a 95% **confidence interval** (**confidence level** 95%): $\hat{\mu} = 38000$, $|\mu - \hat{\mu}| \le 1.96\,\sigma/\sqrt{n} = 980$.

Definition (Estimate, estimator, standard error)

$\hat{\mu} = \bar{x}$ is an **estimate**, $1.96\,\sigma/\sqrt{n}$ its 95% **margin of error**; the statistic $\hat{\mu} = \bar{X}$ is the **estimator** (as a random variable to its observed value). The standard deviation of an estimator is its **standard error**:

$$\mathrm{SE}(\hat{\mu}) = \sqrt{\mathrm{Var}(\hat{\mu})} = \sqrt{\mathrm{Var}(\bar{X})} = \frac{\sigma}{\sqrt{n}}.$$

For large n,

$$P\Big(-z_{\alpha/2} \le \frac{\bar{X} - \mu}{\sigma/\sqrt{n}} \le z_{\alpha/2}\Big) \approx P(-z_{\alpha/2} \le Z \le z_{\alpha/2}) = 1 - \alpha.$$

Definition (Estimating μ when σ is known)

(a) Estimator and standard error: $\hat{\mu} = \bar{X}$, $\mathrm{SE}(\hat{\mu}) = \sigma/\sqrt{n}$.
(b) $100(1-\alpha)\%$ margin of error: $z_{\alpha/2}\,\mathrm{SE}(\hat{\mu}) = z_{\alpha/2}\,\sigma/\sqrt{n}$.
(c) $100(1-\alpha)\%$ confidence interval: $\Big(\bar{x} - z_{\alpha/2}\dfrac{\sigma}{\sqrt{n}},\ \bar{x} + z_{\alpha/2}\dfrac{\sigma}{\sqrt{n}}\Big)$.

These statements are exact for a normal population and approximate (large n) otherwise. Common confidence levels are 90%, 95%, 99%, with $z_{0.05} = 1.645$, $z_{0.025} = 1.96$, $z_{0.005} = 2.576$.

Illustration 5-2

From a normal population with $\sigma = 10$, a sample of $n = 25$ gives $\bar{x} = 40$. Then $\hat{\mu} = 40$, the 90% margin of error is $1.645 \cdot 10/\sqrt{25} = 3.29$, and the 90% confidence interval is (36.71, 43.29).

Meaning of the confidence level. In Illustration 5-2, twenty samples of size 25 give twenty intervals $\bar{x} \pm 3.29$, of which 18 contain μ in the book's simulation: 90% confidence means 90% coverage over repeated sampling.

Example 5-1 (Cholesterol of low-income residents)

A survey of $n = 49$ low-income Central American residents found mean blood cholesterol $\bar{x} = 157.02$ mg/L. Assume cholesterol is approximately normal with $\sigma = 30$ mg/L. Find a 95% confidence interval for μ.
Solution. $\bar{x} \pm 1.96\,\sigma/\sqrt{n} = 157.02 \pm 1.96 \cdot 30/7 = 157.02 \pm 8.40$, i.e. (148.62, 165.42) mg/L.

At 99% the interval is $\bar{x} \pm 2.576\,\sigma/\sqrt{n} = (145.98, 168.06)$: higher confidence gives a longer interval, and excessively high confidence makes the interval uselessly wide. The length of a $100(1-\alpha)\%$ interval is

$$\left(\bar{x} + z_{\alpha/2}\frac{\sigma}{\sqrt{n}}\right) - \left(\bar{x} - z_{\alpha/2}\frac{\sigma}{\sqrt{n}}\right) = 2z_{\alpha/2}\frac{\sigma}{\sqrt{n}},$$

twice the margin of error, so it can be controlled through n.

Definition (Sample size for estimating μ (σ known))

To make the $100(1-\alpha)\%$ margin of error at most d (interval length at most $2d$), take

$$n \geq \left(z_{\alpha/2}\frac{\sigma}{d}\right)^2.$$

(Indeed $z_{\alpha/2}\sigma/\sqrt{n} \leq d \iff \sqrt{n} \geq z_{\alpha/2}\sigma/d$.)

Example 5-2 (Required sample size)

In Example 5-1, how many residents must be surveyed for the 95% margin of error to be at most 5 mg/L?
Solution. With $\sigma = 30$, $n \geq (1.96 \cdot 30/5)^2 = 138.2976$, so at least 139 residents are needed.

5.1.2 Parameters, point and interval estimation

σ unknown is treated in Chapter 6. A numerical summary of a population is a **parameter** θ, with estimator (or estimate) $\hat{\theta}(X_1, \ldots, X_n)$, or $\hat{\theta}$.

Definition (Confidence interval for a parameter)

If statistics $L = L(X_1, \ldots, X_n)$ and $U = U(X_1, \ldots, X_n)$ satisfy

$$P(L < \theta < U) = 1 - \alpha,$$

then (L, U) is a $100(1-\alpha)\%$ confidence interval for θ. The confidence level has the same repeated-sampling meaning as before.

Illustration 5-3: estimating σ and σ^2

The usual estimator of σ is the sample standard deviation, and that of σ^2 the sample variance:

$$\hat{\sigma} = \sqrt{\frac{1}{n-1}\sum_{i=1}^{n}(X_i - \bar{X})^2} = S, \qquad \hat{\sigma}^2 = \frac{1}{n-1}\sum_{i=1}^{n}(X_i - \bar{X})^2 = S^2.$$

Giving only an estimate of the parameter is **point estimation**; giving a confidence interval is **interval estimation**. Together they constitute **estimation of parameters**.

Example 5-3 (Thickness of plastic sheets)

The variability of thickness is a key quality characteristic. Ten sheets measured (mm):

226	228	226	225	232	228	227	229	225	230

Estimate the population standard deviation σ.
Solution. $\bar{x} = \frac{1}{10}(226 + 228 + \cdots + 230) = 227.6$ mm and

$$s^2 = \frac{1}{10-1}\{(226-227.6)^2 + (228-227.6)^2 + \cdots + (230-227.6)^2\} = 5.1556,$$

so $\hat{\sigma} = s = \sqrt{5.1556} = 2.27$ mm.

Other estimators exist (e.g. the trimmed mean for μ, more stable when there are outliers), but this book uses $\bar{X}$ and S.

5.2 Significance tests and hypothesis tests

Motivation. Significance testing measures evidence against a claim by a probability, the P-value.

5.2.1 Null and alternative hypotheses

Illustration 5-4: testing Mendel's law

Genetically modified peas gave 860 round-yellow, 340 round-green, 240 wrinkled-yellow, 160 wrinkled-green in the second generation. Mendel predicts $9:3:3:1$. Do the data suggest a new theory?

Science advances by finding strong evidence against established theories. Here the claim under scrutiny is the **hypothesis** "the four types occur in ratio $9:3:3:1$".

Definition (Null and alternative hypotheses; significance test)

The hypothesis we seek evidence *against* is the **null hypothesis** H_0; its alternative is the **alternative hypothesis** H_1. A **significance test** evaluates the evidence against H_0, as in proof by contradiction: under H_0 the data would be very unlikely.

Illustration 5-5: sprinkler temperature

Sprinklers are designed to activate at 55°C. The process is abnormal if the mean activation temperature μ satisfies $\mu < 55$ or $\mu > 55$. Since we seek clear evidence of abnormality,

$$H_0 : \mu = 55, \qquad H_1 : \mu \neq 55.$$

Illustration 5-6: paint drying time

A paint dries in 75 minutes on average ($\sigma = 9.4$). An additive is claimed to shorten this and will be adopted only on clear evidence. With μ the mean drying time with the additive,

$$H_0 : \mu = 75, \qquad H_1 : \mu < 75.$$

$H_1 : \mu \neq 55$ is **two-sided**, $H_1 : \mu < 75$ **one-sided**. The claim to be established goes into H_1.

Choice of the null value

The negation of $H_1 : \mu < 75$ is $H_0 : \mu \geq 75$; stating the boundary $H_0 : \mu = 75$ (hardest to distinguish from H_1) does not change the procedure.

Evidence for H_1 is evaluated through an estimator of the parameter: the farther the estimate lies from the value specified by H_0 in the direction of H_1, the stronger the evidence.

Illustration 5-7

For $H_0 : \mu = 55$, $H_1 : \mu \neq 55$, the evidence is sought in $\bar{X}$; since H_1 is two-sided, $\bar{X}$ far from 55 in *either* direction supports H_1.

Illustration 5-8

For $H_0 : \mu = 75$, $H_1 : \mu < 75$ (left-sided), values of $\bar{X}$ far *below* 75 support H_1.

A statistic such as $\bar{X}$ used in a test is a **test statistic**.

5.2.2 The P-value

Illustration 5-9: P-value for the sprinklers

For $H_0 : \mu = 55$, $H_1 : \mu \neq 55$, $n = 9$ sprinklers gave $\bar{x} = 55.63$°C; assume normality with $\sigma = 0.9$. The observed deviation is $\bar{x} - 55 = 0.63$. The probability, under H_0, of evidence at least as strong as observed is

$$P\Big(\Big|\frac{\bar{X} - 55}{\sigma/\sqrt{n}}\Big| \geq 2.1 \;\Big|\; \mu = 55\Big) = P(|Z| \geq 2.1) = 0.0357,$$

since $0.63/(0.9/3) = 2.1$. Repeating the survey, stronger evidence against H_0 would arise fewer than 4 times in 100 if H_0 were true; the data strongly suggest $\mu \neq 55$.

Definition 5-1 (Significance probability (P-value))

The ***P*-value** is the probability under H_0 that the test statistic is at least as extreme as observed, in the direction of H_1; smaller means stronger evidence against H_0.

Illustration 5-10: P-value for the paint

For $H_0 : \mu = 75$, $H_1 : \mu < 75$, $n = 100$ samples with the additive gave $\bar{x} = 73.5$ ($\sigma = 9.4$). By the CLT, $\bar{X} \approx N(\mu, 9.4^2/100)$, so

$$P = P(\bar{X} \le 73.5 \mid \mu = 75) = P\Big(\frac{\bar{X} - 75}{9.4/\sqrt{100}} \le -1.5957 \,\Big|\, \mu = 75\Big) \approx P(Z \le -1.5957) = 0.0553.$$

The data fairly strongly suggest a shorter drying time; the strength of evidence is about 5.5%.

5.2.3 Significance level

A **significance level** α (usually 0.05 or 0.01) is often fixed in advance; $P \le 0.05$ is reported as "statistically significant ($P \le 0.05$)".

Definition 5-2 (Statistical significance)

If the P-value is at most the significance level α, the result is **statistically significant at level** α; the evidence against H_0 is stronger than the prescribed level.

Definition (Procedure of a significance test)

(a) State H_0 and H_1.
(b) [Optional] Fix the significance level α.
(c) Compute the observed value of the test statistic (based on an estimator of the relevant parameter).
(d) Compute the P-value from the sampling distribution of the test statistic under H_0; it measures the evidence against H_0.
(e) [Optional] Compare the P-value with α: if $P \le \alpha$ the result is significant.

Steps (c) and (d) are mechanical (tables or software), but H_0, H_1 and the interpretation are the investigator's responsibility.

5.2.4 Tests for μ with σ known

For $H_0 : \mu = \mu_0$ against $H_1 : \mu < \mu_0$ the standardized statistic and its observed value are

$$Z = \frac{\bar{X} - \mu_0}{\sigma/\sqrt{n}}, \qquad z = \frac{\bar{x} - \mu_0}{\sigma/\sqrt{n}},$$

and $P = P(\bar{X} \le \bar{x} \mid \mu = \mu_0) \approx P(Z \le z)$ (in Illustration 5-10, $z = -1.5957$ and $P = 0.0553$). For $H_1 : \mu > \mu_0$, $P \approx P(Z \ge z)$; for $H_1 : \mu \ne \mu_0$, deviations of $\bar{X}$ from μ_0 in both directions count, so

$$P(\bar{X} - \mu_0 \le -|\bar{x} - \mu_0| \text{ or } \bar{X} - \mu_0 \ge |\bar{x} - \mu_0| \mid \mu = \mu_0) \approx P(|Z| \ge |z|).$$

Definition (Significance test for μ (σ known))

For $H_0 : \mu = \mu_0$ use $Z = \dfrac{\bar{X} - \mu_0}{\sigma/\sqrt{n}}$. With observed value z, the P-value is
(a) $P = P(Z \ge z)$ if $H_1 : \mu > \mu_0$;
(b) $P = P(Z \le z)$ if $H_1 : \mu < \mu_0$;
(c) $P = P(|Z| \ge |z|)$ if $H_1 : \mu \ne \mu_0$.

The P-value is exact for a normal population and approximate for large n otherwise.

Example 5-4 (New tire process)

Current tires last 37,000 km on average ($\sigma = 5000$). 100 tires from a new process give $\bar{x} = 38000$ km. With σ unchanged, is the new process successful?
Solution. We want to establish $\mu > 37000$: $H_0 : \mu = 37000$, $H_1 : \mu > 37000$. The observed statistic is

$$z = \frac{38000 - 37000}{5000/\sqrt{100}} = 2.$$

Z is approximately standard normal ($n = 100$), and H_1 is right-sided, so $P = P(Z \geq 2) = 1 - 0.9772 = 0.0228$. The data strongly suggest that the new process increases tire life.

Example 5-5 (Concentration of an active ingredient)

A drug should contain 0.85 g/L of an ingredient; measurements are $N(\mu, 0.0123^2)$. Three measurements by a new method average $\bar{x} = 0.8404$ g/L. Is $\mu \neq 0.85$?
Solution. $H_0 : \mu = 0.85$, $H_1 : \mu \neq 0.85$, and

$$z = \frac{0.8404 - 0.85}{0.0123/\sqrt{3}} = -1.35.$$

The population is normal, so $Z \sim N(0,1)$ exactly, and $P = P(|Z| \geq 1.35) = 2P(Z \leq -1.35) = 2 \times 0.0885 = 0.177$. A P-value above 17% gives no clear evidence that the true concentration differs from 0.85 g/L.

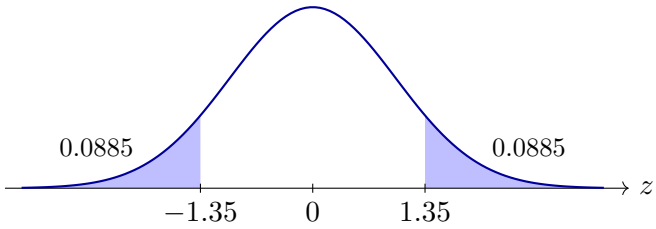


Figure 1: Two-sided P-value in Example 5-5: $P = P(|Z| \geq 1.35) = 0.177$.

5.2.5 Rejection regions and hypothesis testing

If the required strength of evidence α is fixed beforehand, the P-value need not be computed.

Illustration 5-11

In Example 5-4 ($H_0 : \mu = 37000$, $H_1 : \mu > 37000$) take $\alpha = 0.05$. We must decide whether $P(Z \geq z) \leq 0.05$. Two equivalent ways:
(a) compute the P-value from $z = 2$ as in Example 5-4;
(b) compare z with the upper 5% point $z_{0.05} = 1.645$. Since $z = 2 > 1.645$, i.e. $z \geq 1.645$ holds, the result is significant at 5%. Had $z < 1.645$, it would not be.

Definition (Rejection region; hypothesis test)

For fixed α, the set of statistic values declared significant (e.g. $z \geq 1.645$) is the **rejection region**; the conclusion reads "H_0 is rejected (cannot be rejected) at level α". This is **hypothesis**

testing:
(a) find the rejection region corresponding to α;
(b) compute the observed value of the test statistic;
(c) check whether it lies in the rejection region.

Definition (Hypothesis test for μ (σ known, level α))

For $H_0 : \mu = \mu_0$ with $Z = \dfrac{\bar{X} - \mu_0}{\sigma/\sqrt{n}}$ and observed value z, the rejection region is
(a) $z \geq z_\alpha$ if $H_1 : \mu > \mu_0$;
(b) $z \leq -z_\alpha$ if $H_1 : \mu < \mu_0$;
(c) $|z| \geq z_{\alpha/2}$ if $H_1 : \mu \neq \mu_0$.

Frequently $z_{0.05} = 1.645$, $z_{0.025} = 1.96$, $z_{0.01} = 2.326$, $z_{0.005} = 2.576$.

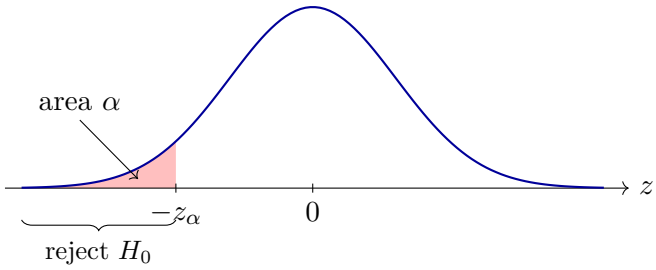


Figure 2: Rejection region $z \leq -z_\alpha$ for $H_1 : \mu < \mu_0$.

Example 5-6 (A faster pain reliever)

An existing painkiller acts in 30 minutes on average ($\sigma = 5$). For a new one, 50 patients give $\bar{x} = 28.5$ minutes (normal, $\sigma = 5$). Test at level 5% whether it acts faster.
Solution. $H_0 : \mu = 30$, $H_1 : \mu < 30$. The rejection region at 5% is

$$z = \frac{\bar{x} - 30}{5/\sqrt{50}} \leq -z_{0.05} = -1.645.$$

Here $z = \frac{28.5-30}{5/\sqrt{50}} = -2.12$ lies in the rejection region, so H_0 is rejected at 5%: the evidence that the new drug is faster exceeds the prescribed level.

Example 5-7 (Sprinklers at level 1%)

In Illustrations 5-5 and 5-9 ($n = 9$, $\bar{x} = 55.63$, $\sigma = 0.9$), test $H_0 : \mu = 55$ against $H_1 : \mu \neq 55$ at level 1%.
Solution. $z = \frac{55.63-55}{0.9/\sqrt{9}} = 2.1$, and the rejection region is $|z| \geq z_{0.005} = 2.576$. Since $2.1 < 2.576$, H_0 cannot be rejected at 1%: the evidence of a process abnormality is not stronger than the 1% level.

The conclusion depends on α: Example 5-6 has $P = P(Z \leq -2.12) = 0.0170$ (rejected at 0.05, not at 0.01), Example 5-7 $P = P(|Z| \geq 2.1) = 0.0357$ (likewise). The P-value reports evidence without fixing α; a decision needs α chosen for the context.

5.2.6 Two kinds of error

A level-α test is a rule for choosing between H_0 and H_1, and it can err in two ways.

Decision \ Truth	H_0 true	H_1 true
Do not reject H_0 (choose H_0)	correct	Type II error
Reject H_0 (choose H_1)	Type I error	correct

Illustration 5-12: Type I error probability

In Example 5-6 the level-α rejection region is $\frac{\bar{X}-30}{5/\sqrt{50}} \le -z_\alpha$, so

$$P(\text{Type I error}) = P\Big(\frac{\bar{X}-30}{5/\sqrt{50}} \le -z_\alpha \;\Big|\; \mu = 30\Big) = P(Z \le -z_\alpha) = \alpha.$$

The level-α rejection region has Type I error probability at most α (for $H_0 : \mu \ge \mu_0$ the maximum is at $\mu = \mu_0$).

Illustration 5-13: Type II error probability

In Example 5-6, a true mean of 28 minutes would be a notable improvement. If $\mu = 28$, a Type II error occurs when H_0 is not rejected:

$$\begin{aligned} P\Big(\frac{\bar{X}-30}{5/\sqrt{50}} > -1.645 \;\Big|\; \mu = 28\Big) &= P\Big(\frac{\bar{X}-28}{5/\sqrt{50}} + \frac{28-30}{5/\sqrt{50}} > -1.645 \;\Big|\; \mu = 28\Big) \\ &= P(Z > 2\sqrt{2} - 1.645) = P(Z > 1.183) \approx 0.1190. \end{aligned}$$

Just as α bounds the Type I error, one may require the Type II error probability at a specified alternative to be at most β; this is achieved by choosing n.

Example 5-8 (Sample size for given α and β)

In Example 5-6, find n such that the level-0.05 test has Type II error probability at most $\beta = 0.1$ when $\mu = 28$.

Solution. As in Illustration 5-13,

$$\begin{aligned} P\Big(\frac{\bar{X}-30}{5/\sqrt{n}} > -1.645 \;\Big|\; \mu = 28\Big) &= P\Big(\frac{\bar{X}-28}{5/\sqrt{n}} + \frac{28-30}{5/\sqrt{n}} > -1.645 \;\Big|\; \mu = 28\Big) \\ &= P\Big(Z > \frac{30-28}{5/\sqrt{n}} - 1.645\Big) \le 0.1. \end{aligned}$$

Since $z_{0.1} = 1.282$, this requires $\frac{30-28}{5/\sqrt{n}} - 1.645 \ge 1.282$, i.e.

$$n \ge \Big\{\frac{1.645 + 1.282}{(30-28)/5}\Big\}^2 = 53.546.$$

The required sample size is $n = 54$.

Definition (Sampling inspection; power)

Choosing n and the rejection region so that Type I error $\le \alpha$ and Type II error at $\mu = \mu_1$ is $\le \beta$ is **sampling inspection** (quality control). The probability of rejecting H_0 when $\mu = \mu_1$

is the **power** at μ_1.

Illustration 5-14: power

For the 5% test of Illustration 5-13, the power at $\mu = 28$ is

$$P\Big(\frac{\bar{X} - 30}{5/\sqrt{50}} \leq -1.645 \;\Big|\; \mu = 28\Big) = 1 - 0.1190 = 0.8810.$$

Conditions for valid inference

For the methods of this chapter to be valid:
(a) the sample must be drawn at random;
(b) the assumptions on the population distribution must be checked.