

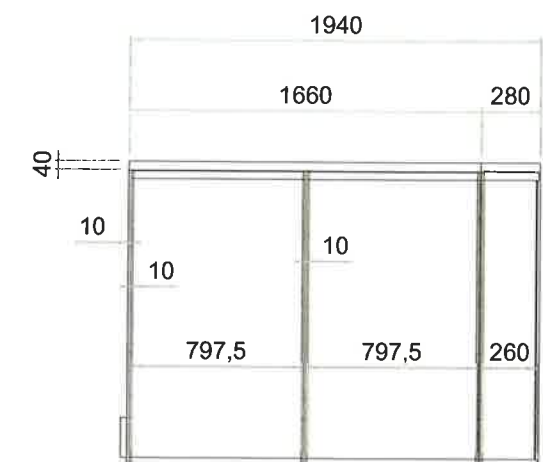
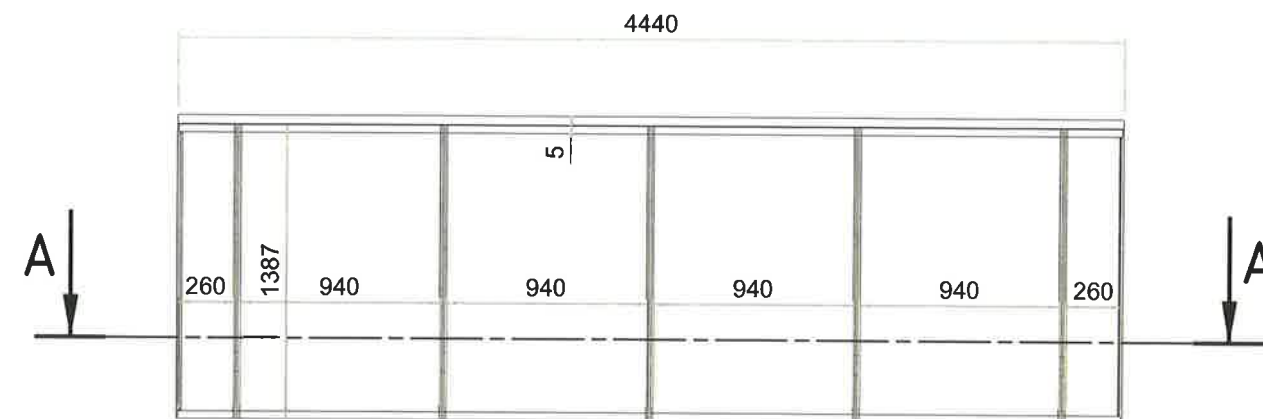


| Désignation                                        | Repère | Longueur  | Angle de coupe 1 | Angle de coupe 2 | Quantité | Largeur   | Largeur boîte (mise à plat) | Masse      |
|----------------------------------------------------|--------|-----------|------------------|------------------|----------|-----------|-----------------------------|------------|
|                                                    |        |           |                  |                  | 1        |           |                             | 13133,72kg |
|                                                    | 1      |           |                  |                  | 1        | 0,00mm    | 0,00mm                      | 0,00kg     |
|                                                    | 2      |           |                  |                  | 1        | 0,00mm    | 0,00mm                      | 12428,37kg |
|                                                    | 3      |           |                  |                  | 2        | 0,00mm    | 0,00mm                      | 28,53kg    |
|                                                    | 4      |           |                  |                  | 2        | 0,00mm    | 0,00mm                      | 28,95kg    |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 5      | 80,00mm   | 0,00°            | 0,00°            | 1        |           |                             | 1,44kg     |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 6      | 80,00mm   | 0,00°            | 0,00°            | 1        |           |                             | 1,44kg     |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 7      | 80,00mm   | 0,00°            | 0,00°            | 2        |           |                             | 1,44kg     |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 8      | 80,00mm   | 0,00°            | 0,00°            | 2        |           |                             | 1,44kg     |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 9      | 160,00mm  | 0,00°            | 0,00°            | 7        |           |                             | 2,88kg     |
| patte vitrage 60                                   | 10     |           |                  |                  | 40       |           |                             |            |
| plat-50x5                                          | 11     | 1392,00mm | 0,00°            | 0,00°            | 2        | 0,00mm    | 0,00mm                      | 2,73kg     |
| plat-50x5                                          | 12     | 1392,00mm | 0,00°            | 0,00°            | 2        | 0,00mm    | 0,00mm                      | 2,73kg     |
| plat-50x10                                         | 13     | 1392,00mm | 0,00°            | 0,00°            | 1        | 0,00mm    | 0,00mm                      | 5,46kg     |
| plat-50x10                                         | 14     | 1392,00mm | 0,00°            | 0,00°            | 1        | 0,00mm    | 0,00mm                      | 5,46kg     |
| plat-50x10                                         | 15     | 1392,00mm | 0,00°            | 0,00°            | 7        | 0,00mm    | 0,00mm                      | 5,46kg     |
| profil alu+joint                                   | 16     | 260,00mm  | 0,00°            | 45,00°           | 2        |           |                             |            |
| profil alu+joint                                   | 17     | 260,00mm  | 0,00°            | 45,00°           | 2        |           |                             |            |
| profil alu+joint                                   | 18     | 260,00mm  | 45,00°           | 0,00°            | 2        |           |                             |            |
| profil alu+joint                                   | 19     | 260,00mm  | 45,00°           | 0,00°            | 2        |           |                             |            |
| profil alu+joint                                   | 20     | 797,50mm  | 0,00°            | 0,00°            | 4        |           |                             |            |
| profil alu+joint                                   | 21     | 797,50mm  | 0,00°            | 0,00°            | 4        |           |                             |            |
| profil alu+joint                                   | 22     | 940,00mm  | 0,00°            | 0,00°            | 4        |           |                             |            |
| profil alu+joint                                   | 23     | 940,00mm  | 0,00°            | 0,00°            | 4        |           |                             |            |
| Profilé plat plein 20× 10, NFA 45-005              | 24     | 667,50mm  | 0,00°            | 0,00°            | 2        |           |                             | 1,05kg     |
| Profilé plat plein 20× 10, NFA 45-005              | 25     | 667,50mm  | 0,00°            | 0,00°            | 2        |           |                             | 1,05kg     |
| Profilé plat plein 20× 10, NFA 45-005              | 26     | 810,00mm  | 0,00°            | 0,00°            | 4        |           |                             | 1,27kg     |
| tube 80x40                                         | 27     | 280,00mm  | 45,00°           | 0,00°            | 1        | 0,00mm    | 0,00mm                      | 0,66kg     |
| tube 80x40                                         | 28     | 280,00mm  | 45,00°           | 0,00°            | 1        | 0,00mm    | 0,00mm                      | 0,66kg     |
| tube 80x40                                         | 29     | 1660,00mm | 0,00°            | 0,00°            | 1        | 0,00mm    | 0,00mm                      | 4,57kg     |
| tube 80x40                                         | 30     | 1660,00mm | 0,00°            | 0,00°            | 1        | 0,00mm    | 0,00mm                      | 4,57kg     |
| tube 80x40                                         | 31     | 4440,00mm | 45,00°           | 45,00°           | 1        | 0,00mm    | 0,00mm                      | 12,01kg    |
| vitrage                                            | 32     |           |                  |                  | 4        | 1363,00mm | 797,50mm                    | 23,91kg    |
| vitrage                                            | 33     |           |                  |                  | 4        | 1363,00mm | 940,00mm                    | 28,19kg    |

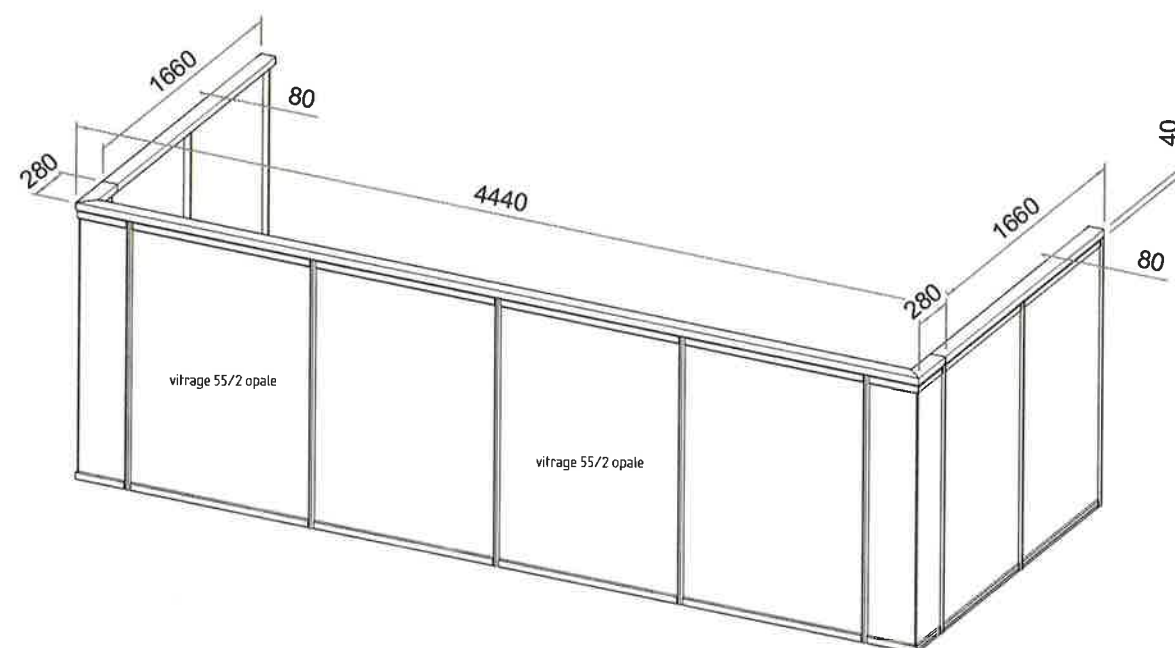




A - A

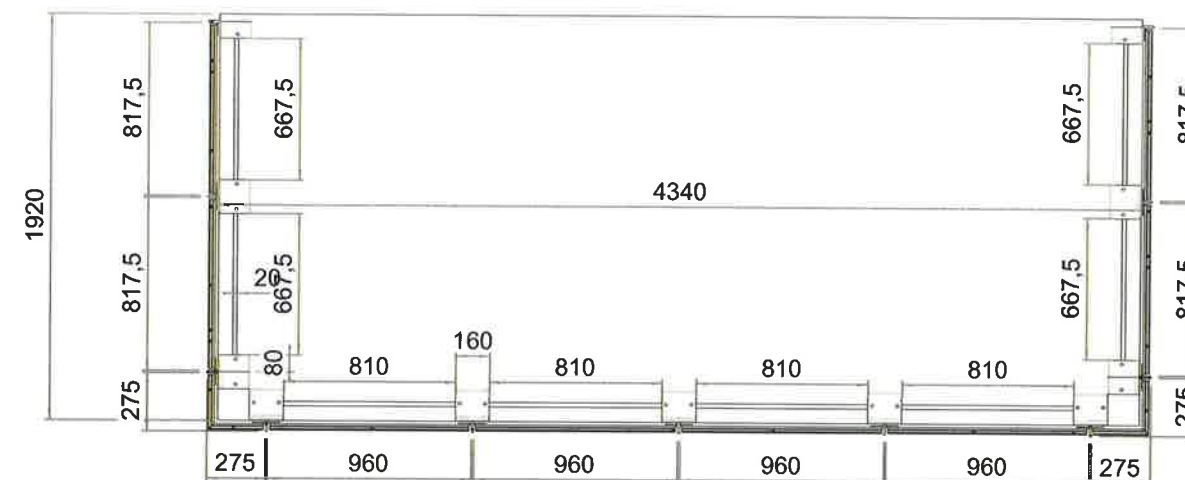


|                                                                                                                                                             |                                                                                       |                        |                      |                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------|----------------------|------------------|
| Désignation :<br><b>gc-rep 27 bat A</b>                                                                                                                     | Auteur : <b>ETUDE 2</b>                                                               |                        | <b>A3</b>            |                  |
|                                                                                                                                                             | Date : <b>26/08/2016</b>                                                              |                        |                      |                  |
| Référence :<br><b>CH0038</b>                                                                                                                                |  | Ech.<br><b>3 : 100</b> | Révision<br><b>A</b> | Page<br><b>-</b> |
|  <b>SAS SCHONT</b><br>68 rue saint exupéry<br>69124 colombier saugnieu | Chantier :<br><b>180</b>                                                              |                        |                      |                  |

| Désignation                                        | Repère | Longueur  | Angle de coupe 1 | Angle de coupe 2 | Quantité | largeur_jeur boîte (mise à plat) | Largeur boîte (mise à plat) | Masse      |
|----------------------------------------------------|--------|-----------|------------------|------------------|----------|----------------------------------|-----------------------------|------------|
|                                                    |        |           |                  |                  | 1        |                                  |                             | 13133,72kg |
|                                                    | 1      |           |                  |                  | 1        | 0,00mm                           | 0,00mm                      | 0,00kg     |
|                                                    | 2      |           |                  |                  | 1        | 0,00mm                           | 0,00mm                      | 12428,37kg |
|                                                    | 3      |           |                  |                  | 2        | 0,00mm                           | 0,00mm                      | 28,53kg    |
|                                                    | 4      |           |                  |                  | 2        | 0,00mm                           | 0,00mm                      | 28,95kg    |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 5      | 80,00mm   | 0,00°            | 0,00°            | 1        |                                  |                             | 1,44kg     |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 6      | 80,00mm   | 0,00°            | 0,00°            | 1        |                                  |                             | 1,44kg     |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 7      | 80,00mm   | 0,00°            | 0,00°            | 2        |                                  |                             | 1,44kg     |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 8      | 80,00mm   | 0,00°            | 0,00°            | 2        |                                  |                             | 1,44kg     |
| Cornière à ailes inégales 150 × 90 × 10, ISO 657-2 | 9      | 160,00mm  | 0,00°            | 0,00°            | 7        |                                  |                             | 2,88kg     |
| patte vitrage 60                                   | 10     |           |                  |                  | 40       |                                  |                             |            |
| plat-50x5                                          | 11     | 1392,00mm | 0,00°            | 0,00°            | 2        | 0,00mm                           | 0,00mm                      | 2,73kg     |
| plat-50x5                                          | 12     | 1392,00mm | 0,00°            | 0,00°            | 2        | 0,00mm                           | 0,00mm                      | 2,73kg     |
| plat-50x10                                         | 13     | 1392,00mm | 0,00°            | 0,00°            | 1        | 0,00mm                           | 0,00mm                      | 5,46kg     |
| plat-50x10                                         | 14     | 1392,00mm | 0,00°            | 0,00°            | 1        | 0,00mm                           | 0,00mm                      | 5,46kg     |
| plat-50x10                                         | 15     | 1392,00mm | 0,00°            | 0,00°            | 7        | 0,00mm                           | 0,00mm                      | 5,46kg     |
| profil alu+joint                                   | 16     | 260,00mm  | 0,00°            | 45,00°           | 2        |                                  |                             |            |
| profil alu+joint                                   | 17     | 260,00mm  | 0,00°            | 45,00°           | 2        |                                  |                             |            |
| profil alu+joint                                   | 18     | 260,00mm  | 45,00°           | 0,00°            | 2        |                                  |                             |            |
| profil alu+joint                                   | 19     | 260,00mm  | 45,00°           | 0,00°            | 2        |                                  |                             |            |
| profil alu+joint                                   | 20     | 797,50mm  | 0,00°            | 0,00°            | 4        |                                  |                             |            |
| profil alu+joint                                   | 21     | 797,50mm  | 0,00°            | 0,00°            | 4        |                                  |                             |            |
| profil alu+joint                                   | 22     | 940,00mm  | 0,00°            | 0,00°            | 4        |                                  |                             |            |
| profil alu+joint                                   | 23     | 940,00mm  | 0,00°            | 0,00°            | 4        |                                  |                             |            |
| Profilé plat plein 20× 10, NFA 45-005              | 24     | 667,50mm  | 0,00°            | 0,00°            | 2        |                                  |                             | 1,05kg     |
| Profilé plat plein 20× 10, NFA 45-005              | 25     | 667,50mm  | 0,00°            | 0,00°            | 2        |                                  |                             | 1,05kg     |
| Profilé plat plein 20× 10, NFA 45-005              | 26     | 810,00mm  | 0,00°            | 0,00°            | 4        |                                  |                             | 1,27kg     |
| tube 80x40                                         | 27     | 280,00mm  | 45,00°           | 0,00°            | 1        | 0,00mm                           | 0,00mm                      | 0,66kg     |
| tube 80x40                                         | 28     | 280,00mm  | 45,00°           | 0,00°            | 1        | 0,00mm                           | 0,00mm                      | 0,66kg     |
| tube 80x40                                         | 29     | 1660,00mm | 0,00°            | 0,00°            | 1        | 0,00mm                           | 0,00mm                      | 4,57kg     |
| tube 80x40                                         | 30     | 1660,00mm | 0,00°            | 0,00°            | 1        | 0,00mm                           | 0,00mm                      | 4,57kg     |
| tube 80x40                                         | 31     | 4440,00mm | 45,00°           | 45,00°           | 1        | 0,00mm                           | 0,00mm                      | 12,01kg    |
| vitrage                                            | 32     |           |                  |                  | 4        | 1363,00mm                        | 797,50mm                    | 23,91kg    |
| vitrage                                            | 33     |           |                  |                  | 4        | 1363,00mm                        | 940,00mm                    | 28,19kg    |


Rep= 27 .

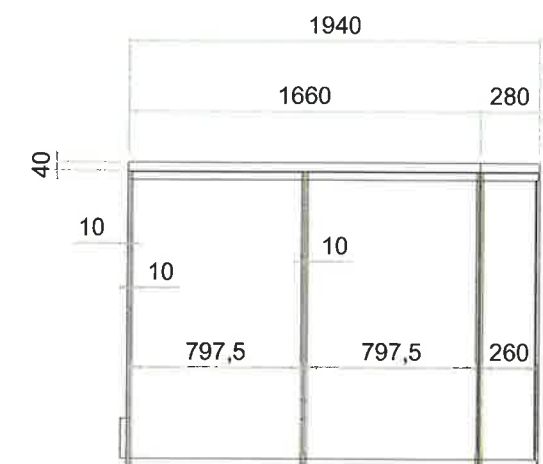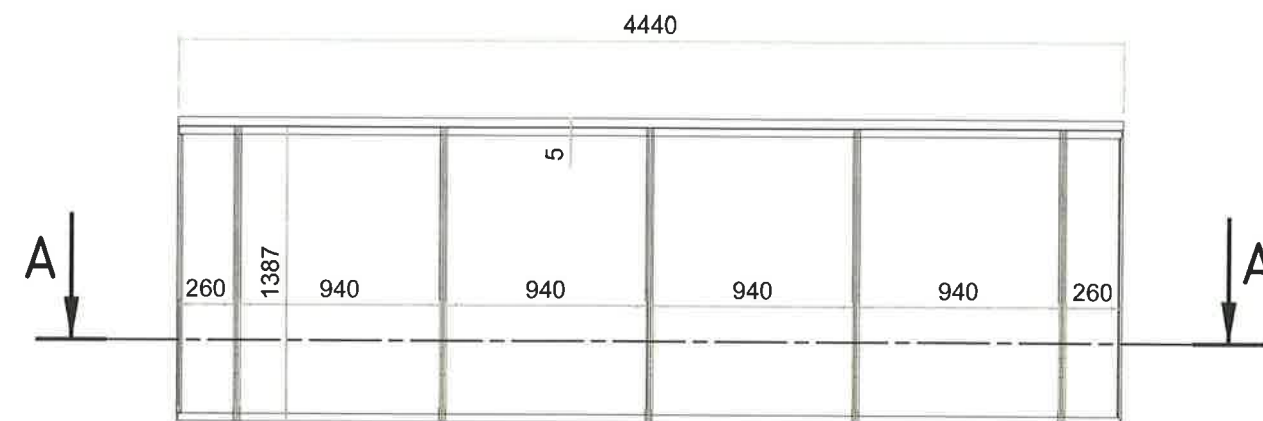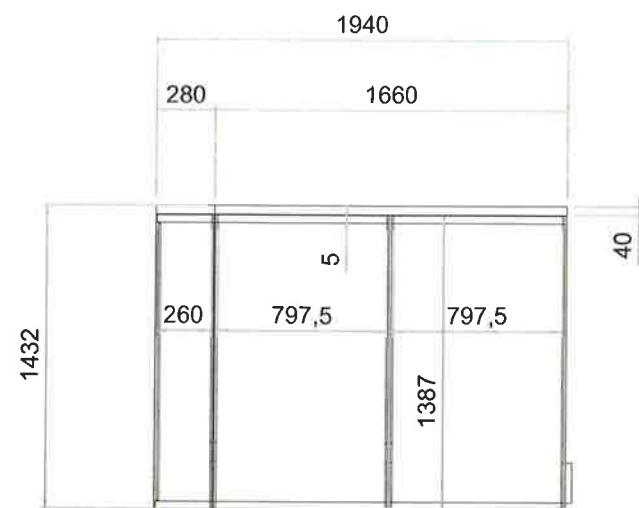

A - A

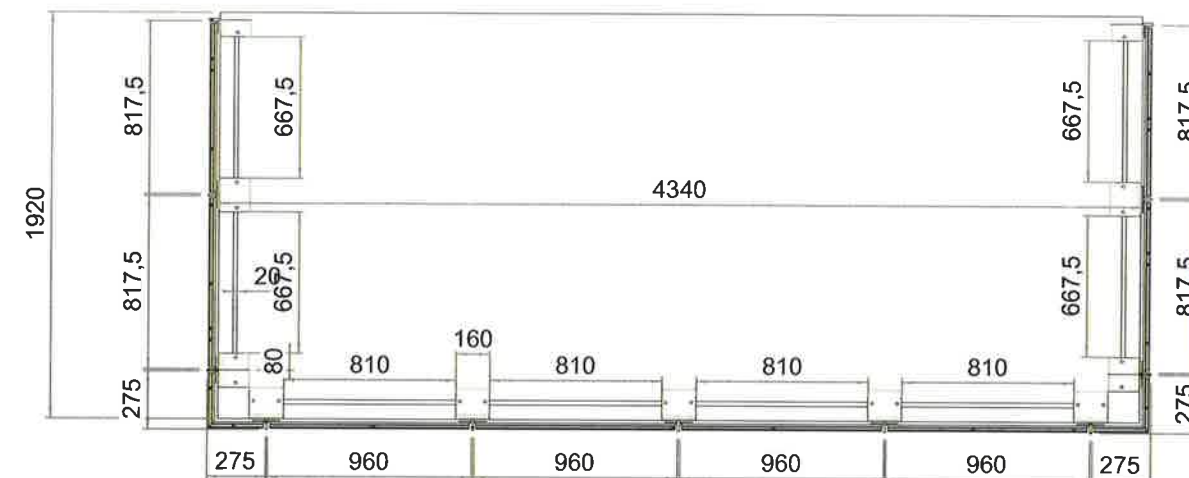

80x40

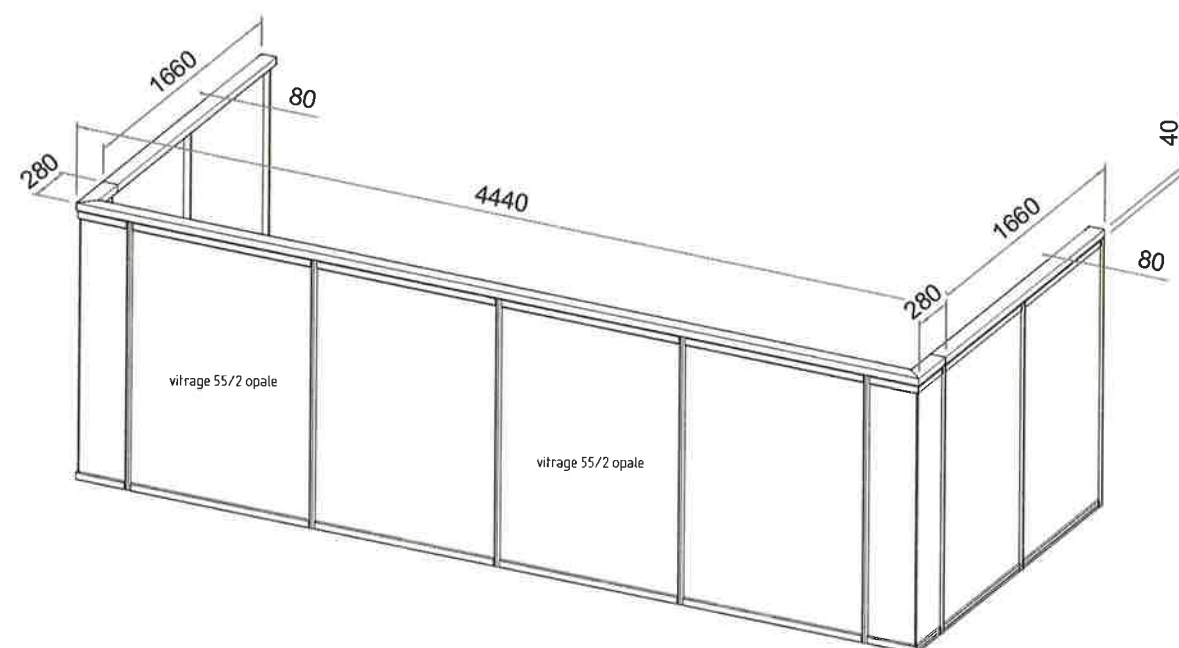

|                                                                                                                                                      |                                                                                       |  |                 |               |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--|-----------------|---------------|-----------|
| Désignation :<br>gc-rep 28 bat A                                                                                                                     | Auteur : ETUDE 2                                                                      |  | A3              |               |           |
|                                                                                                                                                      | Date : 26/08/2016                                                                     |  |                 |               |           |
| Référence :<br>CH0038                                                                                                                                |  |  | Ech.<br>3 : 100 | Révision<br>A | Page<br>- |
|  SAS SCHONT<br>68 rue saint exupéry<br>69124 colombier saugnieu | Chantier :<br><b>180</b>                                                              |  |                 |               |           |