

Malay

➤ Fiche technique

➤ **Composition** PVC compact sur support textile (Protex)

➤ **Poids total** 460 g/m² (nominal)

➤ **Poids du vinyle** 420 g/m² (nominal)

➤ **Poids du support** 40 g/m² (nominal)

➤ **Résistance à la lumière** 7

➤ **Lessivabilité** Super lessivable et brossable

➤ Dimensions :

➤ **Longueur** 30 m

➤ **Largeur** 130 cm

➤ **Colle recommandée** Colle vinylique type Newmor Heavy

➤ **Classement au feu** M1 suivant le PV n° F120734-CEMATE/3
Euro class B - s2,d0

➤ **Classement acoustique** $\alpha_w = 0,15$

➤ Protection antimicrobienne :

➤ Malay est manufacturé sous le label OBPA. Aseptisés par Interside®, il empêche la prolifération des champignons, actinomycètes, rouilles, moisissures et bactéries telles que le MRSA.

➤ Garantie commerciale :

➤ Posés suivant le DTU 59,4, l'usine garantit ses revêtements pour une période de 5 ans après la livraison, dans le cadre d'une utilisation normale.



130 cm



M1
Euro class
B-s2,d0



Colle
vinylique



Traitement
antimicrobien



30 m





Excellent
ISO 105-B02 7/8



Super lessivable
et brossable

LRV = Indice de réflectivité

1024.01 - 1024.54

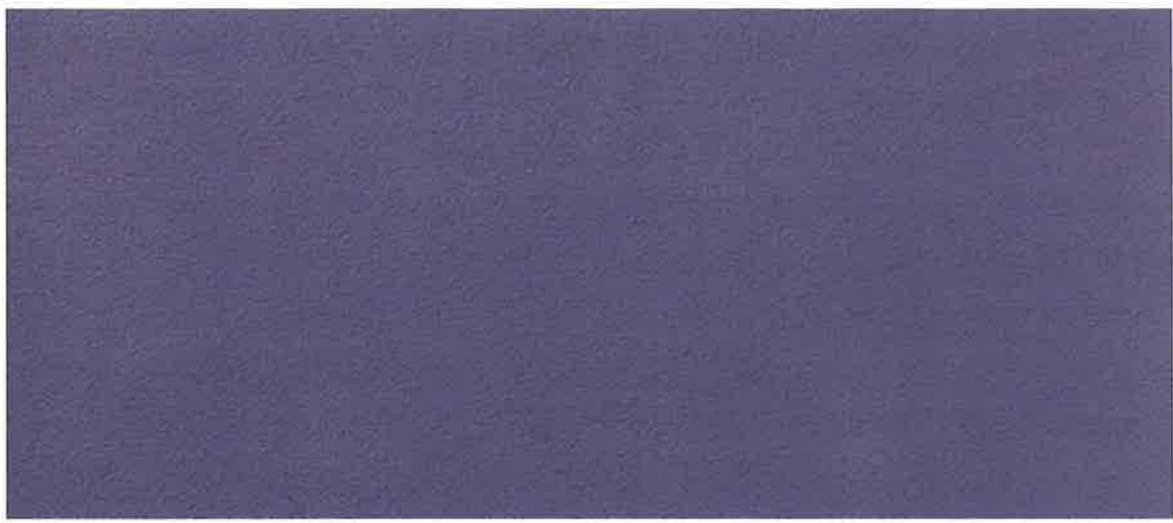



Declaration of Performances

Nr : V2015 - 008

1. Product type Decorative wallcovering referenced :
" Vescom vinyl wallcovering – Cotton backed
Total weight approx. 350 gr/m² "
2. Product type reference For details see label on the rolls .
3. Intended use Hanging on to internal walls or partitions having a fire performance of
A2-s1-d0 or better by means of adhesive
for the primary purpose of decoration
4. Manufacturer Vescom BV
St. Jozefstraat 20
5753 AV Deurne The Netherlands
5. Authorised representative Not applicable
6. System of assesment System 1 of Annex ZA of EN 15102 : 2007
7. Harmonised standard EN 15102 : 2007
Notified body : Warrington certification , EC reference nr 1121
EC certificate of conformity 1121-CPD-KA0018
8. Technical assesment Not applicable

9. Declared performance

Essential Characteristics	Performance	Report reference
Reaction-to-fire EN 13501-1	B-s1,d0	2015-Efectis-R000382
Release of formaldehyde heavy metals and VCM EN 12149 (A ,B ,C)	Pass	2010-TÜV Rheinland
Thermal resistance EN 12667	NPD	
Sound absorption ISO 354	NPD	

10. The performances of the product identified in points 1 and 2 are in conformity with the declared performances in point 9 .

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4 .

Signed for and on behalf of the manufacturer by :

Name and title : A. de Voogd , Director of Operations and Purchasing

Place and date : Deurne , may 28 , 2015

Signature :