



Allure™ EC-Sensor Series

Room Temperature Sensors



Overview

The Allure EC-Sensor series are versatile room temperature sensors. All Allure EC-Sensor models possess an integrated temperature sensor for precision local temperature sensing.

Applications

- Precise temperature monitoring
- Allows occupant setpoint adjustment, fan speed selection, and system override initiation and status indication
- Provides a local area network service access point

Features & Benefits

- Slim, compact style, and clean lines are well received by architects and building owners.
- Onboard Local Area Network (LAN) jack is accessible without removing the cover to allow quick access to the network for commissioning or troubleshooting controllers (except for the Allure EC-Sensor-T).
- For people working outside of core hours, an occupancy control extends normal system operating hours for continued comfort while saving energy when possible. Occupancy status is shown with a LED indicator.
- Fan speed selector for improved personal comfort with the Allure EC-Sensor-SOF model.
- Accurate temperature monitoring while some models have setpoint override for increased individual comfort.

Model Selection

PDITE-SENSORTX0	Space temperature sensor (no communication jack). Sold in bulk pack of 10 units
PDITE-SENSORX0	Space temperature sensor with communication jack
PDITE-SENSOROX0	Space temperature sensor with override and communication jack
PDITE-SENSORSX0	Space temperature sensor with setpoint cool/warm and communication jack
PDITE-SENSOR-SOX0	Space temperature sensor with setpoint cool/warm, override and communication jack
PDITE-SENSOR-SOFX0	Space temperature sensor with setpoint cool/warm, override, fan speed selection and communication jack

Product Specifications

Environmental

Operating Temperature _____ 0°C to 50°C; 32°F to 122°F
Storage Temperature _____ -20°C to 70°C; -4°F to 158°F
Relative Humidity _____ 0 to 90% non-condensing

Communication

LAN Access Jack¹ _____ Audio jack, 1/8" (3.5mm)

Enclosure

Material _____ ABS type PA-765A
Color _____ Off white
Dimensions (overall) _____ 4.62" x 3.29" x 1.58" (117mm x 84mm x 40mm)
Shipping Weight:
☐ Per sensor _____ 0.4lbs (0.18kg)
☐ Per box of 10 EC-Sensor-T sensors _____ 2lbs (0.9kg)
Installation _____ Wall mounting through mounting holes
(see figure below for hole positions)

Temperature Sensor

Type _____ 10KΩ Type II Thermistor (10kΩ @ 25°C; 77°F)
Range _____ 0°C to 50°C; 32°F to 122°F
Accuracy _____ ±0.5°C; ±0.9°F

Functions

Occupancy Override _____ Momentary push-button switch short-circuits the thermistor
LED (occupancy) _____ Green, powered by 12 VDC or 24 VAC
Setpoint Cool/Warm (+/-) _____ 10 kΩ linear rotary potentiometer
Fan Speed Selection _____ 5-position rotary-switch with factory-programmed resistance values
☐ Auto _____ 0 Ohms
☐ Off _____ 2500 Ohms
☐ Fan Speed 1 _____ 5000 Ohms
☐ Fan Speed 2 _____ 7500 Ohms
☐ Fan Speed 3 _____ 10 000 Ohms

Agency Approvals

UL Listed (CDN & US) _____ UL916 Energy management equipment
Material² _____ UL94V-1


Electromagnetic Compatibility

CE _____ 2004/108/EC

1. Except for the EC-Sensor-T sensor model.

2. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive.

Dimensions

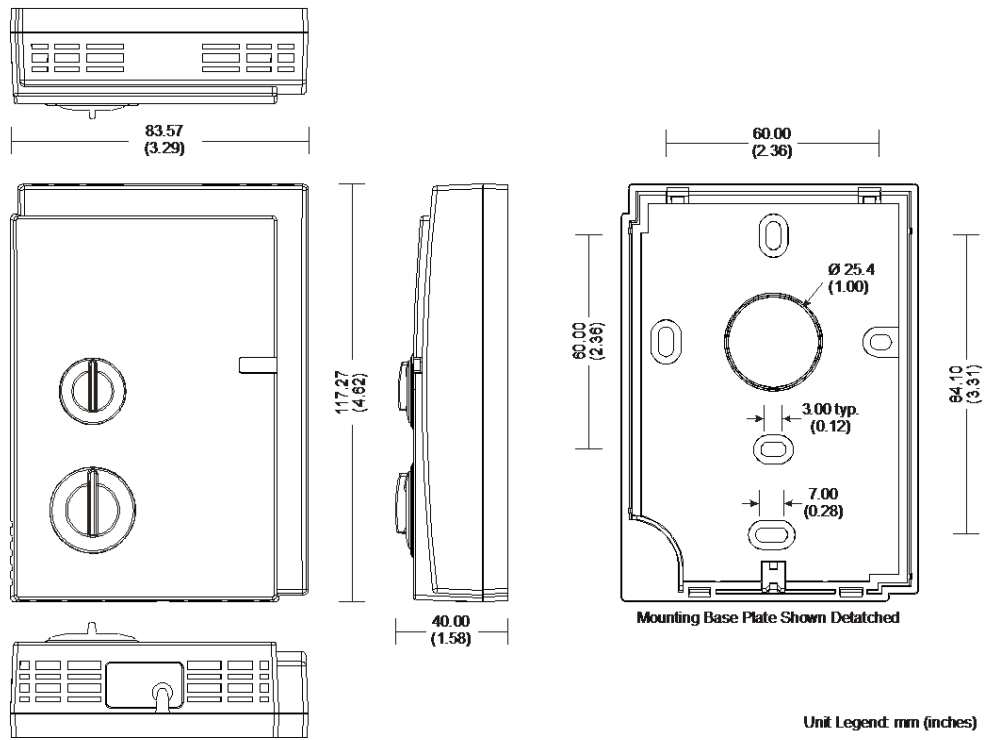

Specifications subject to change without notice.
 Distech Controls, and the Distech Controls logo are trademarks of Distech Controls Inc. All other trademarks are property of their respective owner.
 ©, Distech Controls Inc., 2015. All rights reserved.