

# ROCKHOPPER CENTER SECTION


Section = 890cm, 100lbs Lead

14 Sections (Excluding End Sects.)

60cm Spacing between chains

- Section Makeup -
- 2 - 16" x 1", 2.5" thick Rockhopper Discs
- 8 - 16" x 1" Floppy Discs
- 5" x 1" Filler Rubber (tread cut)

80- Evenly Spaced,  
1-1/4 lbs leads , (100lbs total)

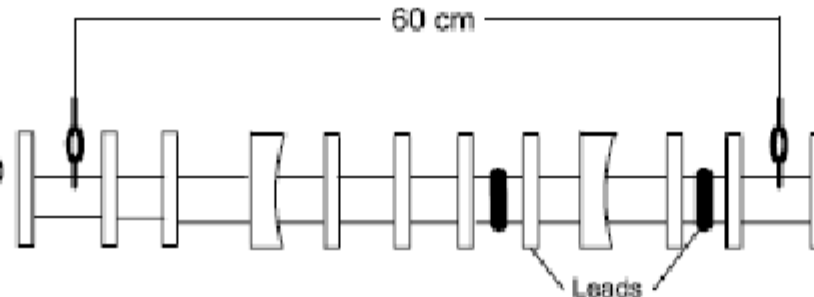


## TOTAL CENTER SECTION

30- 16" x 1", 2.5" thick rockhoppers  
(2 per section with 1 in end sections)

116- 16" x 1" floppy discs  
(8 per section with 2 in the end sections)  
(4 floppys between each rockhopper)

80 pieces of 1-1/4lbs lead (100lbs total),  
evenly spaced in between end rockhoppers.

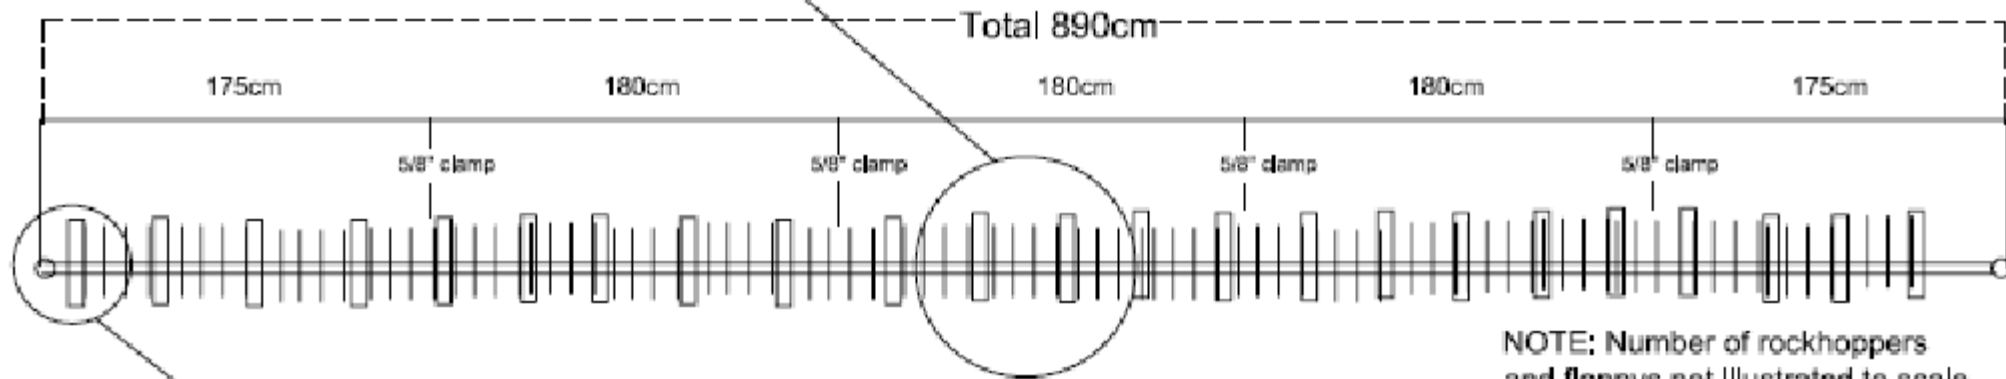


NOTE: Number of rockhoppers  
and floppys not illustrated to scale

## Beginning and End Sections

25cm Inside the eye to chain

- End Section Makeup-

- 1- 16"x1", 2.5" thick Rockhopper Disc
- 2- 16"x1" Floppy Discs
- 3/4" ESCO s.s. Sockets
- 6" x 2-3/8" Filler Rubber cover the 3/4" socket

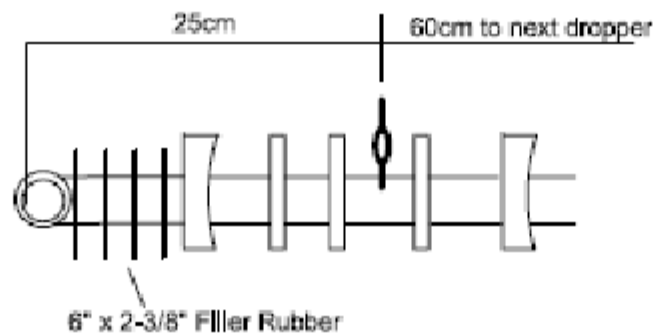

Clamp in every 3rd section

4, 5/8" Wire Clamps total in center section  
spaced as shown above

15 drop chains total, drop chains are  
2 links of 5/8" long link trawlex and  
1 5/8" headless shackle

3/4" 6x25 IWRC  
STAINLESS STEEL WIRE

3/4" ESCO STAINLESS STEEL  
SOCKETS

4, 5/8" WIRE CLAMPS

80, 1-1/4 lbs LEADS EVENLY  
SPACED, 100lbs total

5" x 1" FILLER RUBBER  
tread cut

6" x 2-3/8" FILLER RUBBER  
To Cover Sockets on End Sects.

15 HANGING CHAINS  
EACH 2-LINKS OF  
5/8" LONG LINK TRAWLEX +  
1, 5/8" HEADLESS SHACKLE