

# Topic 3: Work and Energy

## Advanced Placement Physics 1

---

Dr. Timothy Leung

July 13, 2020

Olympiads School

# Files for You to Download

These are the slides and homework questions for this week.

- **PhysAP1-03-workEnergy.pdf**—Slides on work and energy
- **PhysAP1-04-momentum.pdf**—Slides on momentum, impulse and general collisions

Please download/print the PDF file before class. There is no advantage to copying notes that are already printed out for you. Instead, focus on details that aren't necessarily on the slides. If you want to print the slides, we recommend that you print 4 slides per page to save paper.

# Work and Energy

We start with some definition at are (unfortunately) not very useful:

- **Energy** is the ability to do work.
- **Work** is the mechanism in which energy is transformed.

Luckily, we can also use equations to define these concepts.

# Work

---

# Mechanical Work

**Mechanical work** is performed when a force  $\mathbf{F}$  displaces an object by  $\Delta\mathbf{x}$ . If the force is *constant*, then the work done is given by the dot product between the force and displacement vectors:

$$\boxed{W = \mathbf{F} \cdot \Delta\mathbf{x}} \quad \text{or} \quad \boxed{W = F\Delta x \cos \theta}$$

where  $\theta$  is the angle between the two vectors. You should already know that:

- Work is a scalar quantity
- No work done if no displacement ( $\Delta\mathbf{x} = \mathbf{0}$ )
- No work done when  $\mathbf{F} \perp \Delta\mathbf{x}$ , when (i.e.  $\mathbf{F} \cdot \Delta\mathbf{x} = 0$ ; the force did not cause the displacement)
- Work can be positive or negative depending on the dot product (or in the scalar case,  $\cos \theta$ )

# Definition of Mechanical Work

## Work done by a force

- The work done by *one specific force*
- Example: A boy pushes a cart forward. The “work done by the boy” is the work done by the applied force.

## Work done on an object

- There may be more than one force acting on an object
- The *sum* of all the work done on the object by each force
- The work done by the net force
- Also called the **net work**  $W_{\text{net}}$

# Kinetic Energy

---

# Kinetic Energy

When a net force on an object accelerates it, the resulting amount of work done on the object (net work  $W_{\text{net}}$ ) is given by:

$$W_{\text{net}} = \int \mathbf{F}_{\text{net}} \cdot d\mathbf{x} = \int m\mathbf{a} \cdot d\mathbf{x} = m \int \frac{d\mathbf{v}}{dt} \cdot d\mathbf{x}$$

Since both  $\mathbf{v}$  and  $\mathbf{x}$  are continuous functions in time, we can switch the order of differentiation, i.e.:

$$= m \int \frac{d\mathbf{x}}{dt} \cdot d\mathbf{v} = m \int \mathbf{v} \cdot d\mathbf{v} = m \int_{v_1}^{v_2} v dv$$

and since  $\mathbf{v}$  and  $d\mathbf{v}$  must be in the same direction, the dot product is trivial:

$$\mathbf{v} \cdot d\mathbf{v} = v dv$$



# Kinetic Energy

This integral, when integrated from  $v_1$  (initial speed) to  $v_2$  (final speed), becomes:

$$= m \int_{v_1}^{v_2} v dv = \frac{1}{2} m v^2 \Big|_{v_1}^{v_2} = \Delta K$$

where  $K$  is defined as the **translational kinetic energy**:

$$K = \frac{1}{2} m v^2$$

Later in the course we will discuss *rotational* kinetic energy.

# Work and Kinetic Energy

In fact, the *definition* of kinetic energy came from this integration, in that work equals to the change in *something*, and we define that as kinetic energy. This is the **work-energy theorem**:

$$W_{\text{net}} = \Delta K$$

- $\Delta K$  can be positive or negative depending on the dot product
- When multiple forces acting on an object; each force can add or remove kinetic energy from an object
- Therefore we use the “net” amount of work done in the above equation

# Potential Energy

---

# Gravitational Force & Gravitational Potential Energy

The gravitational force (weight) of an object is defined as:

$$\mathbf{w} = m\mathbf{g}$$

Near Earth's surface, we assume that  $\mathbf{g} = -g\hat{\mathbf{j}} = -9.81\hat{\mathbf{j}} \text{ m/s}^2$  is constant. The work done to move an object from height  $h_1$  to  $h_2$  is therefore:

$$W = \int \mathbf{w} \cdot d\mathbf{h} = \int_{h_1}^{h_2} -mg\hat{\mathbf{j}} \cdot dh\hat{\mathbf{j}} = -mgh \Big|_{h_1}^{h_2} = -\Delta U_g$$

where  $U_g$  is defined as the **gravitational potential energy**:

$$U_g = mgh$$

# Spring Force & Elastic Potential Energy

The spring force  $\mathbf{F}_e$  is the force that a compressed/stretched spring exerts on the object connected to it. It obeys Hooke's law:

$$\mathbf{F}_e = -k\mathbf{x}$$

We can find the work done to displace a spring:

$$W = \int \mathbf{F}_e \cdot d\mathbf{x} = -k \int x dx = -\frac{1}{2}kx^2 \Big|_{x_1}^{x_2} = -\Delta U_e$$

where  $U_e$  is defined as the **elastic potential energy**:

$$U_e = \frac{1}{2}kx^2$$

# Conservative Forces

Gravitational force, spring force, electrostatic force (later in the course) are called **conservative forces**

- The work done by these forces relate to a change of another quantity called *potential energy*
- Since the potential energy is evaluated at the end points, the work done by a conservative force is *path independent*

# Conservative Forces

Expressions for potential energies are obtained by integrating the work done by the conservative forces, these forces are therefore the negative gradient of the potential energies:

$$\mathbf{F} = -\nabla U = -\frac{\partial U}{\partial x}\hat{i} - \frac{\partial U}{\partial y}\hat{j} - \frac{\partial U}{\partial z}\hat{k}$$

The direction of a conservative force *always* decreases the potential energy. In 1D:

$$\mathbf{F} = -\frac{dU}{dx}$$

Pay attention to the negative sign. Students often forget it.

# Work and Potential Energy

The expressions for potential energies also come from integrating the work equation, in that work equals to the change in *something*, and we called that potential energy. Therefore:

$$W = -\Delta U$$

- $\Delta U$  can be positive or negative depending on the direction of the (conservative) force
- Positive work *decreases* the related potential energy
- Negative work *increases* the related potential energy



# Conservation of Mechanical Energy

Positive work done by conservative forces on an object does two things:

1. Decrease its potential energy, while
2. Increase its kinetic energy by the same amount

Mathematically, this shows that mechanical energy must always be conserved when there are only conservative forces:

$$W = -\Delta U = \Delta K \quad \longrightarrow \quad \Delta K + \Delta U = 0$$


That's why those forces are called conservative forces!

# Conservation of Energy

---

# Isolated Systems and the Conservation of Energy

An **isolated system** is a system of objects that does not interact with the surrounding. Think of an isolated system as a bunch of objects inside an insulated box.




# Isolated Systems and Conservation of Energy


- Since the system is isolated from the surrounding environment, the environment can't do any work on it, by definition!
- Likewise, the energy inside the system cannot escape either
- Therefore energy of the system is conserved
- There are *internal* force inside the system that is doing work, but the work only converts kinetic energy into potential energies, and vice versa.

## Example: Mass sliding on a spring

- Assuming that there is no friction in any part of the system
- The isolated system consists of the mass and the spring
- Energies:
  - Kinetic energy of the mass
  - Elastic potential energy stored in the spring




# Example: Gravity

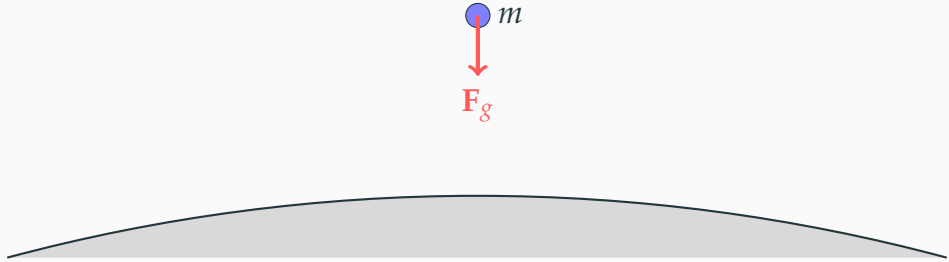

- The isolated system consists of the mass and Earth
- Assuming no friction
- Energies:
  - Kinetic energy of the mass
  - Gravitational potential energy of the mass


# Example: Vertical spring-mass system



- The system consists of a mass, a spring and Earth
- Energies:
  - Kinetic energy of the mass
  - Gravitational potential energy of the mass
  - Elastic potential energy stored in the spring
- The total energy of the system is conserved if there is no friction

# What if there is friction?

Energy is always conserved as long as your system is defined properly



- The system consists of a mass, a spring, Earth and all the air particles inside the box
- As the mass vibrates, friction with air slows it down
- While the mass loses energy, the temperature of the air rises due to friction
- Energies:
  - Kinetic and gravitational potential energies of the mass
  - Elastic potential energy stored in the spring
  - Kinetic energy of the vibration of the air molecules
- Total energy is conserved even as the mass stops moving



# Conservation of Energy

If *only* conservative forces are doing work, mechanical energy (i.e.  $K + U$ ) is always conserved:

$$K + U = K' + U'$$

When non-conservative forces are also doing work, instead of *trying* to isolate the system, we can calculate the work done by them  $W_{\text{nc}}$  and add it to the total energy of the system

$$K + U + W_{\text{nc}} = K' + U'$$

# Non-Conservative Force

Work done by these non-conservative forces are *usually* negative because they oppose the direction of motion

- Drag (fluid resistance)
- Kinetic friction


The work done by these non-conservative forces may be positive or negative, depending on the problem

- Applied force
- Tension force
- Normal force

Note that the work-kinetic energy theorem still applies when non-conservative forces are present


# Example

**Example 2:** A mass  $m$  is dropped from a height of  $h$  above the equilibrium position of a spring. Set up the equation that determines the spring's compression  $d$  when the object is instantaneously at rest.

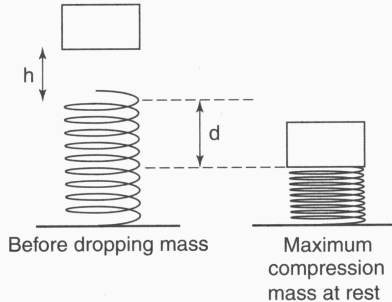

# Energy Diagrams

- Plots of potential energy ( $U$ ) vs. position for a conservative force

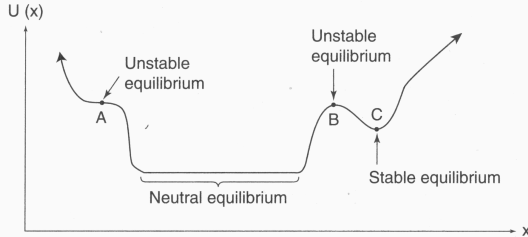

- If more than one conservative force, they can be combined into one graph
- Where slope is zero means no force acting on it: it is in a state of **equilibrium**
- An object placed at an equilibrium point with  $K = 0$  will remain there

# Power & Efficiency

---

# Power

**Power** is the *rate* at which work is done, i.e. the rate at which energy is being transformed:

$$\bar{P} = \frac{W}{\Delta t}$$

| Quantity                        | Symbol       | SI Unit |
|---------------------------------|--------------|---------|
| Instantaneous and average power | $P, \bar{P}$ | W       |
| Work done                       | $W$          | J       |
| Time interval                   | $\Delta t$   | s       |

In engineering, power is often more critical than the actual amount of work done.

# Power

If a constant force is used to push an object at a constant velocity, the power produced by the force is:

$$P = \frac{W}{\Delta t} = \frac{\mathbf{F} \cdot \Delta \mathbf{x}}{\Delta t} = \mathbf{F} \cdot \frac{\Delta \mathbf{x}}{\Delta t} \rightarrow \boxed{P = \mathbf{F} \cdot \mathbf{v}}$$

Application: aerodynamics

- When an object moves through air, the applied force must overcome air resistance (drag force), which is proportional with  $v^2$
- Therefore “aerodynamic power” must scale with  $v^3$  (i.e. doubling your speed requires  $2^3 = 8$  times more power)
- Important when aerodynamic forces dominate

# Efficiency

**Efficiency** is the ratio of useful energy or work output to the total energy or work input

$$\eta = \frac{E_o}{E_i} \times 100 \% \quad \eta = \frac{W_o}{W_i} \times 100 \%$$

| Quantity             | Symbol | SI Unit  |
|----------------------|--------|----------|
| Useful output energy | $E_o$  | J        |
| Input energy         | $E_i$  | J        |
| Useful output work   | $W_o$  | J        |
| Input work           | $W_i$  | J        |
| Efficiency           | $\eta$ | no units |

Efficiency is always  $0 \leq \eta \leq 100 \%$