


External power supply with 12-24V

Motor - e.g. AMB 1050  
with rpm-connection

230V Power Socket

In case, the OCS2 is powered within 12-24V - COM1 can be used for power. Otherwise, use an external power supply with the right voltage

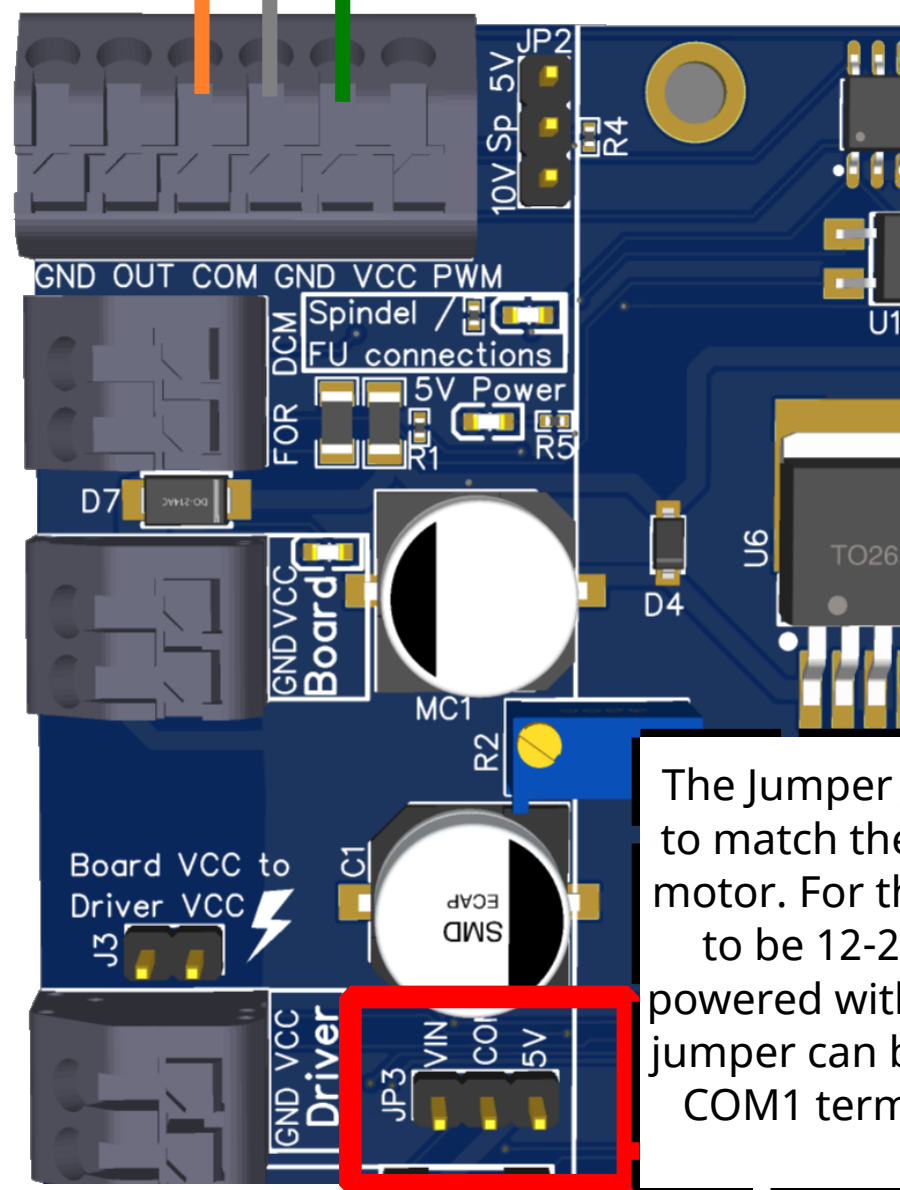

## OCS2 RPM-Controlled Motor connection schema

The Jumper JP3 should be configured to match the required voltage for the motor. For this motor, the voltage has to be 12-24V. In case the shield is powered within this voltage range, the jumper can be set to VIN and then the COM1 terminal can be used for the motor

