SYNTHETIC DEMO DRAWING - NOT A REAL PRODUCT

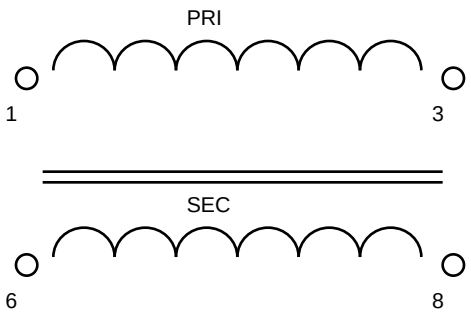

CORE

CORE PART NUMBER
E32/16/9-3C94

WINDING TABLE

WDG	START	FINISH	TURNS	WIRE	STRANDS	CURRENT
PRI	1	3	24	20 AWG	1	2.5 A RMS
SEC	6	8	6	16 AWG	2	10 A RMS

ELECTRICAL

PARAMETER	VALUE
MAGNETIZING INDUCTANCE (PRI, 10 kHz)	1.0 mH MIN
PRIMARY DRIVE	48 V SQUARE, 100 kHz
TURNS RATIO (PRI:SEC)	4:1
HIPOT, PRI TO SEC	3000 VAC, 60 s

NOTES

1. WIND EVENLY IN ONE DIRECTION; LEADS AS SHOWN.
2. VARNISH IMPREGNATE AFTER WINDING.
3. MARK WITH DRAWING NUMBER AND DATE CODE.
4. SYNTHETIC EXAMPLE FOR A SOFTWARE DEMO; NOT FOR MANUFACTURE.

TITLE

TRANSFORMER, ISOLATED DC-DC, 48V

DRAWING NO. **XFMR-001**

REV **A**