**SYNTHETIC DEMO DRAWING - NOT A REAL PRODUCT**

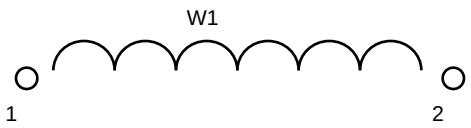


## CORE

| CORE PART NUMBER |
|---|
| 0077894A7 |

## WINDING TABLE

| WDG | START | FINISH | TURNS | WIRE | STRANDS | CURRENT |
|---|---|---|---|---|---|---|
| W1 | 1 | 2 | 40 | 22 AWG | 1 | 3 A RMS |

## ELECTRICAL

| PARAMETER | VALUE |
|---|---|
| INDUCTANCE (0 A DC, 10 kHz) | 120 µH +/-10% |
| PEAK CURRENT | 3.5 A |
| HIPOT, WINDING TO CORE | 1500 VAC, 60 s |

**NOTES**

1. WIND EVENLY IN ONE DIRECTION; LEADS AS SHOWN.
2. VARNISH IMPREGNATE AFTER WINDING.
3. MARK WITH DRAWING NUMBER AND DATE CODE.
4. SYNTHETIC EXAMPLE FOR A SOFTWARE DEMO; NOT FOR MANUFACTURE.
5. MAGNET WIRE: HEAVY BUILD (DOUBLE COAT), CLASS 200 °C.
6. TAPE-WRAP CORE BEFORE WINDING; HIPOT DOES NOT RELY ON THE CORE COATING.

TITLE — SHEET 1 OF 1 — SCALE: NONE — UNITS: mm

**INDUCTOR, AUX SUPPLY, 120 µH**

DRAWING NO. **MAG-006** — REV **A**