SYNTHETIC DEMO DRAWING - NOT A REAL PRODUCT

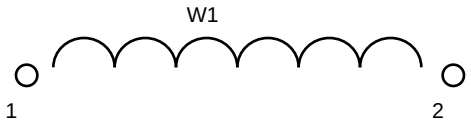

CORE

CORE PART NUMBER
0077548A7

WINDING TABLE

WDG	START	FINISH	TURNS	WIRE	STRANDS	CURRENT
W1	1	2	89	22 AWG	1	0.5 A RMS

ELECTRICAL

PARAMETER	VALUE
INDUCTANCE (0 A DC, 10 kHz)	1.0 mH +/-10%
PEAK CURRENT	0.6 A
HIPOT, WINDING TO CORE	1500 VAC, 60 s

NOTES

1. WIND EVENLY IN ONE DIRECTION; LEADS AS SHOWN.
2. VARNISH IMPREGNATE AFTER WINDING.
3. MARK WITH DRAWING NUMBER AND DATE CODE.
4. SYNTHETIC EXAMPLE FOR A SOFTWARE DEMO; NOT FOR MANUFACTURE.
5. MAGNET WIRE: HEAVY BUILD (DOUBLE COAT), CLASS 200 °C.
6. TAPE-WRAP CORE BEFORE WINDING; HIPOT DOES NOT RELY ON THE CORE COATING.

TITLE — SHEET 1 OF 1 — SCALE: NONE — UNITS: mm

INDUCTOR, FAN SUPPLY, 1.0 mH

DRAWING NO. **MAG-007**

REV **B**