SYNTHETIC DEMO DRAWING - NOT A REAL PRODUCT

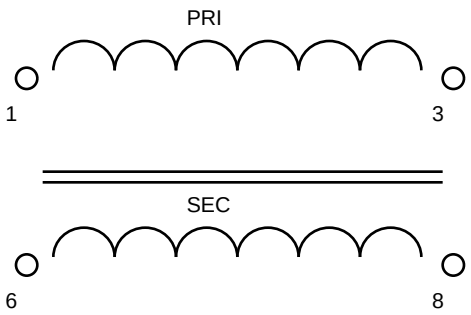

CORE

CORE PART NUMBER
E32/16/9-3C94, 2 PCS (PAIR) + BOBBIN

WINDING TABLE

WDG	START	FINISH	TURNS	WIRE	STRANDS	CURRENT
PRI	1	3	24	20 AWG	1	2 A RMS
SEC	6	8	6	14 AWG	1	8 A RMS

ELECTRICAL

PARAMETER	VALUE
MAGNETIZING INDUCTANCE (PRI, 10 kHz)	1.0 mH MIN
PRIMARY DRIVE	48 V SQUARE, 100 kHz
TURNS RATIO (PRI:SEC)	4:1
HIPOT, PRI TO SEC	3000 VAC, 60 s

NOTES

1. WIND EVENLY IN ONE DIRECTION; LEADS AS SHOWN.
2. VARNISH IMPREGNATE AFTER WINDING.
3. MARK WITH DRAWING NUMBER AND DATE CODE.
4. SYNTHETIC EXAMPLE FOR A SOFTWARE DEMO; NOT FOR MANUFACTURE.
5. MAGNET WIRE: HEAVY BUILD (DOUBLE COAT), CLASS 200 °C.
6. MARGIN TAPE 3 mm EACH END OF WINDING BREADTH.
7. 3 LAYERS 0.05 mm POLYESTER TAPE PRI TO SEC; 2 OVER THE OUTSIDE.

TITLE — SHEET 1 OF 1 SCALE: NONE UNITS: mm

TRANSFORMER, ISOLATED DC-DC, 48 V

DRAWING NO. **XFMR-001** REV **A**