SYNTHETIC DEMO DRAWING - NOT A REAL PRODUCT

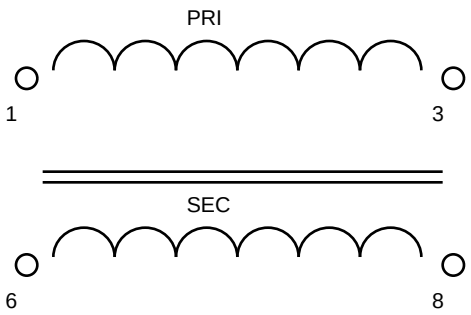

CORE

CORE PART NUMBER
E42/21/15-3C94, 2 PCS (PAIR) + BOBBIN

WINDING TABLE

WDG	START	FINISH	TURNS	WIRE	STRANDS	CURRENT
PRI	1	3	40	22 AWG	1	0.8 A RMS
SEC	6	8	12	20 AWG	1	2 A RMS

ELECTRICAL

PARAMETER	VALUE
MAGNETIZING INDUCTANCE (PRI, 10 kHz)	4.0 mH MIN
PRIMARY DRIVE	24 V SQUARE, 50 kHz
TURNS RATIO (PRI:SEC)	4:1
HIPOT, PRI TO SEC	3000 VAC, 60 s

NOTES

1. WIND EVENLY IN ONE DIRECTION; LEADS AS SHOWN.
2. VARNISH IMPREGNATE AFTER WINDING.
3. MARK WITH DRAWING NUMBER AND DATE CODE.
4. SYNTHETIC EXAMPLE FOR A SOFTWARE DEMO; NOT FOR MANUFACTURE.
5. MAGNET WIRE: HEAVY BUILD (DOUBLE COAT), CLASS 200 °C.
6. MARGIN TAPE 3 mm EACH END OF WINDING BREADTH.
7. 3 LAYERS 0.05 mm POLYESTER TAPE PRI TO SEC; 2 OVER THE OUTSIDE.

TITLE — SHEET 1 OF 1 — SCALE: NONE — UNITS: mm

TRANSFORMER, AUX SUPPLY, 24 V

DRAWING NO. **XFMR-002**

REV **B**