

FPGA Serial Accelerometer Tester, Version 1


by Timothy Stotts

Copyright 2020 Timothy Stotts
MIT License


Hosted at:

<https://github.com/timothystotts/fpga-serial-acl-tester-1>


ACL-Tester-Design-Diagrams document revision 5A

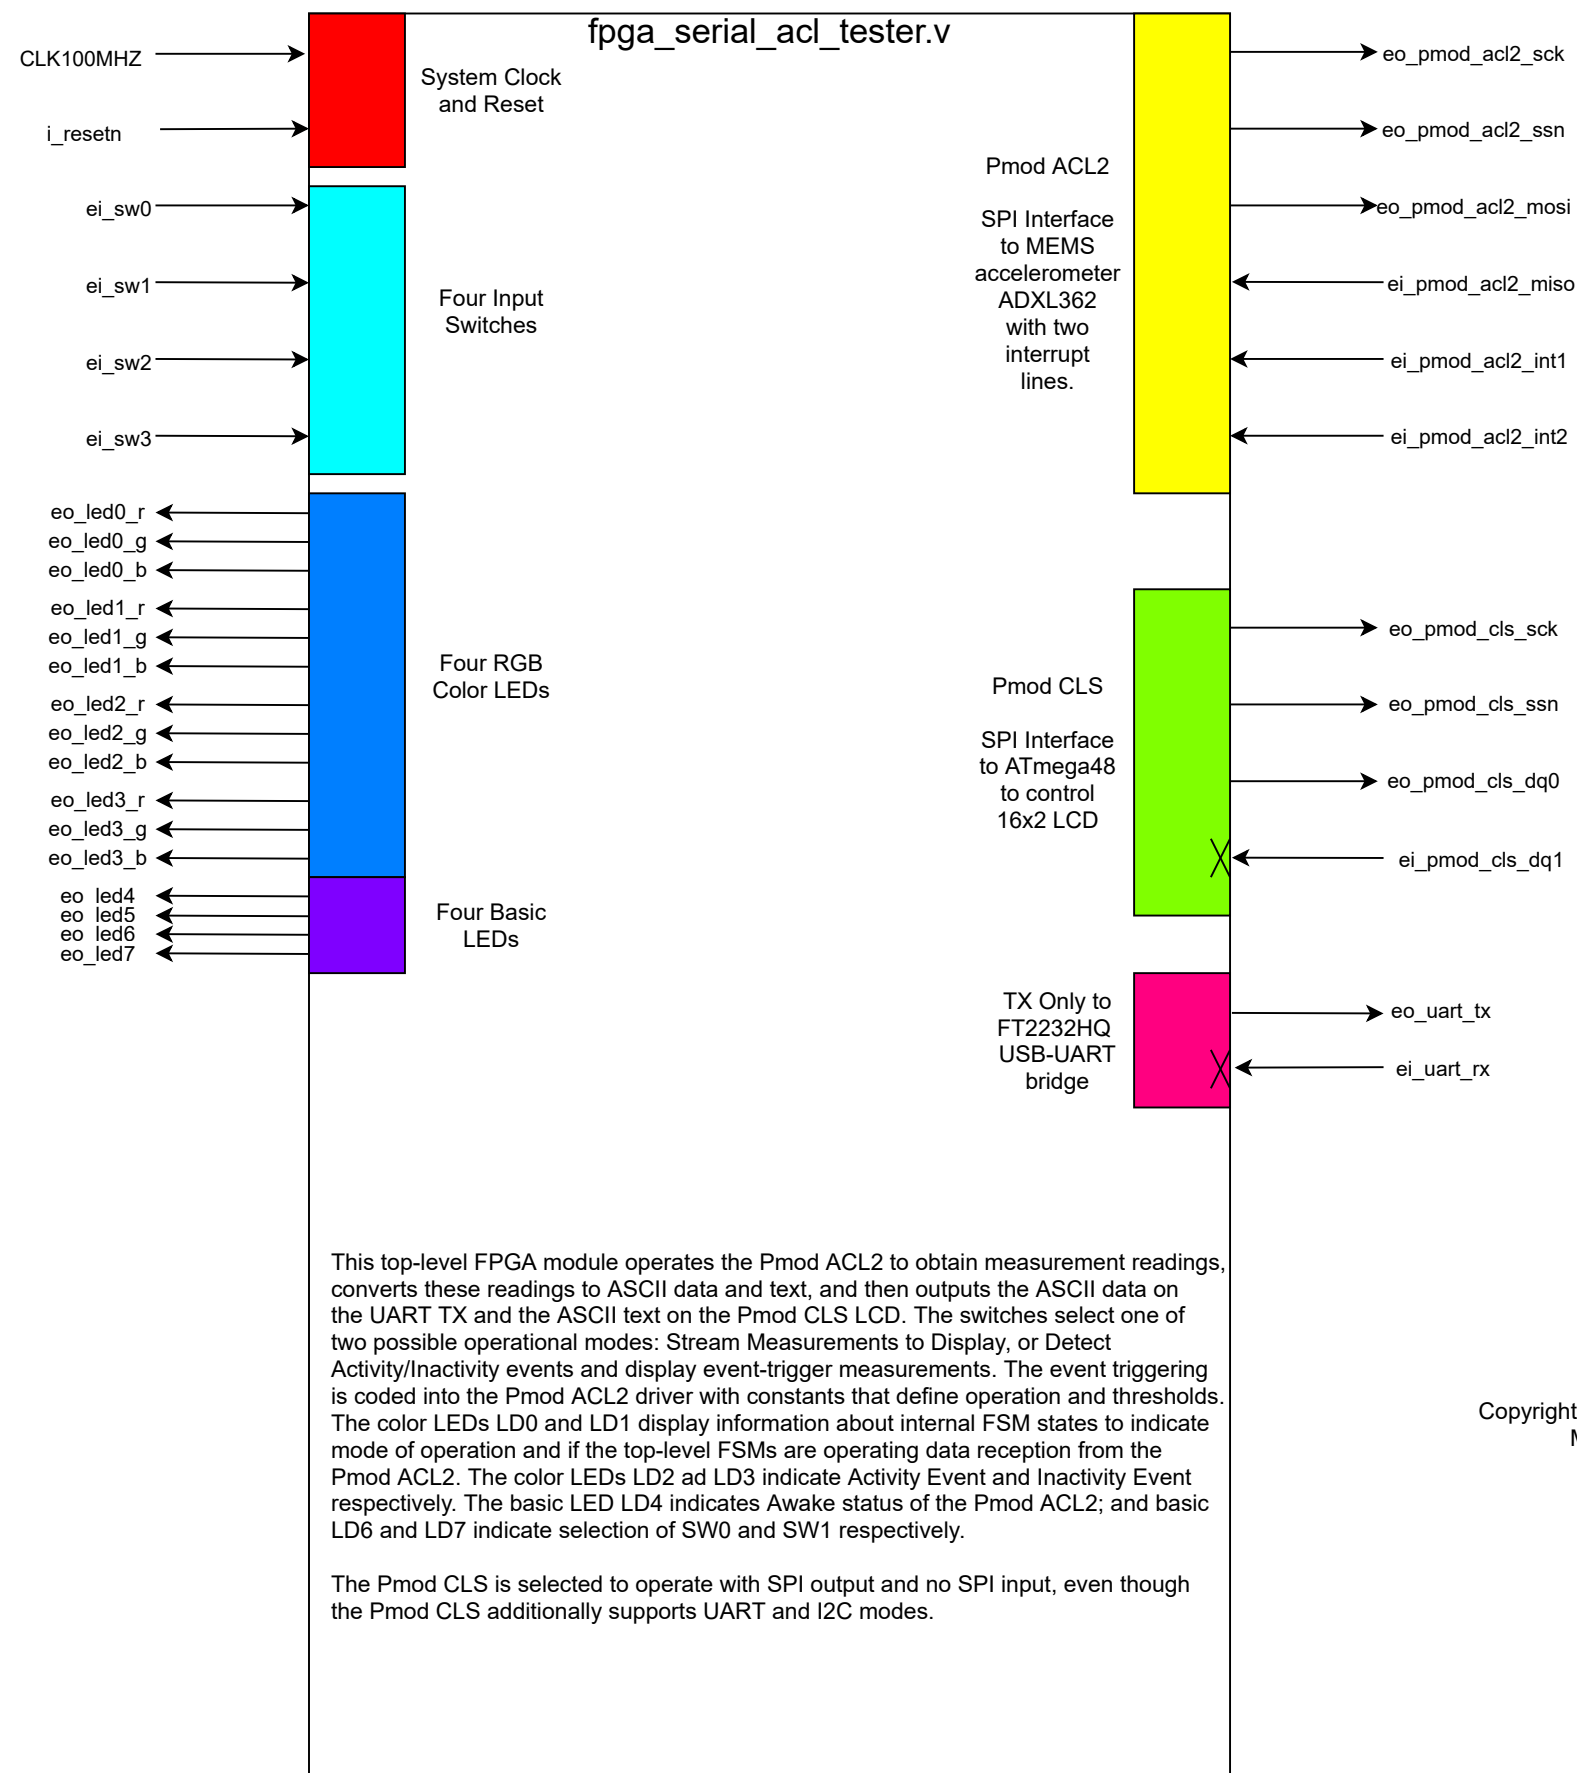


Copyright 2020 Timothy Stotts
MIT License

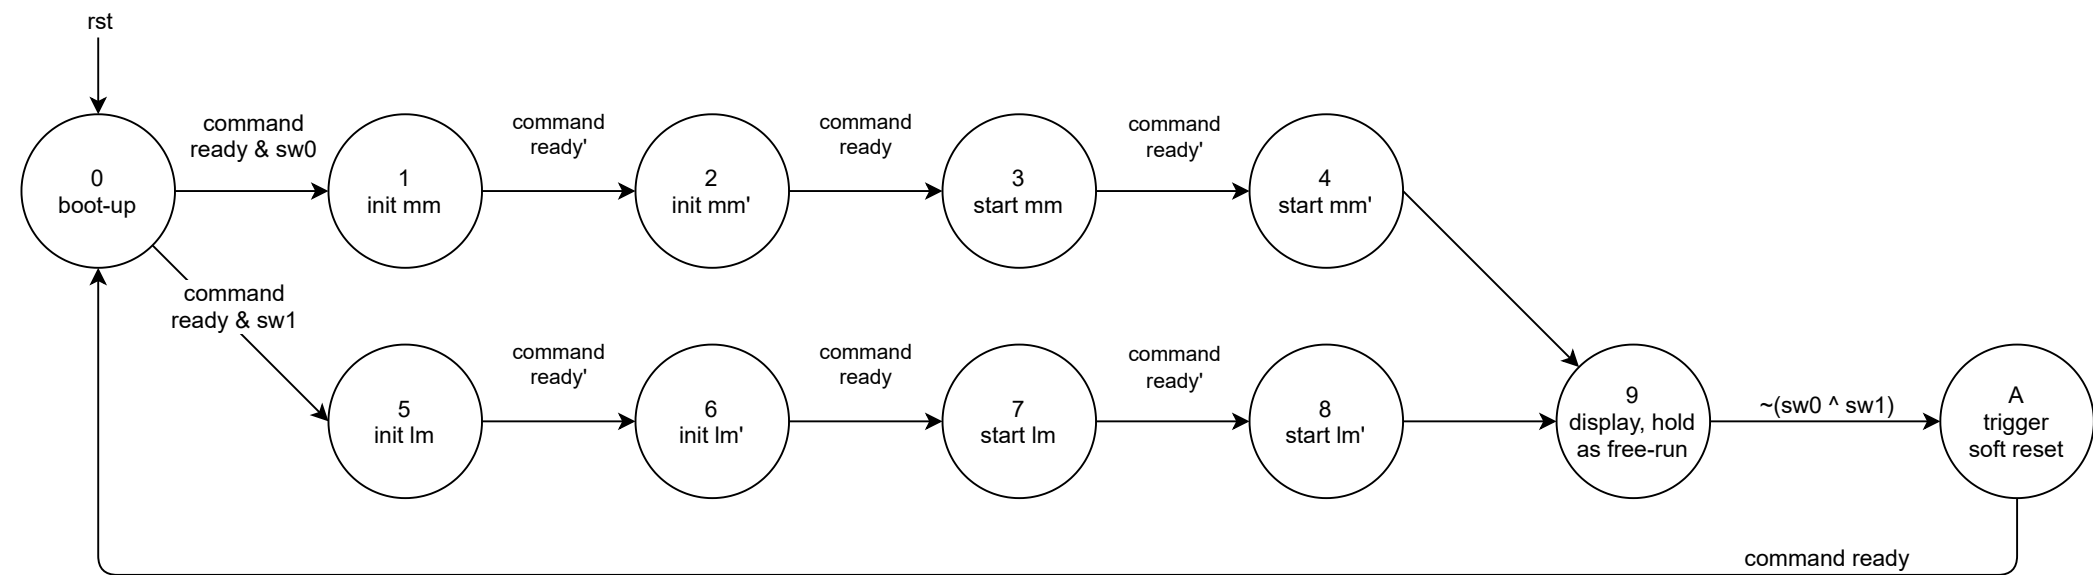


Tester FSM for operating the PMOD ACL2 driver commands.

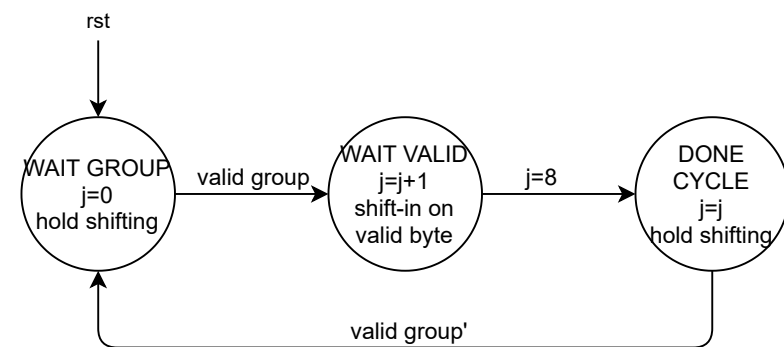


Tester FSM to receive the streamed measurements and shift them into a bit vector.

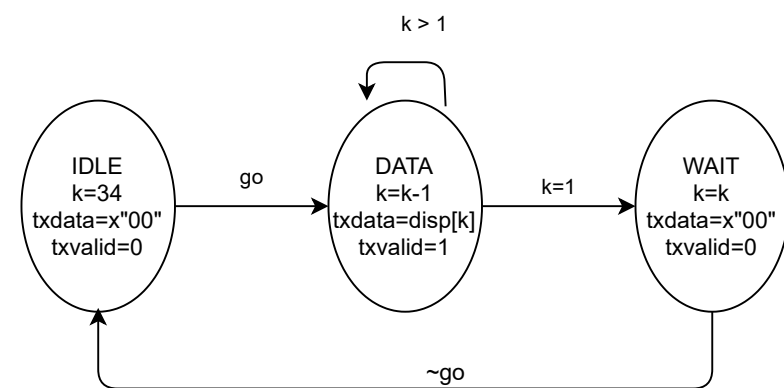



Tester FSM to load the TX ONLY UART with a 32 character text line, plus carriage return and new line.

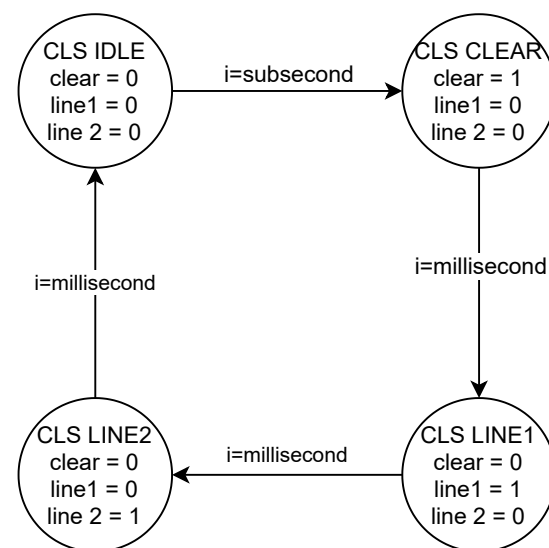

Tester FSM for updating the PMOD CLS display.

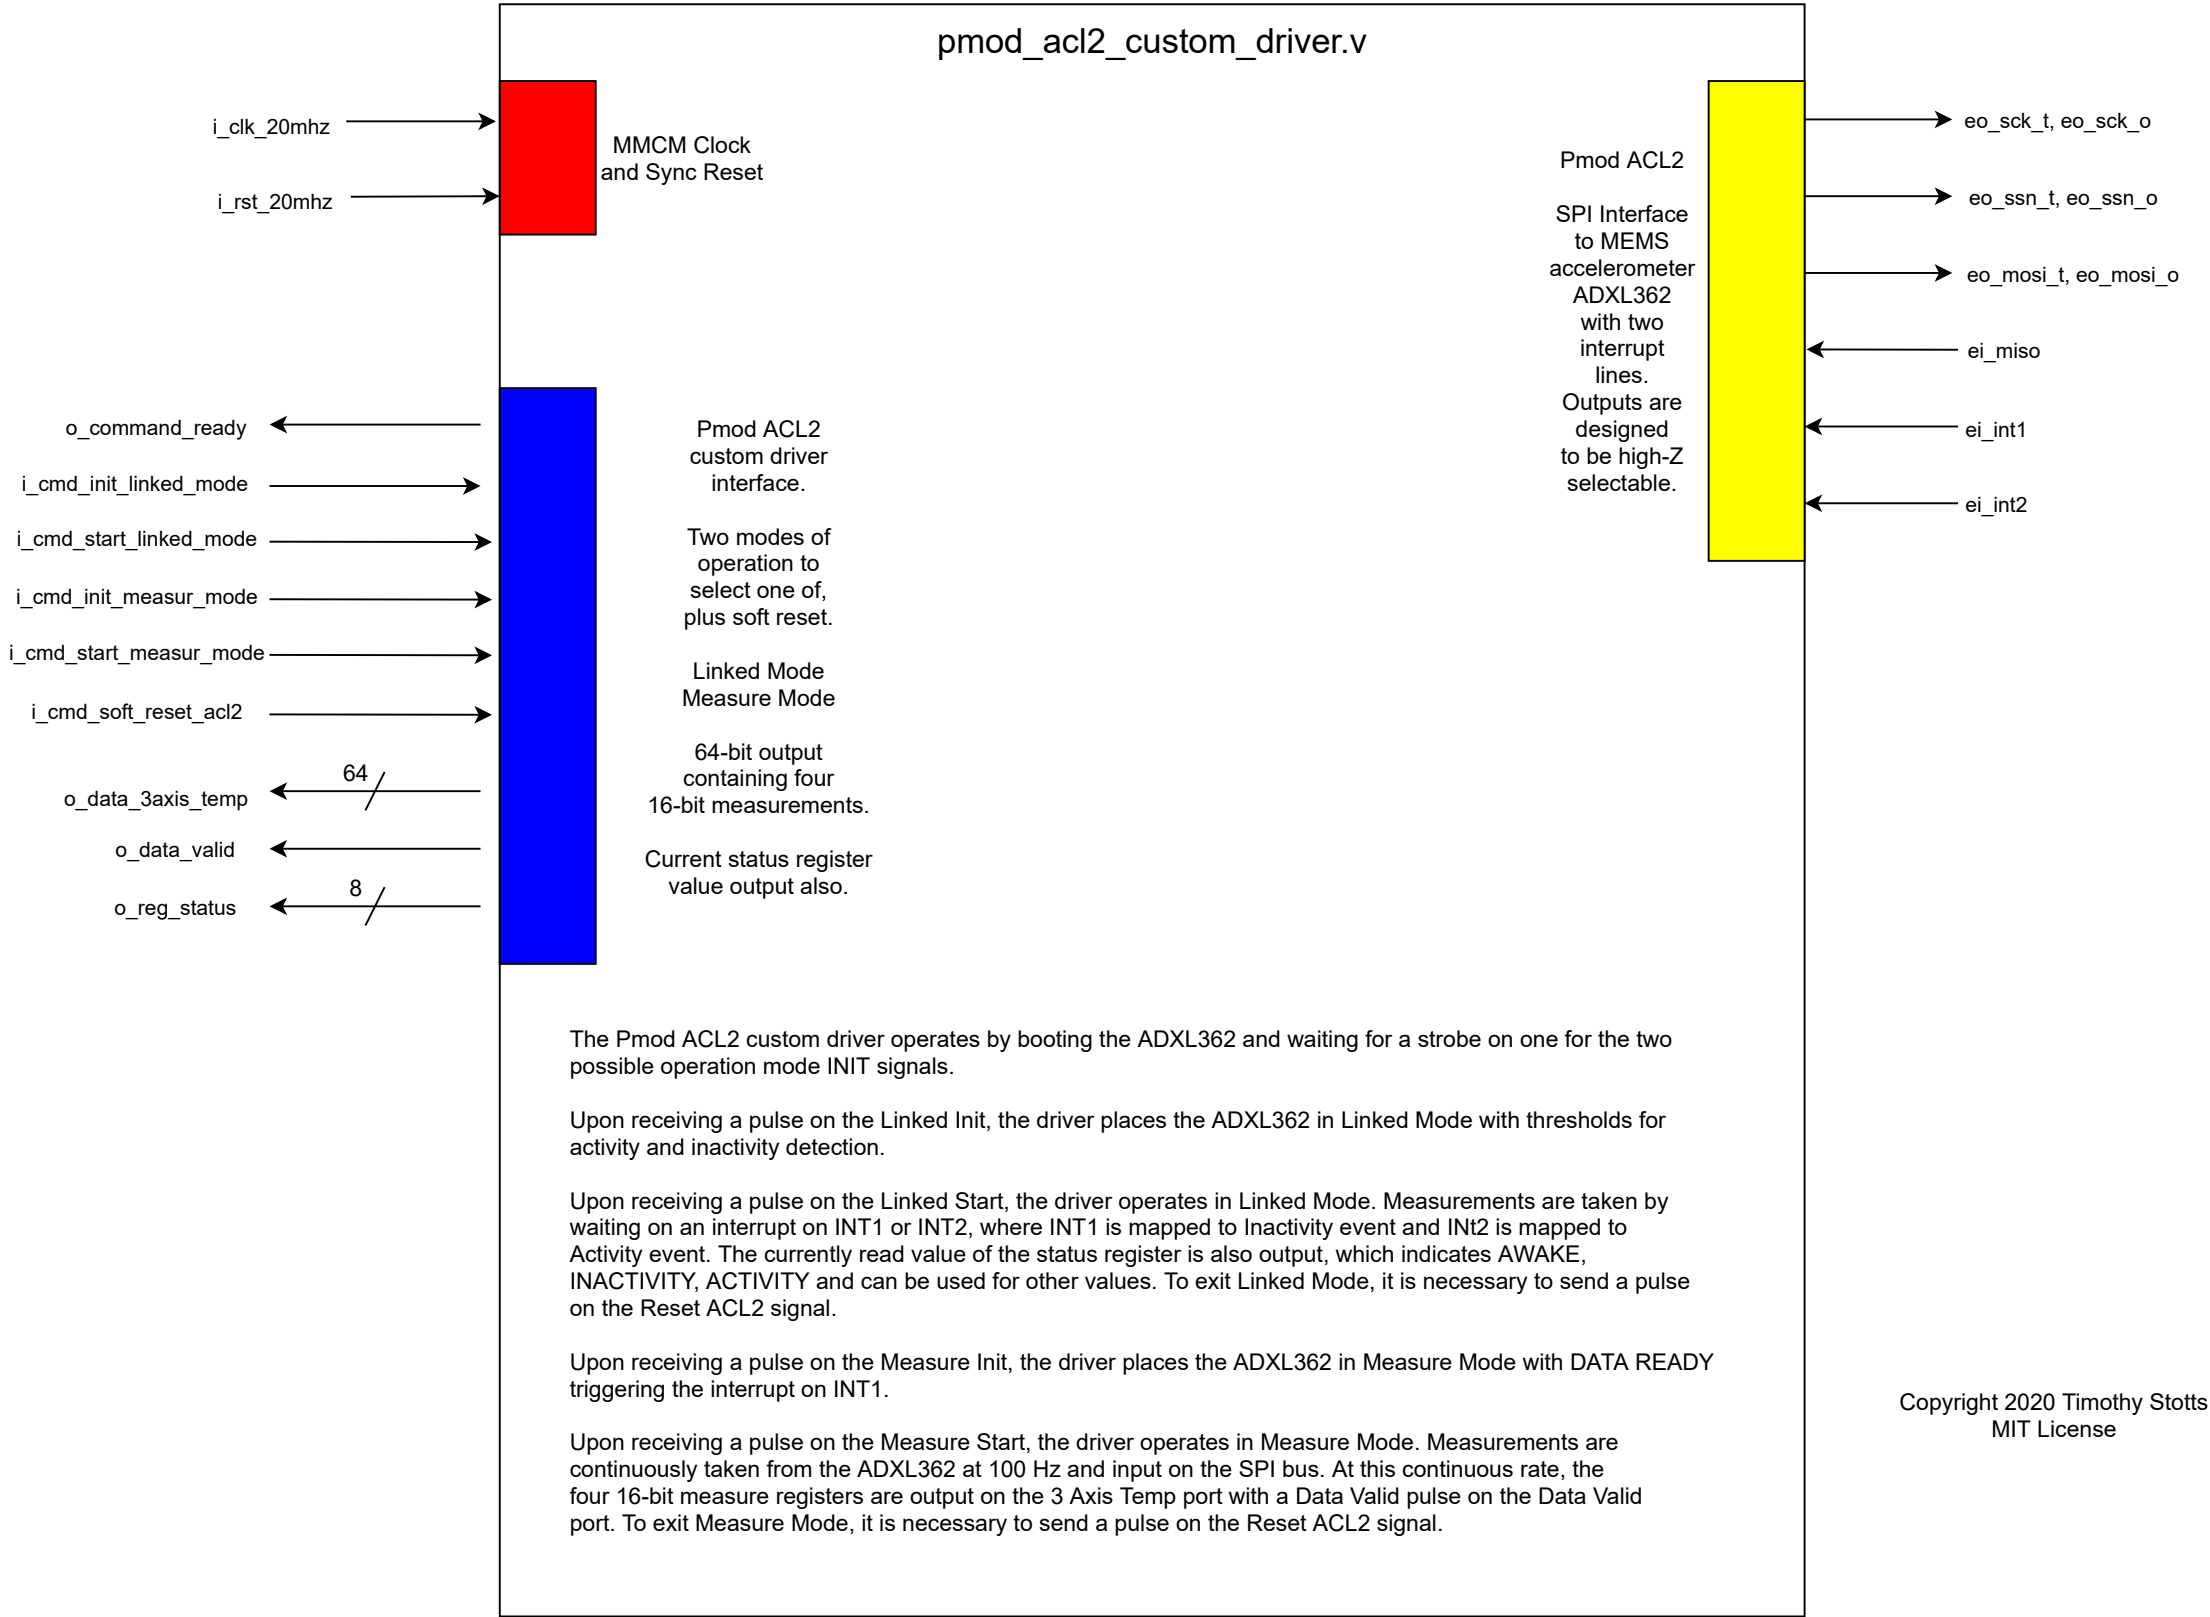

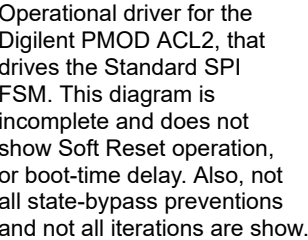


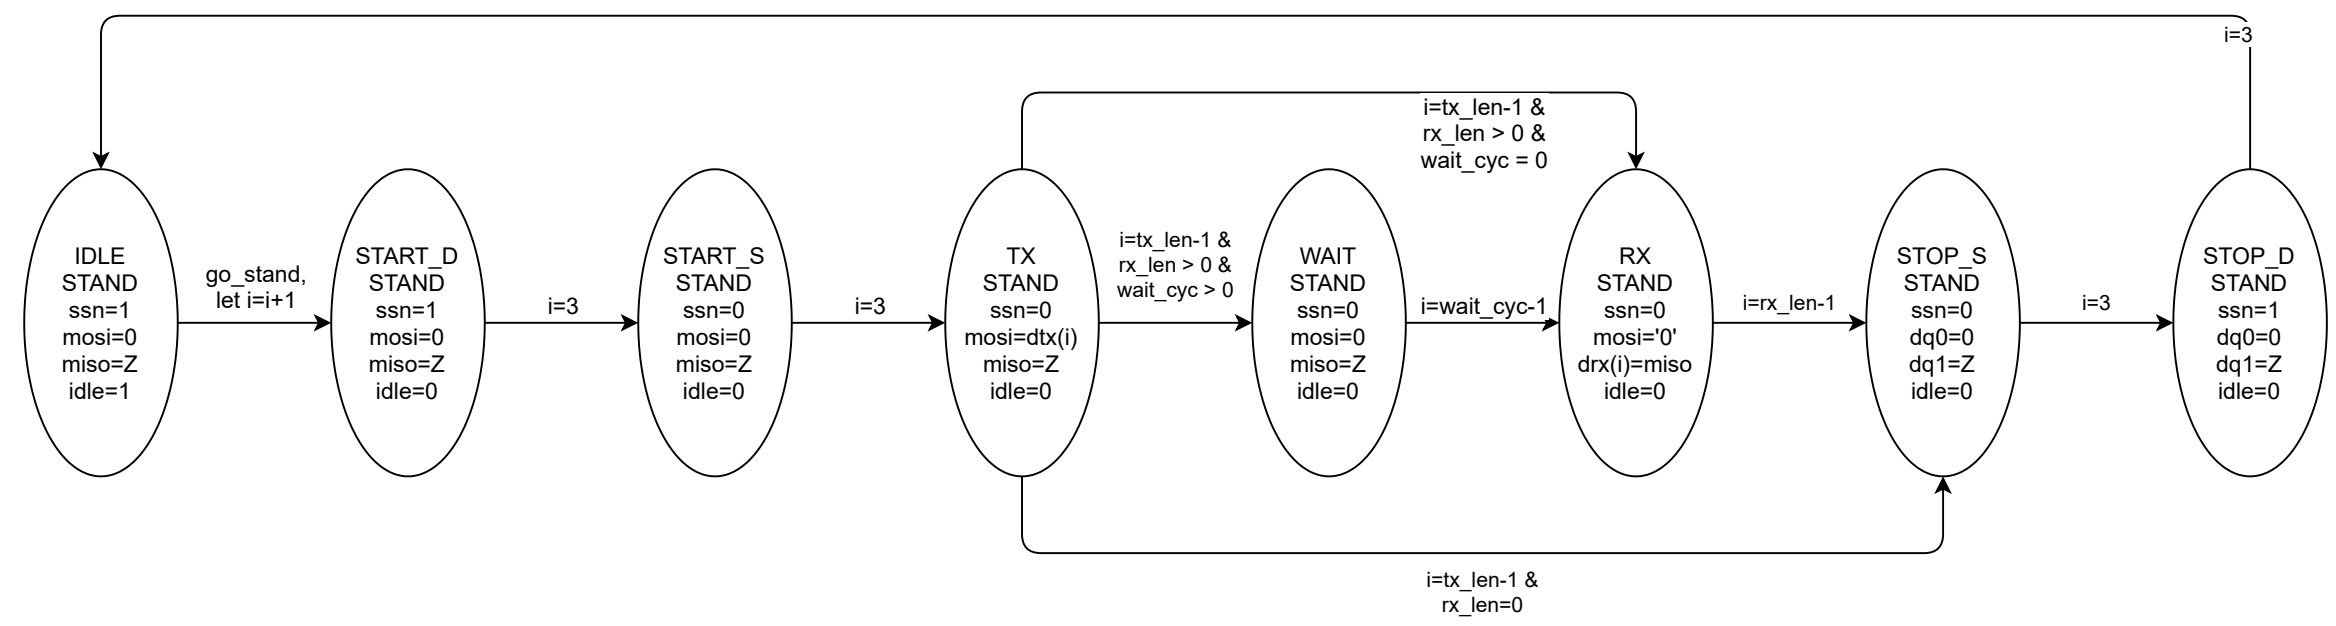


In each transition, tx_len and rx_len are to be multiplied by 8 from the FSM input signals, as it only makes sense to input into the FSM a byte count, while the FSM requires transitioning based upon a bit count.

Copyright 2020 Timothy Stotts
MIT License

Generic SPI FSM, with only one SPI slave on the bus.

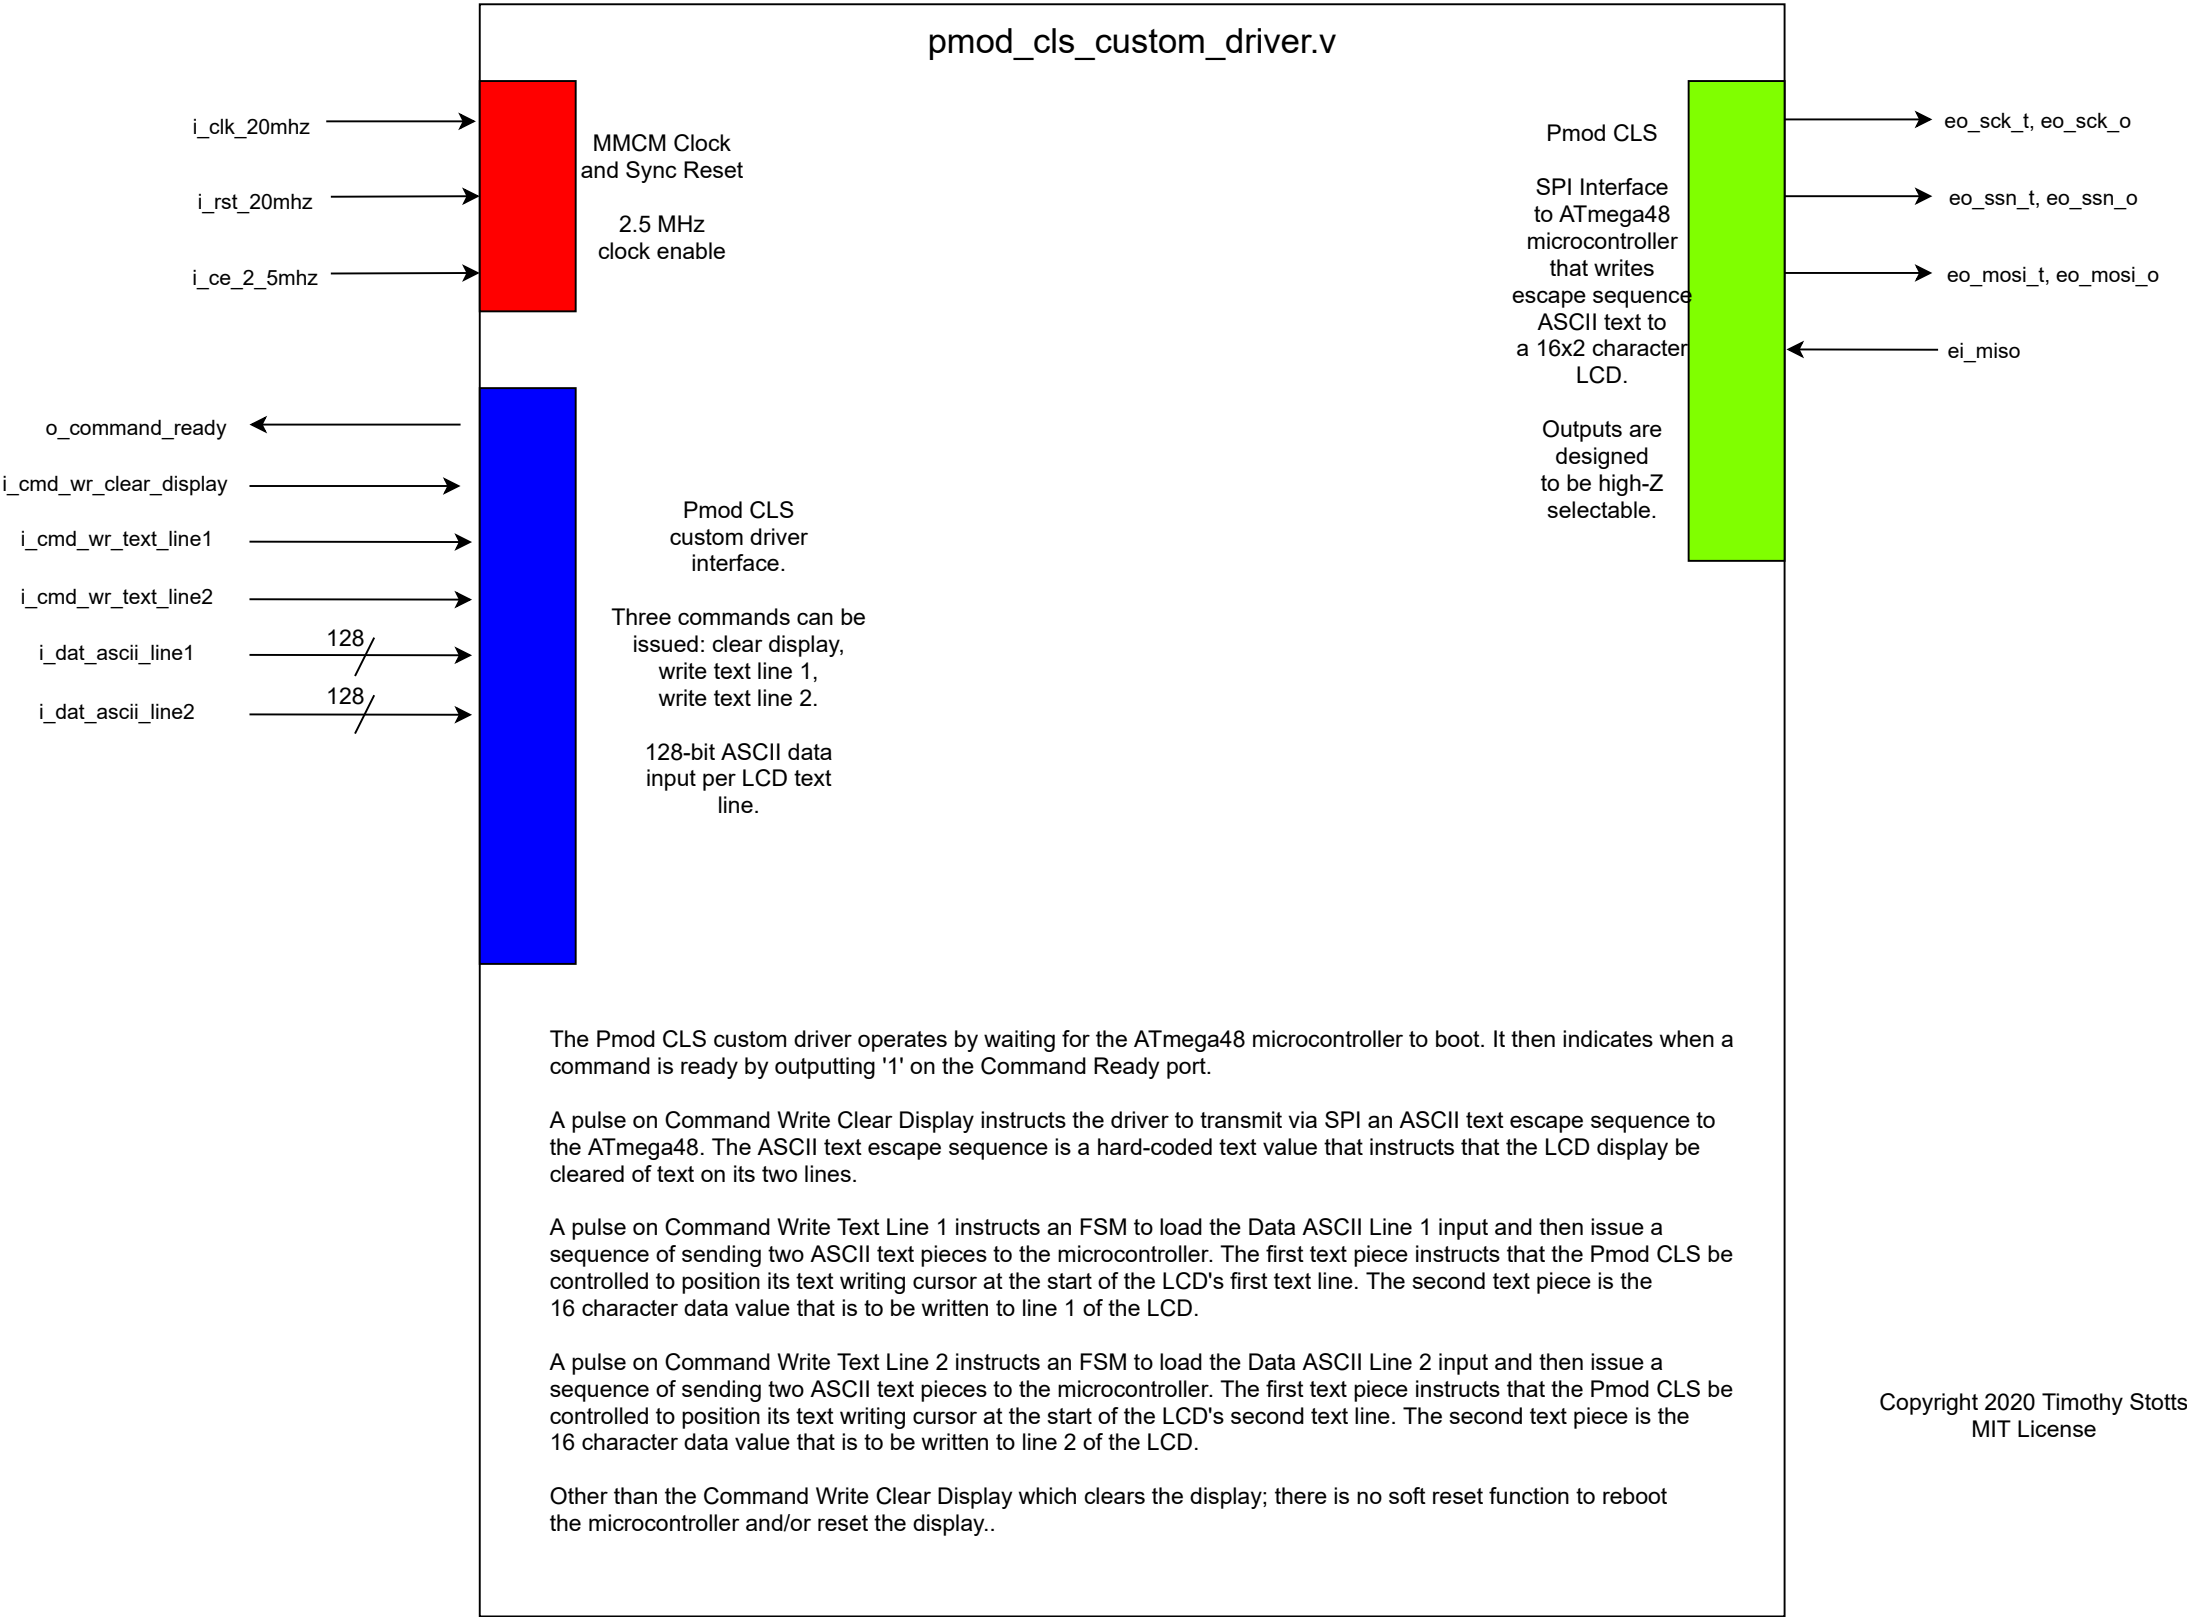


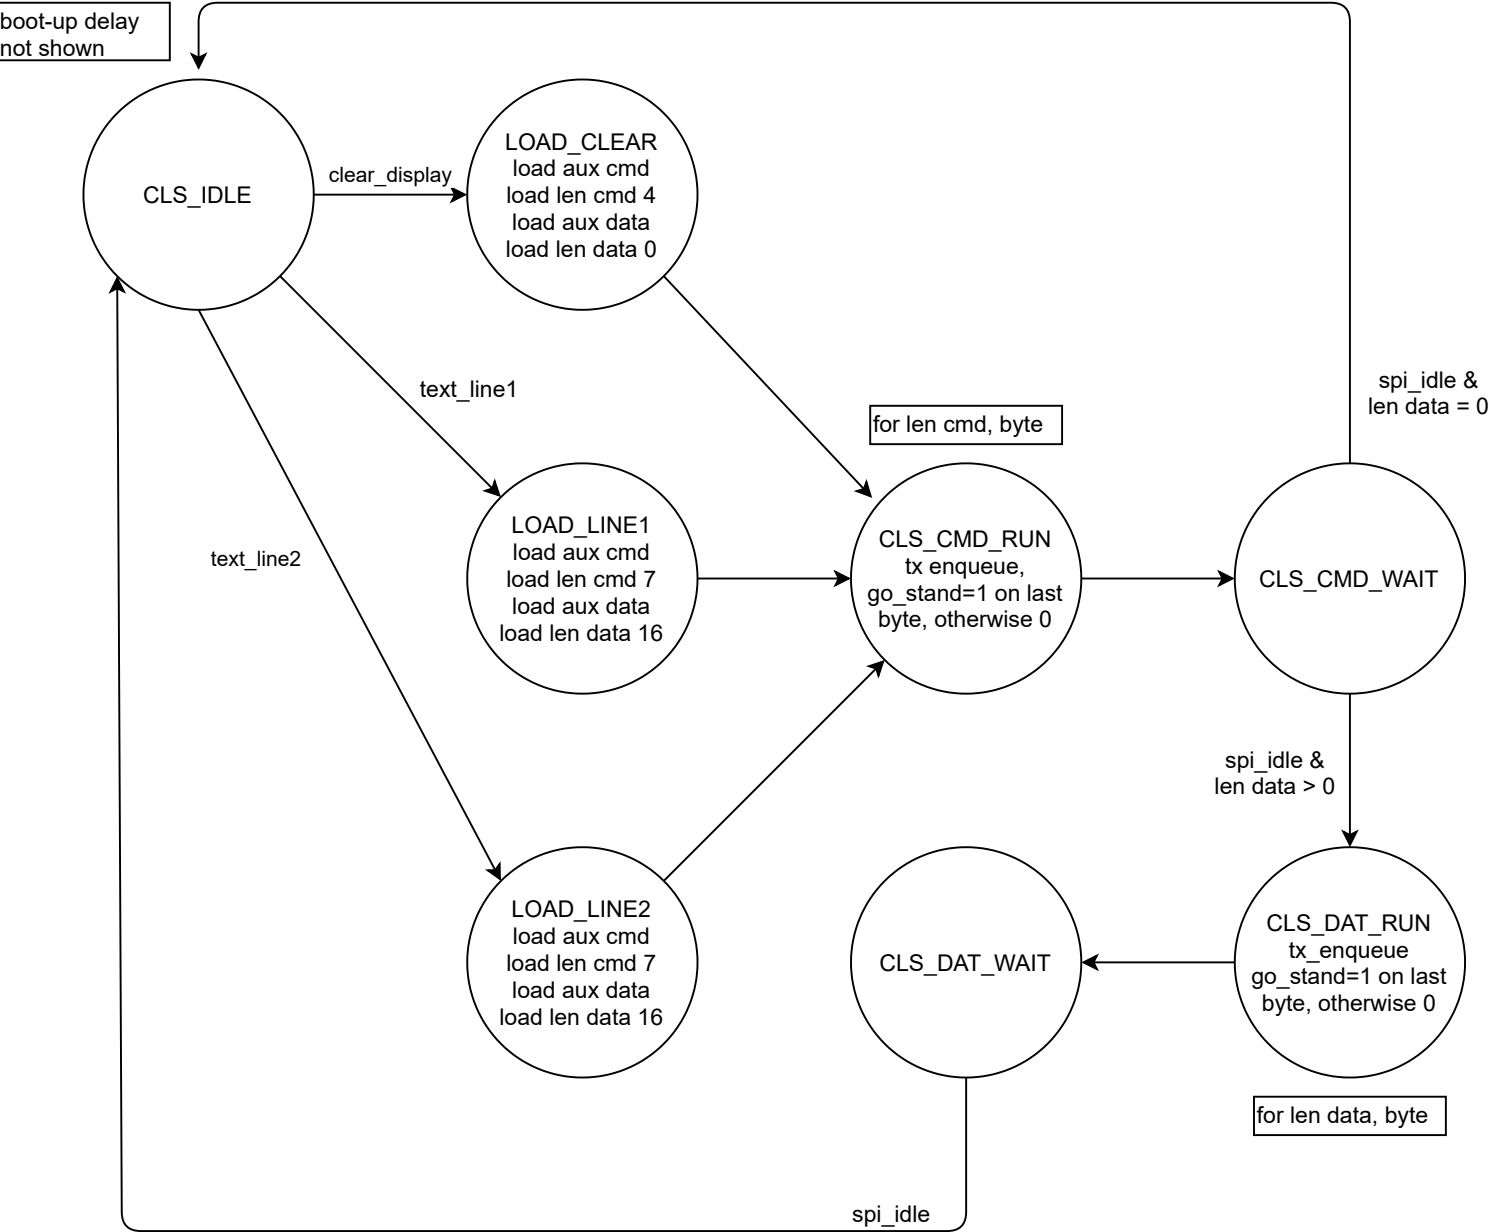


A FSM to operate the Digilent Inc. PMOD CLS LCD display communication via the single slave SPI-machine FSM of this document.

This diagram is incomplete and does not show boot-time delay. Also, some state-bypass preventions and iterations may not be shown.

Copyright 2020 Timothy Stotts
MIT License

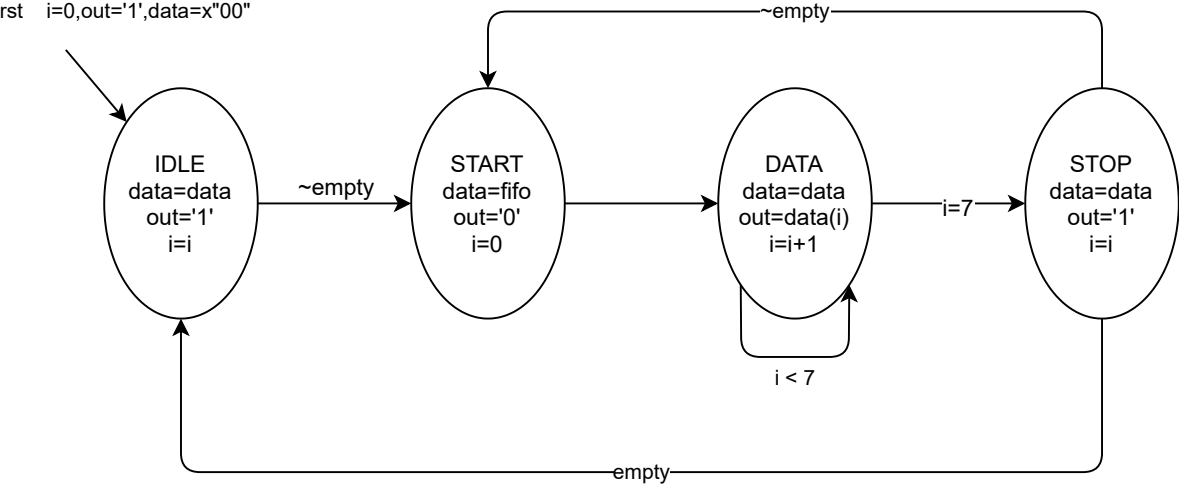

A TX ONLY UART output to UART chip from the FPGA, with the FSM executing at BAUD rate as its clock enable.

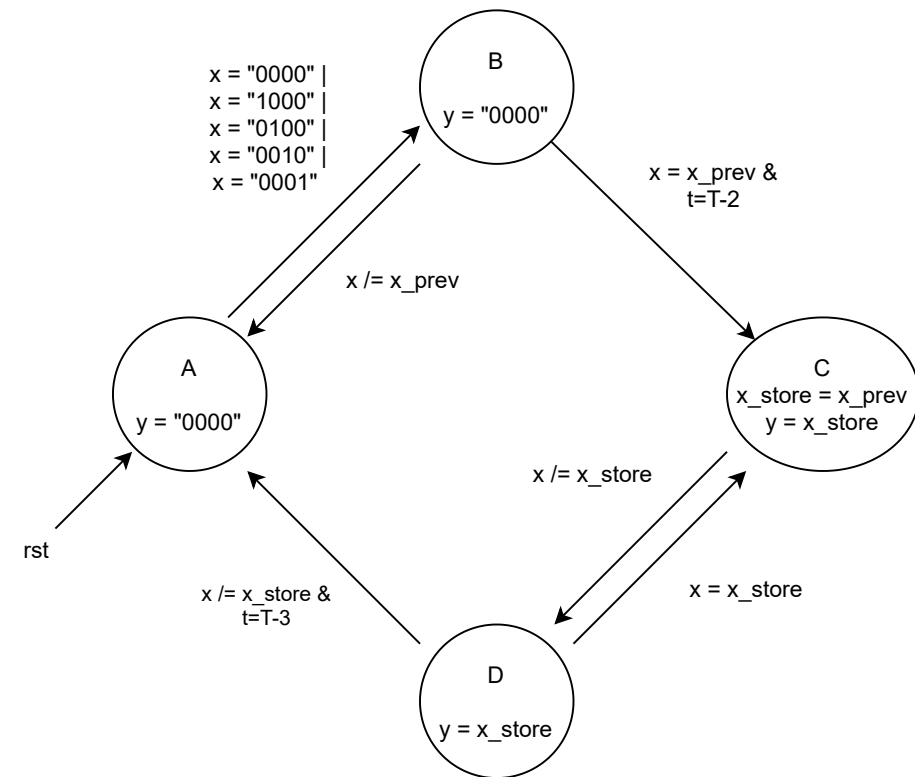

Full 4-button combined debouncer.

x is defined as a four-bit value.


x_prev is defined as a four-bit value that holds the previous clock cycle value of x.

x_store is defined as a four-bit value that holds the value of x and updates the debouncer FSM entered state C during the transition BC..

The registers x_prev and x_store could be combined into one register, with its capture of X being a clock-enable during transitions and states of a more complex diagram.

Copyright 2020 Timothy Stotts

MIT License. Refer to LICENSE
file included with this software.

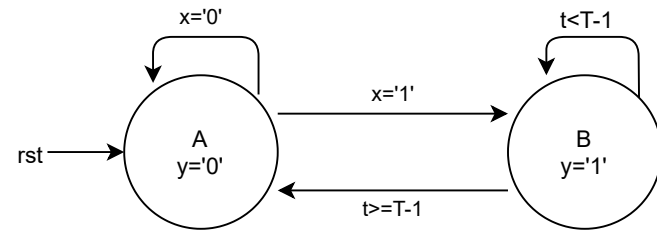

Moore FSM for a synchronous pulse stretcher of signal X that lasts for a duration less than T, with Y lasting exactly T cycles.

Textbook Figure 8.28. quoted from:

Finite State Machines in Hardware: Theory and Design (with VHDL and SystemVerilog)
by Volnei A. Pedroni,
reprinted courtesy of The MIT Press