



CLICKASURE® is a South African/Zambian based electronic and software systems development, and electronic systems manufacturing company, specializing in Access Control, CCTV and digital surveillance solutions, for its local and international market. The company has been developing solutions for the industry for more than 15 years, and has signIcant blue-chip customers across the region.

Mission Statement

Safeguarding your assets through certified security.....


We have intentionally subscribed to all security angles, at Clickasure we attend to both your biometric access controls, POS Terminal Units, CCtv, alarm control units and on some projects hard framed units such as safes and Locks.



Corporate Goals



Strong Client Relations and Loyalty Client Confidentiality Dedicated, Motivated Staff Reactive, Responsive and Proactive Corporate Social Responsibility

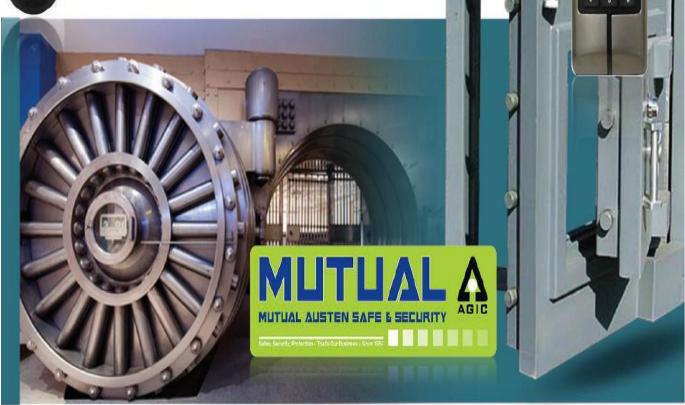

HIKVISION







MUTUAL




























Access Control & CCTv Product Series





Our CCTV Systems are reviewed on both the DVR & NVR tag mode. Given the nature of our product and service line we offer industry proven solutions to our clientele. In this regard we have always followed the ethos of effective and productive client follow-up routines within and after the installation process. Our Access control and Alarm systems equally align to this call. Amongst the products we are offering, below are the parameters.

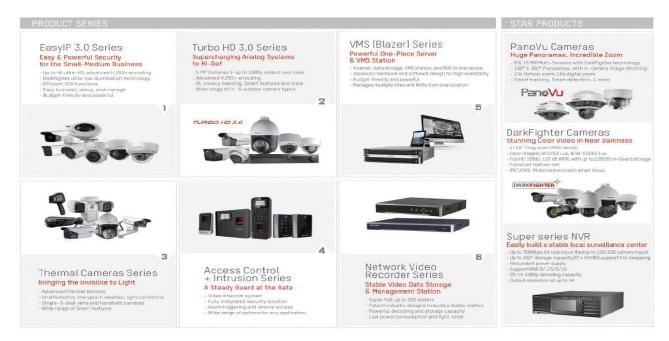





ACCESS CONTROL

INTRUSION ALARM & VIDEO INTERCOM

DS-K1104M(K)



CS- (1F900-F



E 850 Mfare 1 Non-contacting ICCard



DG-K4T100 Electric Bolt





Support Mifare Loard With keyped (DS-K)104MK) Supports RS485 and Wiegand (W2G/ W34) protocol, Temper-proof, Applied for 86 6 120 Gang Box

Optical fingerprint sensor designed with scratch-resistant material USB 2.0 communication standard for

dute transmission

DS-K4H2500

- Working fequency: 1356 MHz
- Long time data storage for 10 years
 Working Current: 900mA Startup
 Triple acceditation(S0) (EC 009798-2)
 Ownert), 100mA(Standay)

· Support Thrust of 800 Kg: · Polished and Brushed Stainless Steel

DS-K4H250S

Vandal Proof



Supports static linear thrust of 300kg

Working Curent: DC12/(510 mA) / 24/AC(250 mA)

Single -door Control



· Druble-Jose Central

Supports static linear thrust of

· Working Current: 12V/S00mA × 2



DS-K47100-11/2





0S-K4H250-LZ/U

· Aluminum alloy majorial · Suitable for fully frameless glass door · The door opens both sides at the angle of 180



· Arteris old real material with the The shall is hard arodit in:



netal button

3A@3EVCC Max



DS-K7PO3/04 ExitButton



DS-1/7FD5/06



DS-X7PER



Aluminum elloy panel with sendolast, · Panel: eluminum penel Aleady passed 500 thousand times sging fest
 NO/NC/ODM Contact

- · Alterdy passed 1 million times aging NI/NC/CIM Corted
- · 14@30VDC.0.54@129/AC
- · Brushed stainless steel penal, metal · Already passed 500 thousand times
 - aging test
 ND/NC/COM Contact 3A(8)3EVEC Nex
- · Suitable for exit door and emergency
- 3A@JEVIC Max

INTRUSION ALARM





- · PTSN 10/103Mbps Ethamet
- LED screen (DS-19408-F/K1) LCD screen (DS-19408-F/K2)
- · 1 relay output

DS-18309-D4F/KX(GX) 8 Zone Video Security Con



- LOD screen IDS-19908-04F/K21
- · 1 SATA interlace · 1 relay output, 14.5 VDC
- 4-ch990H analog video irput PTZ control LED screan (DS-19008-04F/K1)
- LED screen (DS-19308W-04F/K)

Support 4-ch IPC video input, Mec 25

- - LCD screen (DS-19308N-04F/K2)
 1 SATA interface
 1 relay output, 14.3 VDC

OS-19308N-14F/Kx(Gx) 8 Zone Video Security Contr





· PISN 10/100Mos Ethampt 4 rater output, 220 VAC

ACCESS CONTROL

INTRUSION ALARM & VIDEO INTERCOM

DS-19800-046(GX)





- · 4-ch 990H enalog video input
- · 1-ch VSA output, 1-ch HDM output
- 1 SATA interface 1 relay output, 14.3 VDC

DS-19X00-B(X)

- · Support 4-ch PC Aldeo Input, support
- FTZ Control
 1-ch VGA cutput, 1-ch HDM output

D3-19KDO-BL

- 1 SATA interface
 1 relay output, 14.3 VDC

D\$-1721FZ

· CLOAK WISETM arithmetic

Saeling optical system
 The R and microwave

DS-18M00-R0

• RS-ABS trigger extension module

Tempering-proof bracket



The zinc-aluminum alloy enclosure is

DS-17070R

- antistatic and anti-interference · The sensitivity is adjustable · Caramics sensor, with high temperature S humidity adaptation and
- · Function of low bettey and

VIDEO INTERCON





HIKVISION





- P Skintendant
- 109IP camera, 180° hald of view
 Supports connecting to the mechanical doorbell

OS-ABBIL12-IM wandal-prodivilla door station

podio plart



natwork(the keyped with model of FF)

• Prompts alarm with the indicators and

Operates on the security control penal throughprogramming
 LEO display, ISSAS interface





audin alad



accide aser • Operates on the security control panal through programming • LCD display, RS485 interface

- Suitable for Indoor station and villa
- HDvideo sun-alliance with WCR wide angle and high performance IMIS, up to \$8 x 10/100 Mbps portal 6-ch network cable powering and 2-ch case ad ng IAT
- · Buit-in 24 VOC voltage-stabilized switching mode power supply
- · Rinforfaces of RL-45, including six
- 22 · Prihole Cenera with 720*576 @ 25

DS-K#2411-IM

- Fps Video Intercom Commo Support Two Door Stations Cascading
- in Intercon System
 Uhlocking Controlling
 Self-adaptive R Supplemen

OS-NH2220 Indoor Station

display
Support ISAPI and DIWIF
IK 9 and IPGE

· Access control function Motion detection





- 7-inch LCD Screen
- · Video Intercan Communication
- Support Time Indoor Stations
 Coscoding in Intercom System
 Remote Unlocking
- resolution: 490 * 320
- Monitorine Door Station and External Analog Camera
 - Ethernet
- 3.5-inch Colonul TFTLCO, display
- Camera resolution: H0720P. 25tosPI/30tosIVI
 - 8-ch plarm input, 4-ch plarm cutout Visible Light Supplement
- - · 3.5-Inch Coloriul TFT LCD, display DX + OR4-milnloses

DS-KD8002-VN Metal Door Station

- Camera resolution: H0720P, 25tpsP() 30tps(M) 10M/100M/1000M Salf-adaphya
- Ethamet


 8-ch elem input, 4-ch elem output · Visible Light Supplement
- DS-1081/2/402-14



- · Camarar esolution: H0720P. 25/ne[F] / \$16ne[N]
- 2 Spay y supayy 10M 100M Salt-adaptiva Ethamat 4-ch alarm input, 1-ch alarm output 19 65 and 19 Supplament
- 1/2/4-ch Indoor station access















OS-7204/08/16HGH-F1 OS-7209/16HGH-F2 7209 11 Tubo NO DVR



- 4/9/16- ch HD TV/AHD/analog cameras video Caudio
- HD-W/analog/#4D/P camera quadruple bybnd HD-TVI and analog comeras self-adaptive access Up to full channe@T20P resolution real-time
- acording r HDM and VSA output at up to 1520-1090P resolution
- Long harsmitelan defence over coex rable Front penal and dam VD optional 1.3ATADS 7214/09/ISHAH-E1/2 SATADS-7204/14424-621, 2.0592.0
- 08-7264/08HUHF F1/N IMP IU Turbo HO DVR

OS-7204/ OBHIHI-F2/N 34P 3J Turbo HOOVS



- 4/8-ch wdeo 5 1-ch audio Input HOTVI analog/AHD/IF camera quadrupla hybrid 19ps recording at 3MP
- Full channel recording at 1010Presolution HBMI output at up to 1920 x 1080P resolution(D).
- 1204UH-F1/N, support 0/85 output 48 UHD output (05-7108kUH-F1/N) Long in arremission distance over coax cable Front sand and distance over coax cable
- Front panul and elem (/) optional 1 SATA, 1 USB 2.052 USB 3.005-7208HJHI-F1/NJ
- 15 to recording at 3MP
 Full channel recording at 1080P resolution · HDM adput at up to 1926 x 1090P resolution(DG

· WW15, chyldro J. Lich audo irout

0S-720A/08/L6HQHH-F1/N 1090P 10 Tubo IO DVR

· 4/1/16-ch HD TVI and og/AHD cameras

HD TW/analog/ARD/IP cursus hybrid

Full channel @72IP resolution real-time and

1980P non wal-time recording + HDM and VGA output at up to 1920+1990P

Long framsmission distance over coax cable
 Front panel and elem I/O optional

20022000000 Ø

+BTV// snelog/AHE/IP camers quadruple hybrid

H.254+ vidao compraesion

nachton

+ 1 9ATA, 2USB 2.0

- 7204HH-F2/NJ, support CRBS output

 * 4K URD output (DS-7.296/16HH-F2/NJ)

 * Long framemission distance over coax cable
- Front panel and plarm V Copilonal
 2 SATA, 1 USB 2.0 42 USB 1.00S-7208HUHL-F2/M

CS-7201/18H0HI-F2/N



- 8/15-ch HD TW/analog/AHD cameras video6 audio
- HD-MI/anslog/AHI/IF camura hybrid
- H.254+ rideo compression
 Full channel@720P resolution real-time and 1060P
- non read-lime recording + HDM and VSA output at up to 1920+1992P resolution
- Long trinemiseion distance over soex cable
 Front panel and slamml/ 0 optional
 2 SADA, 2 USB 20

05-7204/06/13H6HFSH 1080P 10 Turbo HD DVR



- VB/16-ch ND TV / enalog camar en vida of eurlio input
- 40-1/1/analog/P camera hiple hybrid
- FD-1/1 and analog cameras self-edeptive access
 Full channel (0720Freedution real-time and 1910P no real-time acording

● DS-7304/01/18/24/32H6HI-SH

- + EDM and VSA output at up to 1920+1990* resolution Long transmission disfance over coar cebbs From penel and alarm Y0 optional
- 2 SATA (CS-7210HGH-SH) 1 SATA (720 V 09HGH-SH), 2

DS-7244/ DB/18HQH-SH Full 1090P JU Turbo HDDVR

d correct

- 49/18-ch H0 TV/analog camaras vidao6 audo input + 4/12 18-ch vidao 6 4-ch audo input + 40-TN/analog/IP camara triple/tyb id + 160-TV/analog/IAHI/P camara quadro
- HD-TVI and analog cumeras self-adaptive access
- Full channel (8 1990) resolution real-time recording HEMI and VGA output at up to 1920-1990) resolution
- Ling transmission defence over crax cable
- Front pared and slam I/O optional Long transmission distance over oce 2 941405-7209/1640H-SH/1 9414/728440H-SH/2 4 SDD, 1 6SAR, 2 USB2.0 gigabit NC

05-7304/08/16HQHI-F4/N 10909 13U Turbo HD 0V9



- + HDNV analog (AHI) /P camera quadrupla hybrid Full channel recording at 10/0P resolution . HOM output at up to 1920 x 1980P resolution(DS-
- 7304 0840H-F4/N), support CV85 output 4K UHD output (DS-7316HQH8-F4/N)
- · Long hansmission disharca over coax cable

V 8 16/24/32 ch I/D TW/snalog cameras

- ideoSaudio nput HD-MYanelogiP camera hiple hybrid
- HD-TVI and analogic energy sulf-adaptive access
 Full channel @7259 resolution real-time and 10009
- + HDM and V-SA cutput at up to 1920 + 1080P repolation
- Lang transmission distance over coax cable
 Riguist network interfaces
- + 4 SATA 1 + SATA 30582.0

06-8L04/01/18/24/32HGHI-SH 1000F2UTurbs FO DVR

DS-7314/ D8/18HUH-FW N IMF1 DJ Tubo HD DVR



- 4/8/15-ch+E-TV/analogosmens video 6 audio input + 4/1/16-ch video 6 audio input
- HEIVI analog/XHO/IP cenera quadruple/hybrid Full channel XHP sectultion recording at 15 the Up to 5/19/18-ch SHP DIME conformant IP cameras
- riput W. (3840 + 2300) (HD output
- Long fransmission distance over coar cable Supports POS Inggared recording and POS information availary
- 4 MATA, 1 45KIN, 1USB 3.6 8 2 USB 2.6

@ 03-6104/08/18H0H-F8/N



- HDM/ analog/AHD/IP camers quadruple hybrid
 Full channal recording at 1040P resolution
 HDM output at up to 1920-1090P resolution(IDS)
- 8104/084QH-FE/M, support CVBS output 4K UHD output (DS-8116HQH-FR)N)
- Long hanemission distance over coax cable * 8 SATA, 1 «SATA, 3USB2.0, gigebit MC
- ₩ 9 16/24/32-ch HD TW/snalog cameras
- videoSautio riput + HD-MV anelogiiP cemera triple hybrid
- HD-MI and analog cameras salf-adaptive access
- Full channel@720P resolution real-time and 1990P re-real-time recording
 HOM and VSA output at up to 1920=1090P resolution
- Long frammission distance over coax cable
 Dud Ggabit natwork infantaces
 8 SATA, 1 e/ATA, 3 USI2.0

TURBO HD DVR & KEYBOARD

DS-8104/ON/18HUHI-F8/N







- 4/8/16-ch-ID-M/snalog cameras video 6 audio input
- HDTM/enelog/AHD,IP camera quadrupia hybrid
 Full channel 39P resolution recording at 13-tos
- · Up to 6,10,18-ch IMP IMF conformant IP canarias
- irput + 1K (384) x 2160) UAD autput
- Long transmission distance over coexceptia
 Supports POS triggered recording and POS trigmetion

349 JU Turbo HOOVA

- · R SATA 1 «MATA 1 USB 10 L 2 USB 2 O

- 48/16-ch HD-TW analog comerae video E sudio input
 100V analog/AHD/P camera quadrupla hybrid
 Full channal 3MF resolution recording at 15 fps
- lp to 10/18/32-ch BMP DWF conformant IP common 4K (3940 + 2960) UHD output
- Long transmission distance over coax cable Supports POS triggered recording and PISS information
- Suel Sigabit ne Arcok Interfaces
 SAR, 1 e SAR, 1 USB 30 6 2 USB 20

DS-7604HUHI-F1/N & DS-7606/16HUHI-F2/N DS-7804/01/18HI-ST



- · Vo to 9/16/32-ch Andosvideo « Prideol Irout
- HDT/V snelog/AHD/IP cemera quadruple hybrid
 Full channel 3MP resolution recording at 15 tps
- · Us to 94P resolution if video recen
- HDM and VSA sulput at up to 1900 x 1090P resolution Long framemission distance over coax cable
 Front panel and alarm U0 optional
- 1 SATA, 2 USB 20(0S-7804HALFL)N + 2 SUA, 1 U/B 20 6 1 USB 3 0DS-7608/19HU4-F2/NI
- lp to 8/16/12-sh (Analog ridso + IP video) input 1,254 Sidual, steam video comos
- Up to SMP resolution (Pvideo recording
- Third-parly nativer's cameras supported

- Full channel@4CF rest-time snaling videores
- HDM output at up to 1920+1000P+easiution
 1 SATA(DS-7604H-ST) 2 SATA(DS-7608/16H-ST), 2
- Full chamal@1390+729P resolution real-time

 - HDD quote and group management
 8 SATA, 1 aSATA, 3 USB2.0

05-7304/00/19HFHI-ST)-SL)



- · Full channul (9:1922, 1090) resolution real, time

- HDD quota undgroup management
 4 SAR, 1 eAR, 3 USB2.0
- · WW16-chHD-50lvideoSaudo Irpul • X 264 E dual-streem video compression
- recording-ST series Full channil@1290+720Freedulionreel-time
- recording(-St. series)

 HDM and VSA output at up to 1900+109EP resolution

 Sigsbit network interfaces
- 10.1" capacitive touchscrean with 1024-900

D5-1600KI

Natwork Kayboard

- Touchscrean and joystick datachable
- Digrigy Witcomedia
- PoE power supply External vidao play via USB interfeca
- 4DM, DNI output
- Emergency event recording and picture capturing
 Video wall control window division, screen splicing, cross-windowvideo roaming

- · Vidas wall central
- Up to 251 analog dimes by R5-485 connection
 Compatible with Hikinson IP cameras, DV9/MR,



DS-1005KI



- ISBHID protocol · Power supply and communication by USB port
- discity . PTZ control: sell and call the preset, patrol and
- pattern IVR/WR manucontrol · Conpetble with clant software and slatform

DS-1200KI



- 129/64LEE dot matrix screen
 PTZ and TV wall control
- · 4-asia joyatck






· 128x64 LED dot matrix scream + PIZ and N vali control 4-axis joystok















scftwara:



Ny stem upgrade and import / export of configuration files by USB-facts close

Network access and configuration by Web browser support



OS-9814/08/18HF1-ST)-RF) Full ACE 2UHAARDOVR

- · Up to 8/16/32-ch (Analog video + P video) input
- Full charmalifo 4/F real-time analogy (decreaseding Us to SMF resolution IP video recording Third-party network cameras supported
- HIMI and VGA output altup to 1920, 1090Presolution
- 85A%, 1eS/JA, 3 USB20 *-RT series support RAGO, L, S, 10

DS-8104/08/18HFH-STI-SLI



- toniology (Public Park of the 2019) H2646 dual-sheam video compression
- · Full charmal@1920+1090Presolution real-time
 - reording(-SL series) · HIMI and VGA, output a tup to 1920 x 1990 Presidution · Dual Rigabit network interfaces





- 7" TFT touch sceam with 910+490 resolution · Live view and videoples back
- 4 axis joystok · Maoro commané oparation













POS Standard and Biometrics- Product Series



The critical notables under this product line are the certification provisions from the product manufacturer which must be in line with the PCI Standards and overall must subscribe to the Card and EVD Modules. Amongst our product codes the TPS900^ Proves to be the highest graded units followed by the Aratek Modules. We offer project designed modules based on client specifications. TELPO-TPS 900

This Unit has proven to be a reliable technical partner for financial inclusion in Africa. Currently it ranks amongst the top 5 in terms of reliability and technical agility. Countries were its success has been louded amongst others are india, Kenya, Burundi, and Mozambique just to mention but a few. The unit comes with all the certifoication parameters.



KEY FEATURES

A7, Quad-core 1.8GHz processor/A7, Quad-core 2.5GHz processor- Grade Marshmellow 2



- 2GB RAM, 16GB FLASH, Ext. TF(micro SD) card memory 4GB RAM, 16GB FLASHOS
 - Android 6.1 1280*720KeypadSoftkeys
 - Paper width: 58mm .Thermal graphic printer
 - Track 1/2/3, bi-directional swipe Φ35mm -Magnetic card reader
- ISO 7816Contactless card reader, ISO7810, ISO7811, ISO7812 Smart card reader
- ISO14443 Type A/B, ISO18092 Fingerprint scanner o ANSI/INCITS 378, ISO/IEC 19794-2, ISO/IEC 19794-4
 - FBI, STQC certificateIriso STQC certificate
 - 5M Pixel, auto focus (Barcode software decoding) camera
- ISO7816, 1 or 2SIM Slots 2 SIMs 1 SIMCommunications, SAM slots
 - FDD-LTE/TDD-LTE/WCDMA/GPRS/WiFi/BluetoothGPS
 - Digital audio speaker
 - Power SupplyInput:100-240VAC;output:5VDC, 2ABattery
- 7.4V/2200mAh o 7.4V/4400mAh, Lithium Polymer rechargeable battery
 - Weight450gDimensions(mm)205(L)×82(W)×55(H)
- Certification -CE, EMV L1&L2, EMV Contactless L1, PCI, RoHS, IP54MDM (Mobile Device Management)o
- Standard OptionalReserve the right to change the parameters without prior notice.







High-speed Printer 2-inches thermal high-speed printer







Basic

Operating System	Android 8.1 or Android Go		
Processor	Quad-Core 1.3GHz		
Memory	2G RAM + 16G ROM		
Display	5 Inches 720*1280 Pixels IPS LCD		
Camera	8 MP Auto Focus (Rear)		
SD Card slot	Up to 64G		
Printer	2 Inches Thermal Printer		
Battery	10000 mAh/3.7V Hi-Performance Li-ion		
Adapter	DC 5V/2.4A		
Temperature and Humidity	Operation: 0°C~45°C, 10%~75% Storage: -20°C~50°C, 5%~85%		

Communications

3G WCDMA	Support		
4G FDD-LTE & TDD-LTE	Support		
Wi-Fi / Bluetooth / GPS	2.4G Wifi, BT 4.0, GPS/Glonass/A-GPS		
SIM Card	Micro SIM Card *2		
PSAM Card	PSAM Card *2		
USB	USB 2.0 *1 & Micro USB (OTG) *1		

Certification

Certification	CE, FCC
	,

Others

Weight	585g
Dimension	210*85*90 mm

Cynovo PR6



Dubbed the friend to supermarkets- the PR6 is slowly penetrating the market. Currently it is fairing well on the European market with a few certification issues on the African market. The unit prides for all the reviews but has one setback — the exclusion of a fingerprint reader.



Clickasure has been delivering Point-Of-Sale (POS) solutions and proposals on biometric access and review. Currently most of our POS application reviews and submissions are used to register sales and handle bank transactions. The application must perform in real-time to meet the demands of both cashiers (in need of a responsive system) and customers (demanding fast and accurate service). Over the years we have realized that Touch screens are becoming more common in POS solutions and Clickasure is pioneering in the development and appreciation of the touch screen interface for their POS application. With knowledge of touch screen interaction, unnecessary design mistakes can be avoided. This will help making our products and services more competitive on the market.



We offer the following:-

BURGLARY SAFES, VAULTS AND STRONG ROOMS

Sales of Safes, Vaults, Strong Rooms and Respective Doors to client's specifications Reconditioning

Open, Installation, Service and Maintenance

TIME DELAY LOCKS (Industrial, office and cash centres)

Sales and Support Installation, Service and Maintenance

FILING AND STORAGE SYSTEMS

Sales and Support Service and Maintenance Fire Proof/ Spillage Proof Cabinets Mobile Cabinets



ACCESS CONTROL SYSTEMS

Access Control Booths, Pay Windows, Anti- Bandit Doors Sales and Support Unlock/Open ATM Locks, Service and Maintenance of ATM Locks

OFF-SITE ATM CUBICLES

Sales and Support Service and Maintenance

BULLET RESISTANT DOORS/GLASS

Sales and Support Installation, Service and Maintenance





Summary

As a determined player in the market, Clickasure has got potential to compete with the industry giants upon more acquisition of prospective market. We therefore take this opportunity to thank you for considering us and we look forward to a great partnership we shall have. We thank you for your valued support.



GUT & MAS CONTRACTORS, IQRAA BOTSWANA, MASA MANUFACTURING, POSEIDON GEOFIX, GABORONE GOLF CLUB, THE EARTH GROUP, THE REDDY GROUP, TKM ENGINERING, TJ MOTLOGELWA, KINGSLEY AND ASSOCIATES, JUDICIARY COURT ZAMBIA, MEDISON INSURANCE AND FINANCE (ZAMBIA) ALUMINIUM 2000, ARCHITECTS INTERNATIONAL BOTSWANA, FAIRDEAL SHOPFITTERS, FLASHBRIGHT, FORTMA BOTSWANA, INDOCHINE DIAMONDS BOTSWANA, JOES ELECTRICAL, OKAVANGO DISTRICT COUNCIL, THARI BUREAU DE CHANGE, QUEENMEAD ENTERPRISES, ELEPHANT PROJECTS, SIMSAGAS, MOKOKA TRANSPORT

Our Clients in Zambia

- First National Bank
- Barrick/Lumwana Mines
- Zambia Army- ATM Units
- Precise Products Zambia Limited
- Jumbo Stores-Zambia

 Irish Embassy/ Security Door Supply and Installation
 - World Bank
 - Legit Stores
 - Sterns
 - Mr. Price



COMPANY CERTIFICATIONS





Centurion Systems (Pty) Ltd Unit 13 Northlands Production Park Epsom Avenue Northriding Johannesburg South Africa 2162

28 June 2017

To whom it may concern

Ref: Authorized Dealer of Centurion Systems (Pty) Ltd

This note serves to confirm that Clickasure Technologies Ltd in Lusaka, Zambia is an Authorized Dealer and Systems Integrator of Centurion Systems (Pty) Ltd wide range of products as well as the FAAC range of bollards and automatic doors.

Should there be any need for further clarity required on the same, please feel free to contact Centurion Systems Pty Ltd, Exports Department or alternatively visit our website www.centsys.co.za

Kind regards,

Lester Mamanyoa

Exports Administrator

Tel: +27 116992516

E-mail: lester.mamanyoa@centturionsystems.co.za



Centurion Systems (Pty) Ltd
2001/030056/07 | VAT No.: 4950101115
Unit 13 Northlands Production Park, Intersection of Epsom Ave & Newmarket Road, North Riding, Johannesburg, 2162
PO Box 506, Cramerview, 2060, South Africa
Tel: +27 (0)11 699 2400 | Fax: +27 (0)11 704 3412 | Email: info@centsys.so.za | www.centsys.com

Directors: (South African) Patrick John Dickens, Richard John Rohman, Nicholas John Dickens (Italian) Andrea Moschetti, Andrea Marcellan, Jacopo Malacarne, Ezechiele Galloni





























International Time and Access Technologies CC trading as ITATEC

DISTRIBUTORS OF TIME AND ACCESS CONTROL EQUIPMENT AND SOFTWARE

116 Johannesburg Road LYNDHURST, Johannesburg PO Box 29166 Sandringham 2131

Phone (011) 264-0530

CERTIFICATE

Clickasure Technologies Zambia are resellers of the Itatec range of products, including the Anviz biometric readers and the Clockwatch software system.

Itatec provides them with ongoing training as well as warranties and full support on these products.

Vivian Taback CEO

16th August 2018





Member: V Taback



Head Office 325 Zasm Street Waltloo Pretoria 0002 South Africa P.O. Box 35641 Menlo Park 0102 South Africa Tel: +27 12 803 6051 Fax: +27 12 803 8677 email: Infogmutual.co.za Website: www.mutual.co.za

TO WHOM IT MAY CONCERN

It is with great pleasure that I hereby confirm the appointment of Clicka Safes and Locks (Z) Ltd in a joint venture with Tendi Safes & Locks as dealership agents for the EMEA a division of the Mutual Safe Group with effect from 1st June 2016.

EMEA in conjunction with Tendi Safes will supply Clicka Safes and Locks (Z) Ltd with all the necessary support to promote the Mutual Safe Group's products in Zambial Being an agent for the Mutual Safe Group means that Clicka Safes and Locks (Z) Ltd will get the full support of the Mutual Safe & Security Group!

Yours faithfully

Director

EMEA a division of Mutual Safe Group.























REFERENCES

CONTACT NAME	COMPANY DETAILS	PROJECT SCOPE	CONTACT DETAILS
Mr.Maseka Douglus Procurement and Operations	First National Bank	Access Control, Time and Attendance, CCtv Surveillance and Alarm Systems	E:douglas.maseka@fnb.co.za C: +260 964266115
Mr.Robby Silwenga Operations and Technical Manager	Ab-inbev/Zambian Breweries	Access Control and UPS Units	E:robby.silwenga@zm.ab- inbev.com C: +260 9761958322
Lester Mamanyoa	Centurion Systems	Automated Gates, Sliding Doors and Bollards	E:lester.mamanyoa C: +267 71 537 096
Mr. Munyaradzi Gambe	Mutual Safes and Locks	Safes and Locks- Zambia, Zimbabwe and Botswana	E:munya@thendisecuritygrou p.com C: +267 71 537 096
Mr. Guydon Chipasula	World Bank-Zambia	Access Control & CCTV	E:gchipasula@worldbank.org C:+260 976 770788



