



## PROFILE VIEW

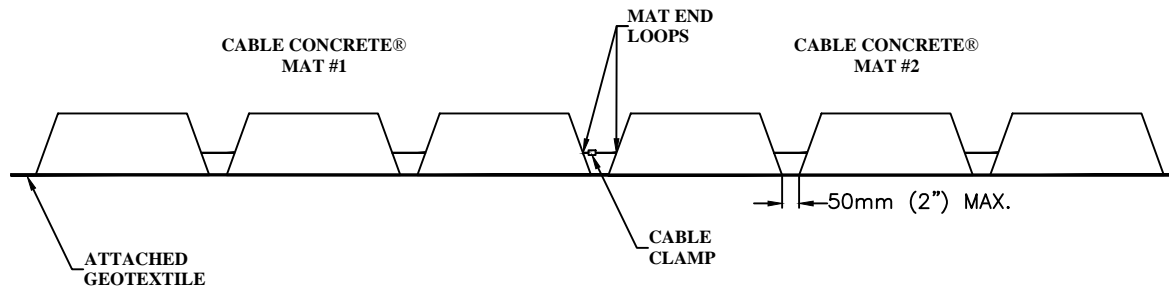


WHEN PLACING THE MATS, THE GAP BETWEEN THE MATS SHOULD NOT BE ANY LARGER THAN A 50mm (2") MAXIMUM. IF THE MATS ARE PLACED WITH A LARGER SPACE THAN 50mm (2"), IT IS RECOMMENDED TO GROUT THE SEAM BETWEEN THE MATS.

## PLAN VIEW

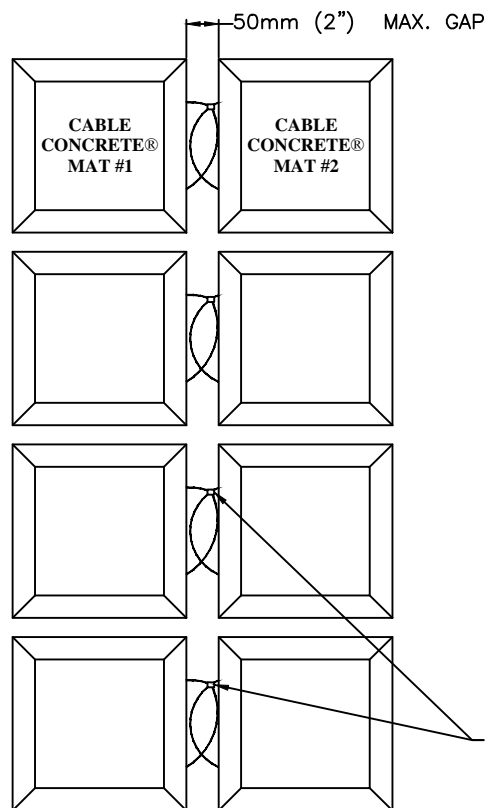

## CABLE CLAMP



NOTE:  
CABLE CLAMPS ARE MADE OF A U-BOLT,  
A COVER SADDLE, AND TWO NUTS.



INTERNATIONAL EROSION  
CONTROL SYSTEMS

22253 Hoskins Line  
Rodney, ON, N0L 2C0

Phone: 800-821-7462  
Fax: 866-496-1990

[www.iecs.com](http://www.iecs.com)

## CABLE CLAMP DETAIL

DRAWN BY:

D. JOHNSTON

CHECKED BY:

L. ARVAI

SCALE: N.T.S

DATE: 03/18/13

SHEET 1/1