

CS:5980

Foundations of Embedded Systems


Synchronous Model

Part II

Copyright 2014-26, Rajeev Alur and Cesare Tinelli.

Created by Cesare Tinelli at the University of Iowa from notes originally developed by Rajeev Alur at the University of Pennsylvania. These notes are copyrighted materials and may not be used in other course settings outside of the University of Iowa in their current form or modified form without the express written permission of one of the copyright holders. During this course, students are prohibited from selling notes to or being paid for taking notes by any person or commercial firm without the express written permission of one of the copyright holders.

Block Diagrams

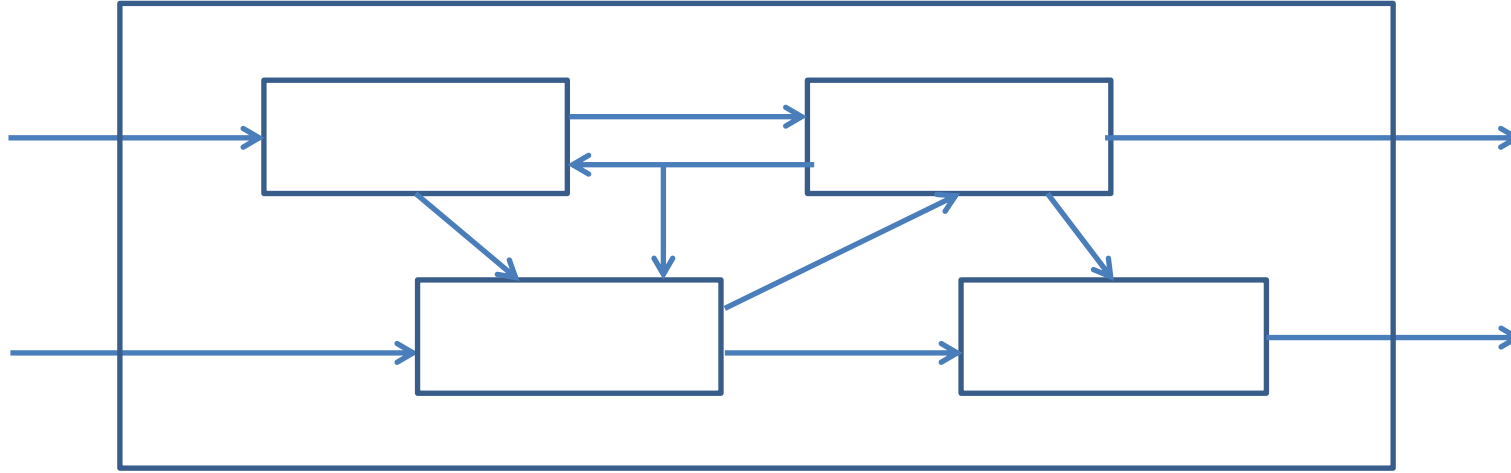

Structured modeling

- How do we build complex models from simpler ones?
- What are basic operations on components?


DoubleDelay



Design a component with

- **Input:** bool in
- **Output:** bool out
- **Behavior:** out in round n should equal in in round $n-2$

DoubleDelay

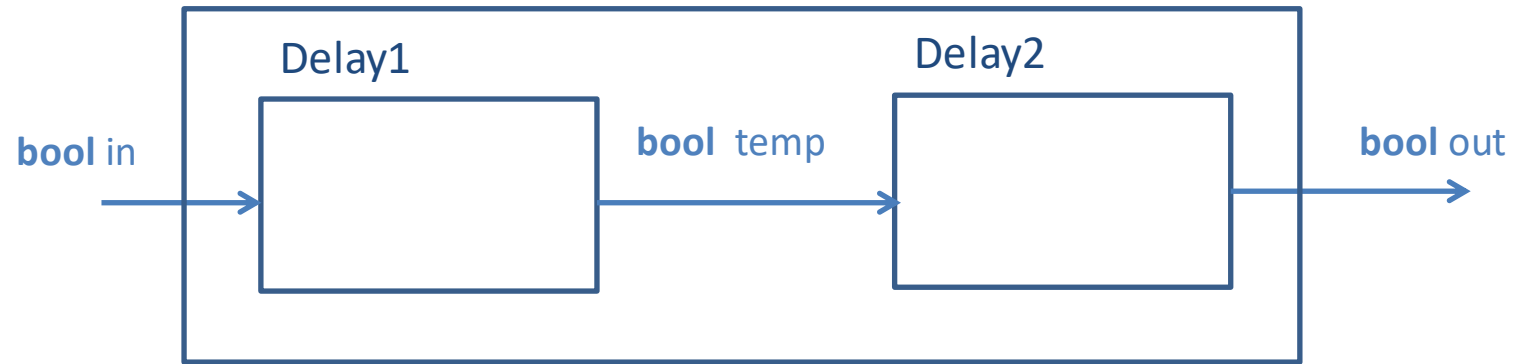


Instantiation: Create two instances of Delay

- output of Delay1 = input of Delay2 = variable temp

Parallel composition/product: Concurrent execution of Delay1 and Delay2


Encapsulation: Hide variable temp

Instantiation / Renaming

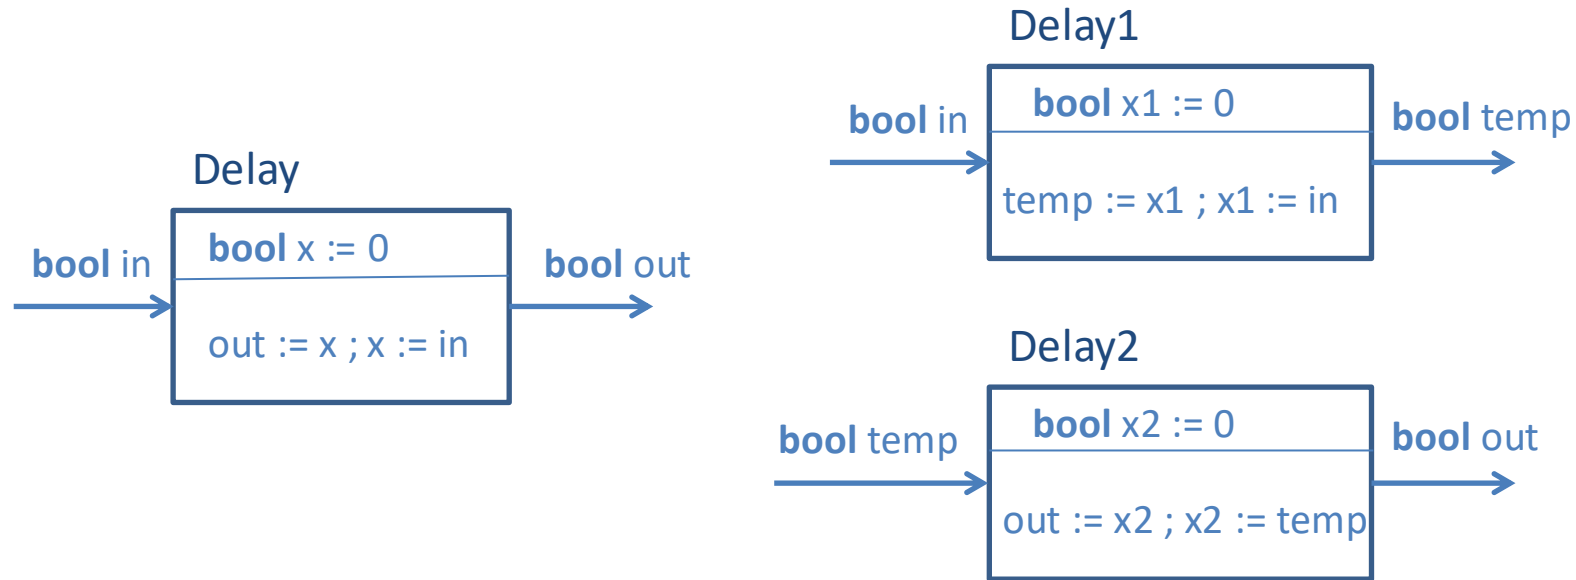


- $\text{Delay1} = \text{Delay}[\text{out} \mapsto \text{temp}]$
 - **Explicit** renaming of **input/output** variables
 - **Implicit** renaming apart of **state** variables
 - Definition $(I, O, S, \text{Init}, \text{React})$ of **Delay1** derived from **Delay**
- $\text{Delay2} = \text{Delay}[\text{in} \mapsto \text{temp}]$

Parallel Composition (or Product)

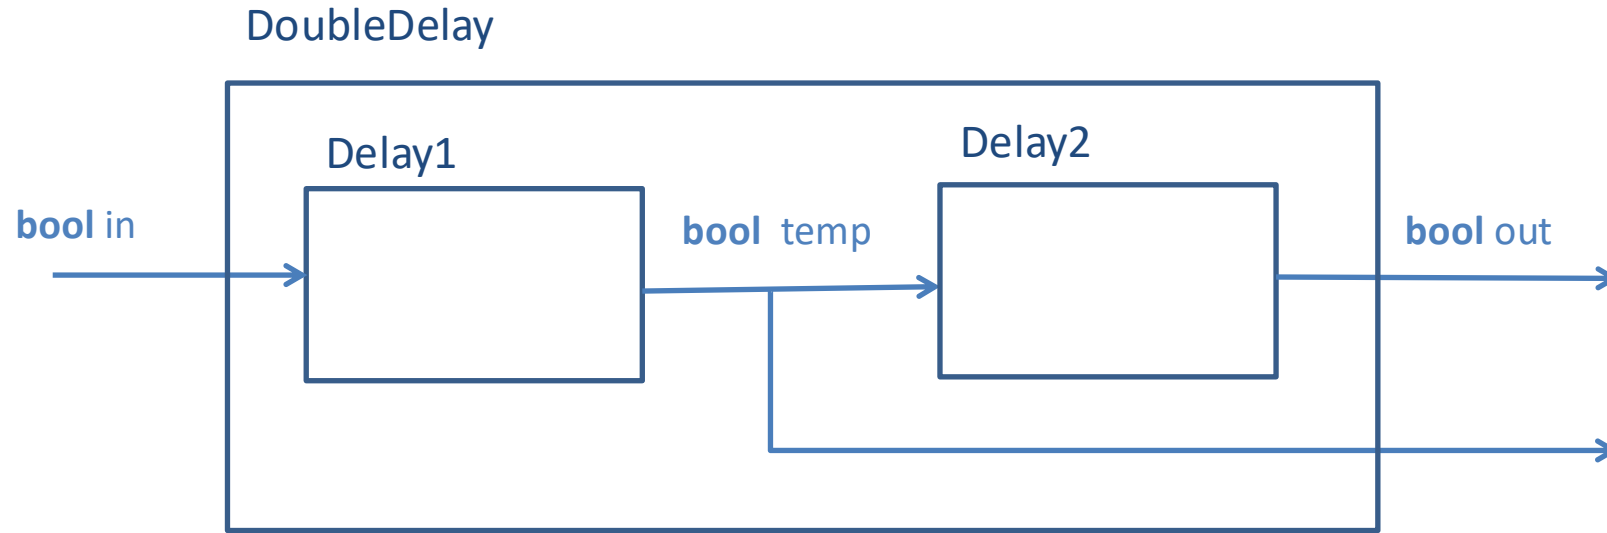

- $\text{DoubleDelay} = \text{Delay1} \parallel \text{Delay2}$
 - Two components execute concurrently
- When can two components be composed?
- How to define parallel composition precisely?
 - Input/output/state variables, initialization, and reaction description of composite defined in terms of components
 - Can be viewed as an **algorithm** for compilation

Compatibility of Components C1 and C2

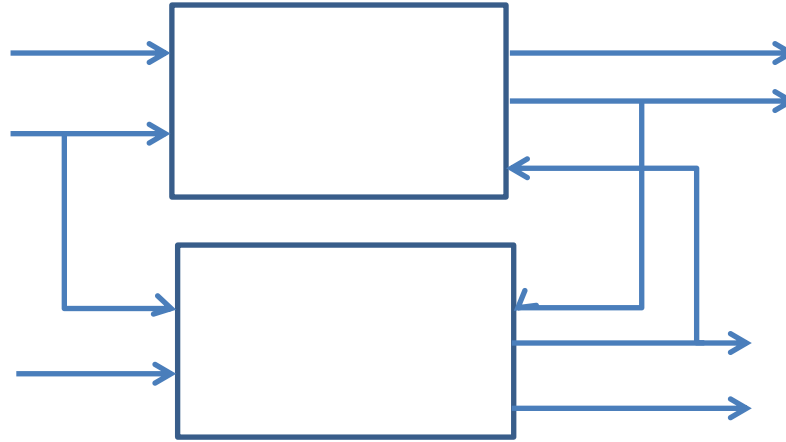


Allowed:

- Shared input variables
- Output variable of one is input variable of the other

Disallowed:

- Shared output variables
 - a unique component must be responsible for values of any given variable
- Shared state variables
 - but state variables can always be renamed to avoid conflicts

Outputs of Product

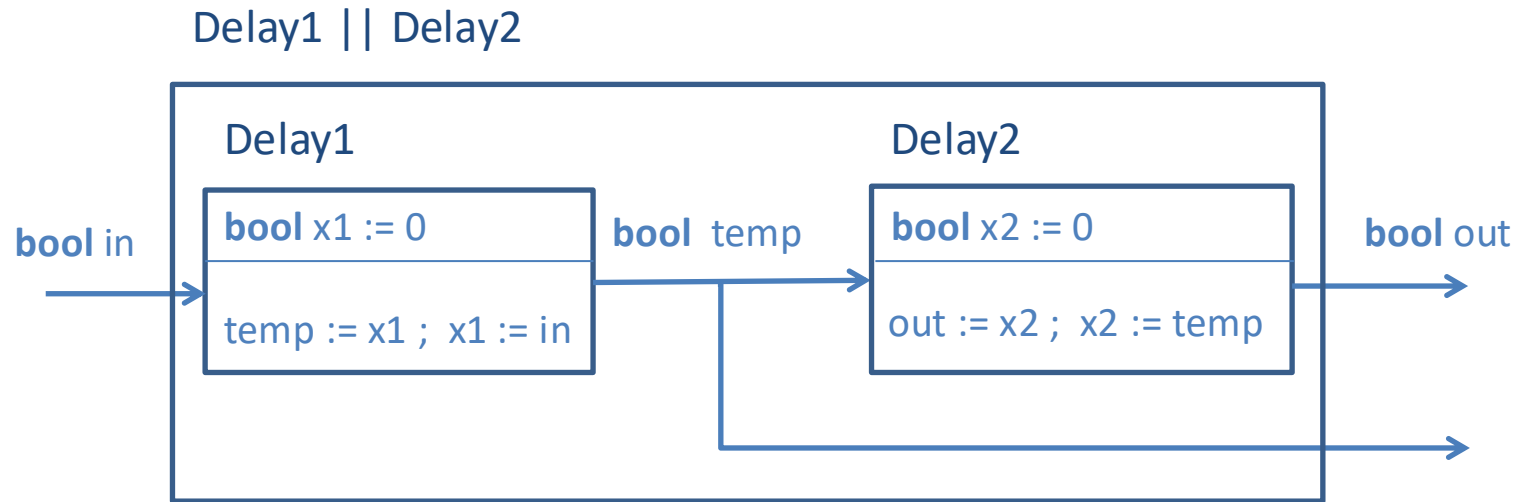


The **output variables** of Delay1 || Delay2 are { temp, out }

- By default, every output of product is available to outside world

If C_1 has **output vars** O_1 and C_2 has **output vars** O_2

then $C_1 || C_2$ has **output vars** $O_1 \cup O_2$

Inputs of Product

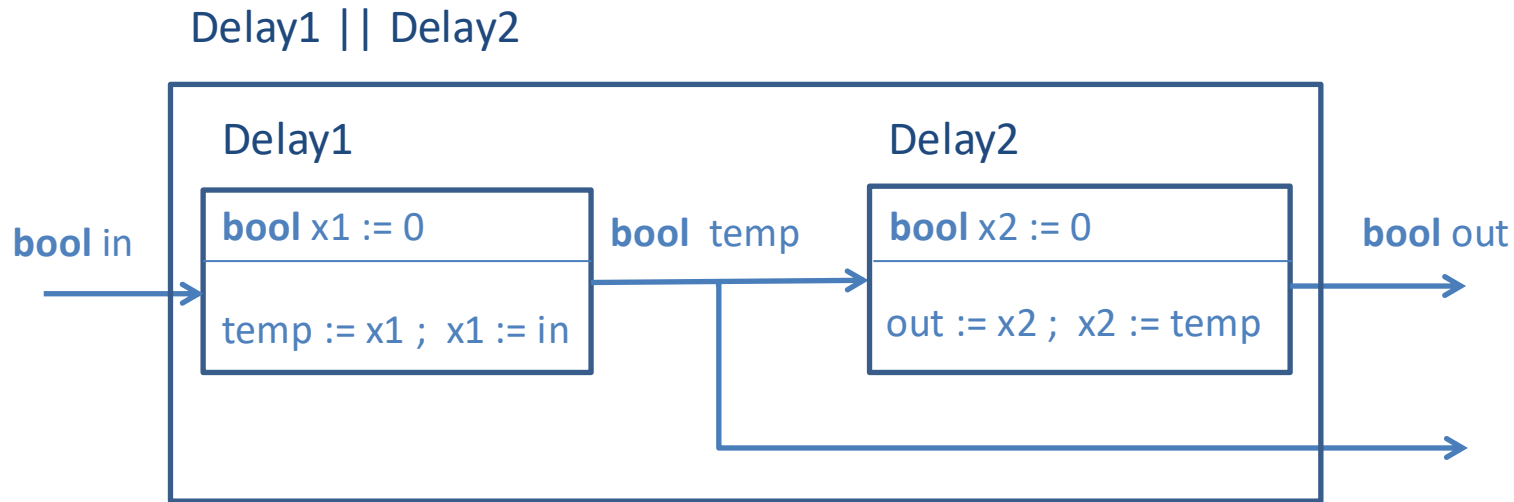

The **input variables** of Delay1 || Delay2 are { in }


- Even though **temp** is input of Delay2, it is not an input of product

If C_1 has **input vars** I_1 and C_2 has **input vars** I_2

then $C_1 || C_2$ has **input vars** $(I_1 \cup I_2) \setminus (O_1 \cup O_2)$

- A variable is an input of the product iff
it is an input of one of the components, and not an output of the other

States of Product

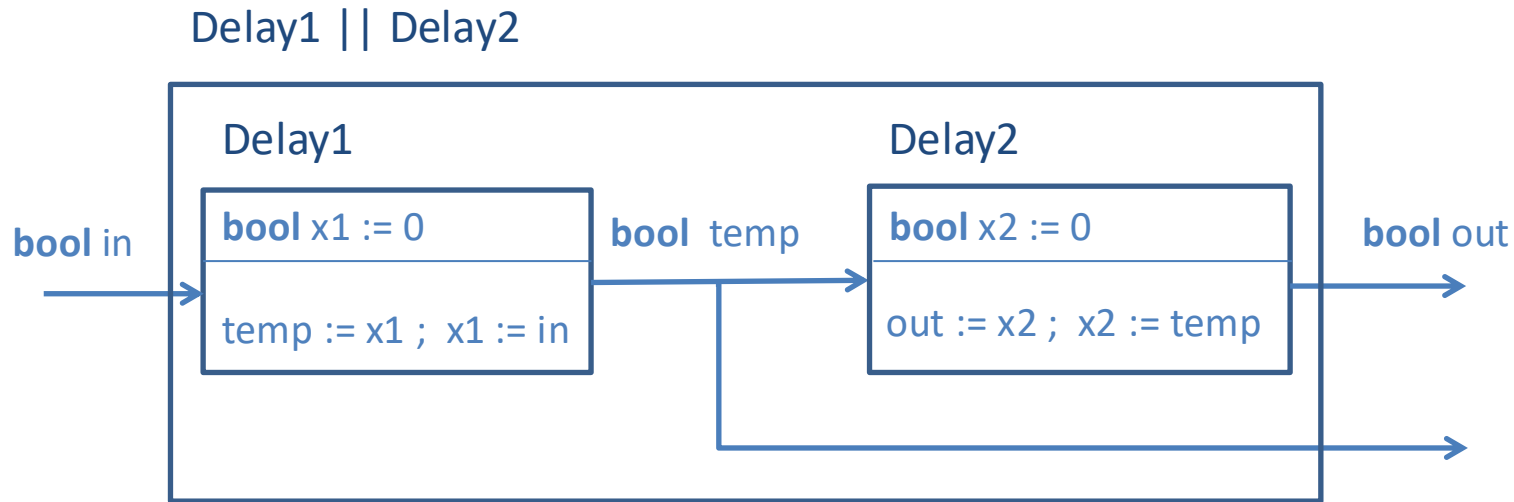


The **state variables** of `Delay1 || Delay2` are $\{x1, x2\}$

If C_1 has **state vars** S_1 and C_2 has **state vars** S_2

then $C_1 || C_2$ has **state vars** $S_1 \cup S_2$ (recall that $S_1 \cap S_2 = \emptyset$)

- A state of the product is a pair (s_1, s_2) , where s_1 is a state of C_1 and s_2 is a state of C_2
- If C_1 has n_1 states and C_2 has n_2 states, then $C_1 || C_2$ has $n_1 \cdot n_2$ states

Initial States of Product

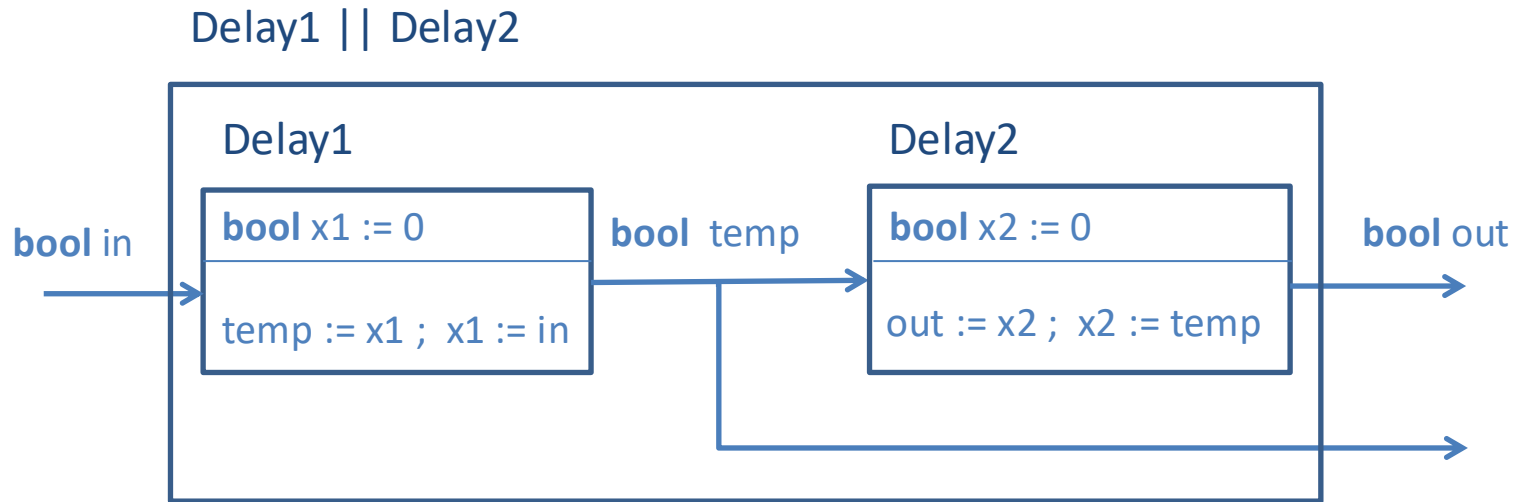

The **initialization code** Init for $\text{Delay1} \parallel \text{Delay2}$ is $x1 := 0 ; x2 := 0$


- Initial states are $\{ (0,0) \}$

If C_1 has **initialization** Init_1 and C_2 has **initialization** Init_2

then $C_1 \parallel C_2$ has **initialization** $\text{Init}_1 ; \text{Init}_2$ (or, equivalently, $\text{Init}_2 ; \text{Init}_1$)

- $\llbracket \text{Init} \rrbracket$ is the Cartesian product $\llbracket \text{Init}_1 \rrbracket \times \llbracket \text{Init}_2 \rrbracket$


Reactions of Product

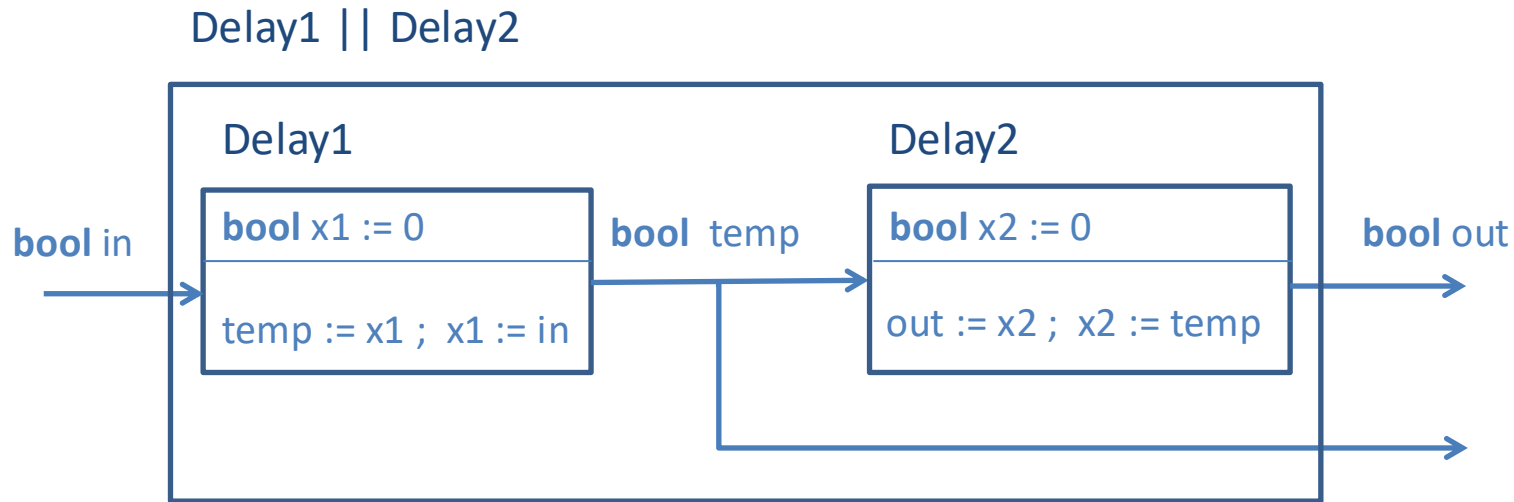

Execution of **Delay1 || Delay2** within a round:


- Environment provides input value for variable **in**
- Concurrently execute code **temp := x1 ; x1 := in** of **Delay1**
- Concurrently execute code **out := x2 ; x2 := temp** of **Delay2**

Final Composition

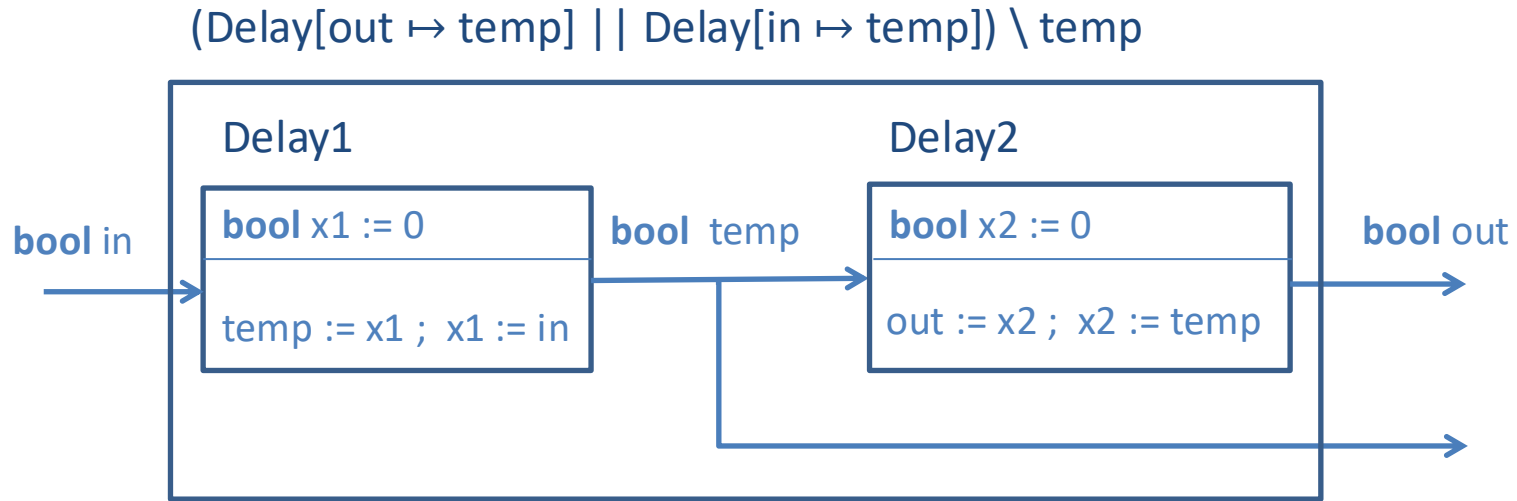

- **Instantiation:** $\text{Delay}[\text{out} \mapsto \text{temp}]$ and $\text{Delay}[\text{in} \mapsto \text{temp}]$
- **Parallel composition:** $\text{Delay}[\text{out} \mapsto \text{temp}] \parallel \text{Delay}[\text{in} \mapsto \text{temp}]$
- **Output hiding:** $(\text{Delay}[\text{out} \mapsto \text{temp}] \parallel \text{Delay}[\text{in} \mapsto \text{temp}]) \setminus \text{temp}$

Feedback Composition

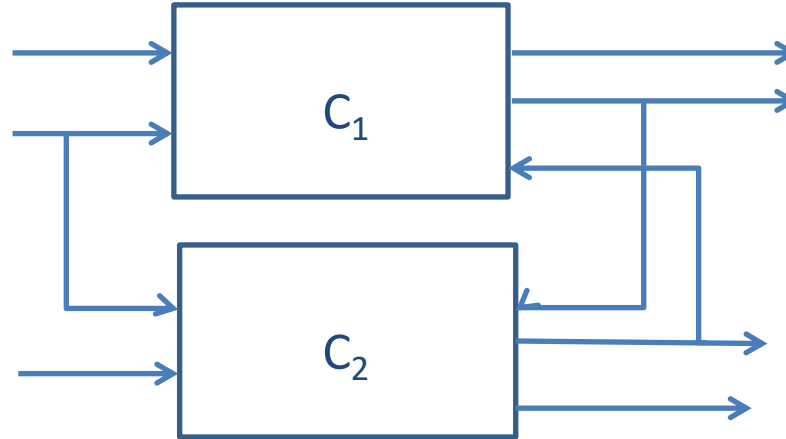


When

- some **output** of C_1 is an **input** of C_2 , and
- some **output** of C_2 is an **input** of C_1 ,

how do we order the executions of reaction React_1 and React_2 ?

Should such composition be allowed at all?

Feedback Composition

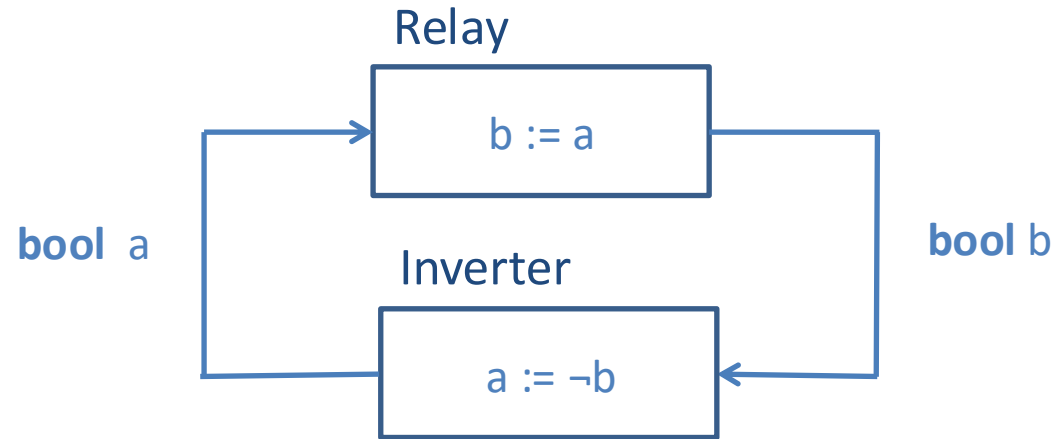


For **Relay**: its output **b** *awaits* its input **a**

For **Inverter**: its output **a** *awaits* its input **b**

- In product, we cannot order the execution of the two
- In the presence of such cyclic dependency, composition is **disallowed**
- **Intuition:** combinational **cycles** should be **avoided**

Feedback Composition

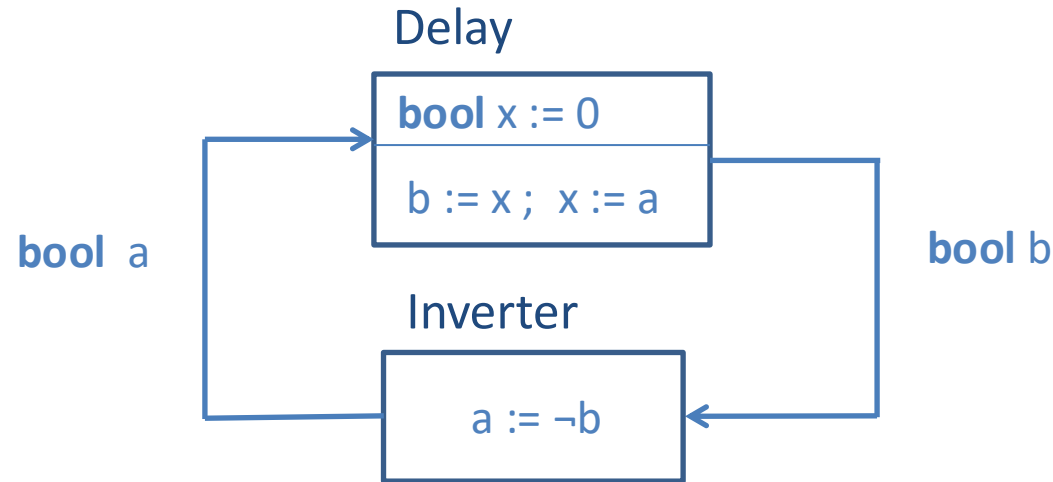


For **Delay**, output can be produced without waiting for input (by executing the assignment `b := x`)

Reaction code for **Delay** || **Inverter** could be `b := x ; a := ¬b ; x := a`


- Goal:** Refine specification of reaction description so that
- await** dependencies among output-input vars are easy to detect
 - Ordering of code-blocks during composition should be easy

Interfaces

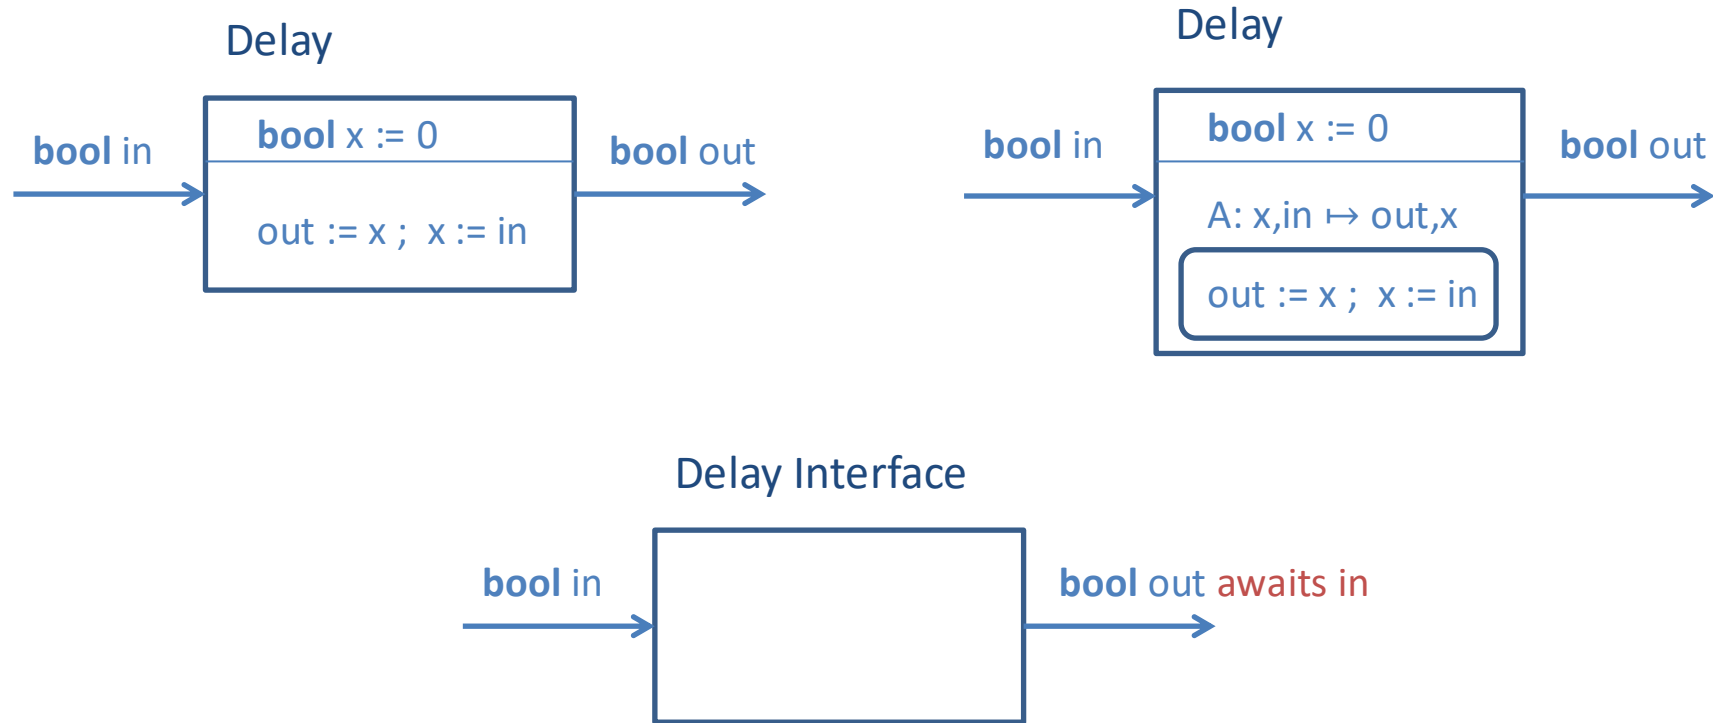

Interface = (input variables, output variables, await dependencies)


Interface: SplitDelay

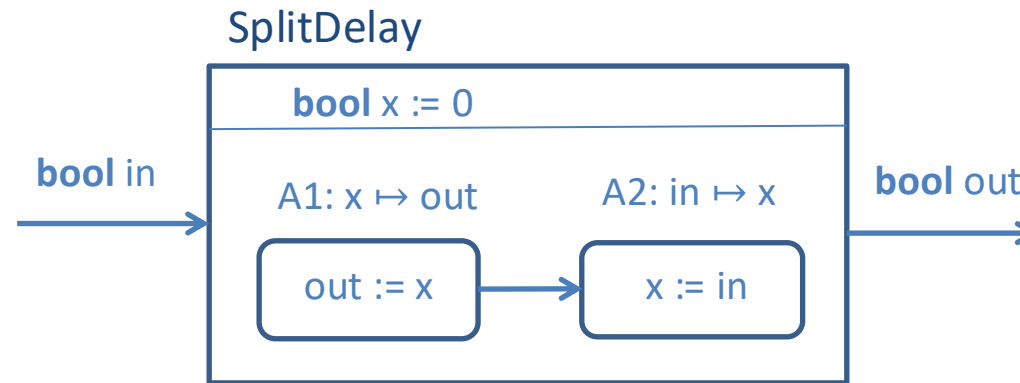

Decomposing the reaction into tasks **eliminates** in this case the await dependency between **out** and **in**




Example Interface

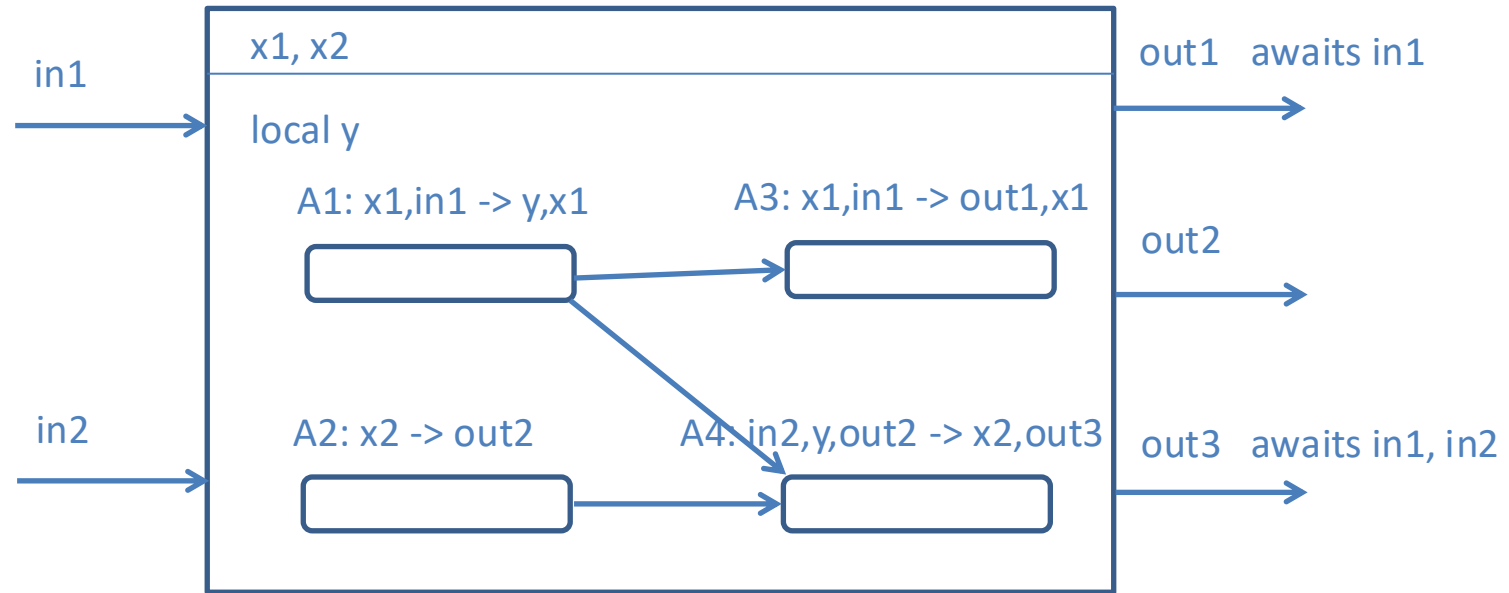

Example Interface




Back to Parallel Composition

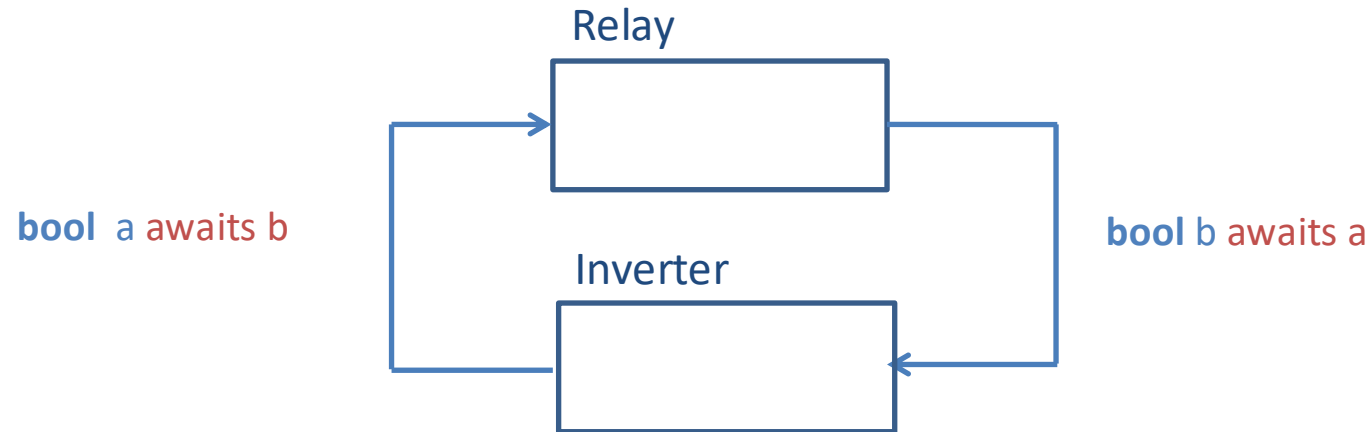

Relay and Inverter are not compatible since there is a cycle in their combined await dependencies

Composing SplitDelay and Inverter

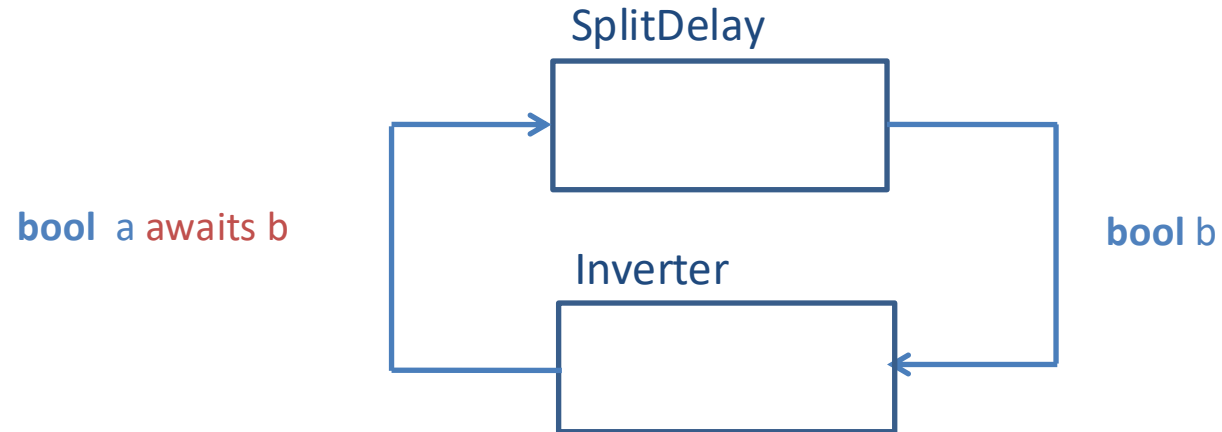

SplitDelay and **Inverter** are compatible since there is no cycle in their combined await dependencies

Note: Based on their interfaces, **Delay** and **Inverter** are not compatible

Component Compatibility Definition

Given components :


- C_1 with input vars I_1 , output vars O_1 , and awaits-dep. relation $\succ_1$
- C_2 with input vars I_2 , output vars O_2 , and awaits-dep. relation $\succ_2$

C_1 and C_2 are *compatible* if



- they have no common outputs: sets O_1 and O_2 are disjoint
- the relation $\succ_1 \cup \succ_2$ of combined await-dependencies is *acyclic*

Parallel Composition is *allowed only* for *compatible* components

Defining the Product

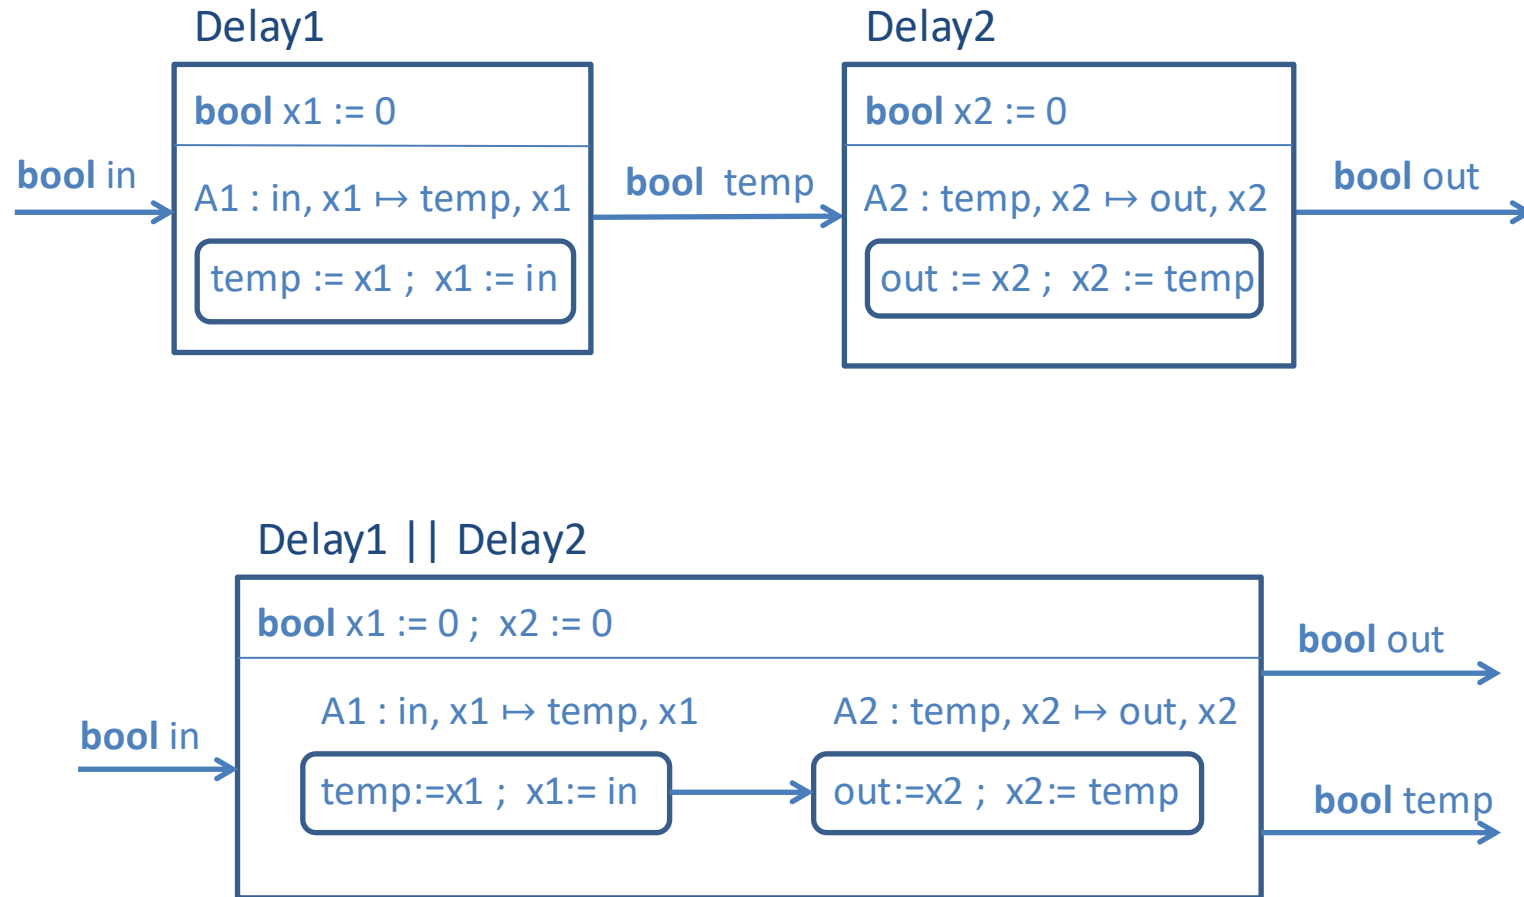

Composing SplitDelay and Inverter

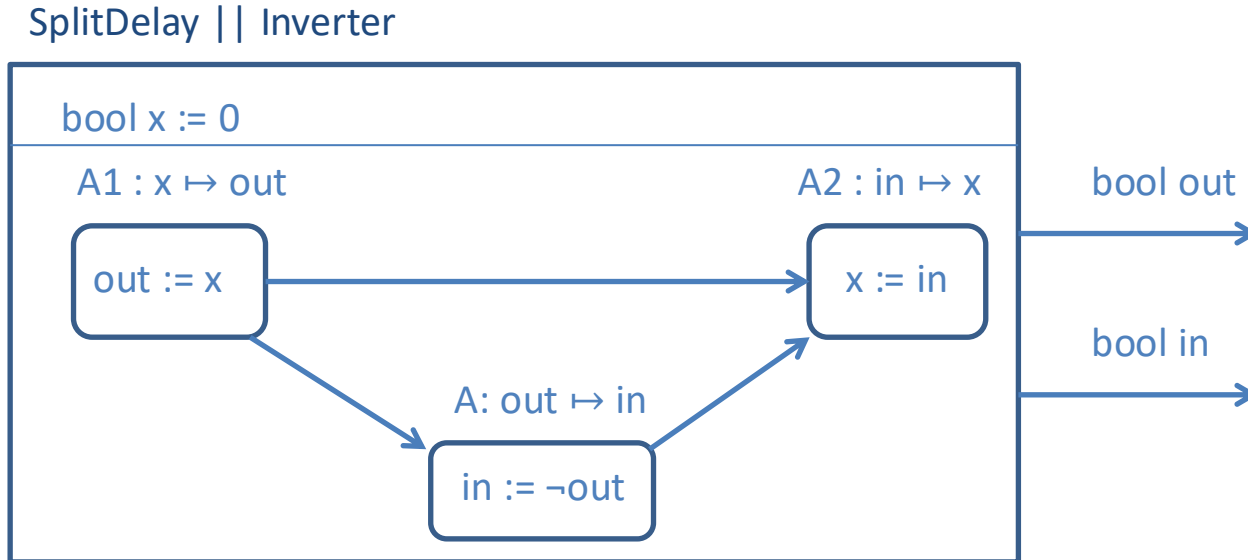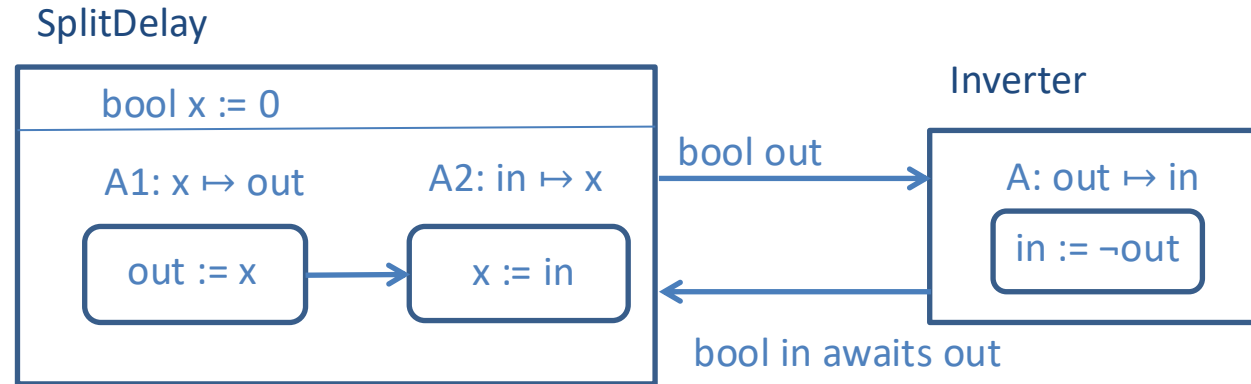

Parallel Composition Definition

- Given compatible components
 - $C_1 = (I_1, O_1, S_1, \text{Init}_1, \text{React}_1)$ and
 - $C_2 = (I_2, O_2, S_2, \text{Init}_2, \text{React}_2)$,what's the reaction of product $C = C_1 \parallel C_2$?
- Suppose React_1 and React_2 are specified using resp.
 - local vars L_1 , set of tasks P_1 , and precedence $<_1$, and
 - local vars L_2 , set of tasks P_2 , and precedence $<_2$
- Reaction description for product C has
 - local variables $L_1 \cup L_2$
 - set of tasks $P_1 \cup P_2$
 - precedence edges $<_1 \cup <_2 \cup \{\text{edges between tasks } A_1 \text{ and } A_2 \text{ of different components if } A_2 \text{ reads a var written by } A_1\}$

Parallel Composition Definition

- ❑ Why is the parallel composition operation well-defined?
 - Can the new edges make task graph of the product cyclic?
- ❑ **Recall:** Await-dependencies among I/O variables of compatible components must be acyclic
- ❑ **Proposition 2.1:** Awaits compatibility implies acyclicity of product task graph
- ❑ **Bottom line:** Interfaces capture enough information to define parallel composition in a consistent manner
- ❑ **Aside:** It is possible to define more flexible (but more complex) notions of awaits dependency



Properties of Parallel Composition

- ❑ **Commutative:** $C_1 \parallel C_2 = C_2 \parallel C_1$ (when C_1, C_2 are compatible)
- ❑ **Associative:** $(C_1 \parallel C_2) \parallel C_3 = C_1 \parallel (C_2 \parallel C_3)$
 - If compatibility check fails in one case, it will also fail in the others
- ❑ **Bottom line:** order of composition does not matter
- ❑ If C_1 has n_1 states and C_2 has n_2 states then $C_1 \parallel C_2$ has $n_1 \cdot n_2$ states
- ❑ If both C_1 and C_2 are deterministic, so is $C_1 \parallel C_2$
- ❑ If both C_1 and C_2 are event-triggered, is $C_1 \parallel C_2$ guaranteed to be event-triggered?

Output Hiding

- ❑ Let C be a component and y one of its output vars
 - The result of hiding y in C , written as $C \setminus y$, is a component identical to C except that y is no longer an output variable but a local variable
- ❑ This is useful for limiting the scope of a component (encapsulation)

DoubleDelay

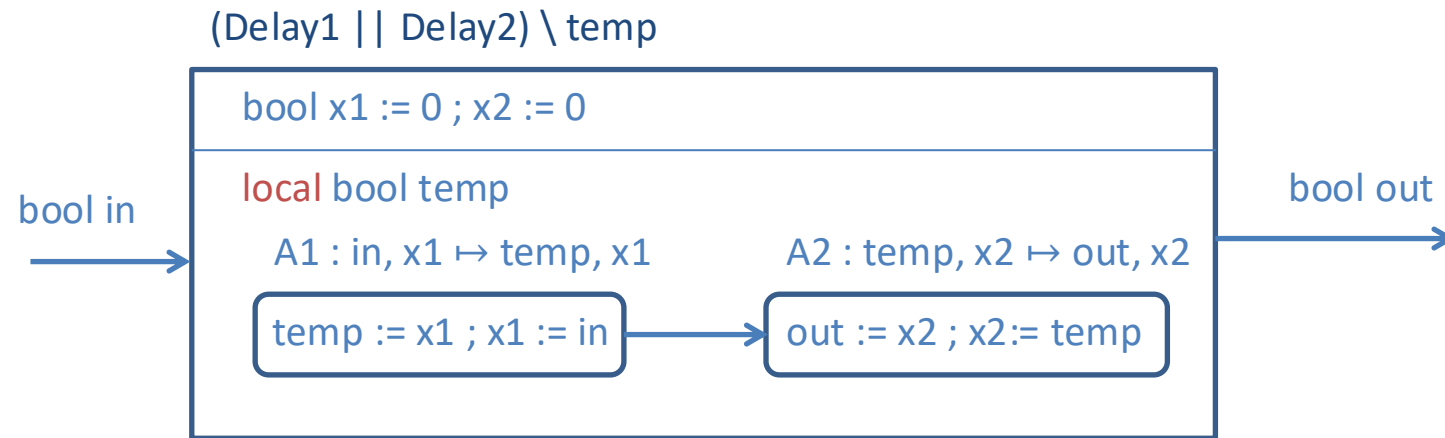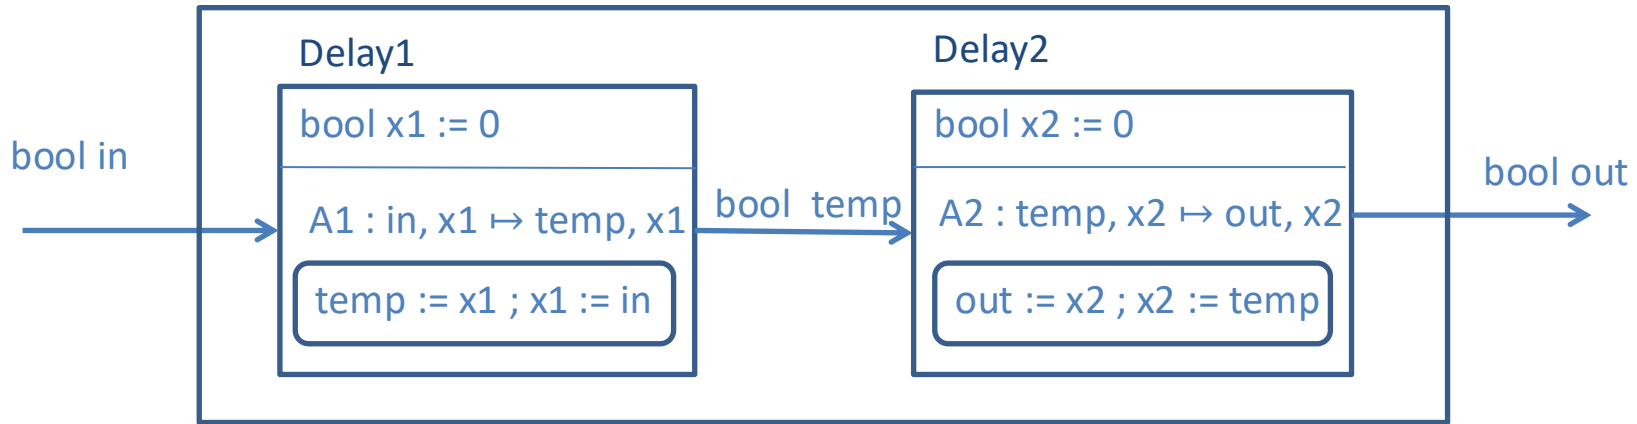

Credits

Notes based on Chapter 2 of

[Principles of Cyber-Physical Systems](#)

by Rajeev Alur

MIT Press, 2015