




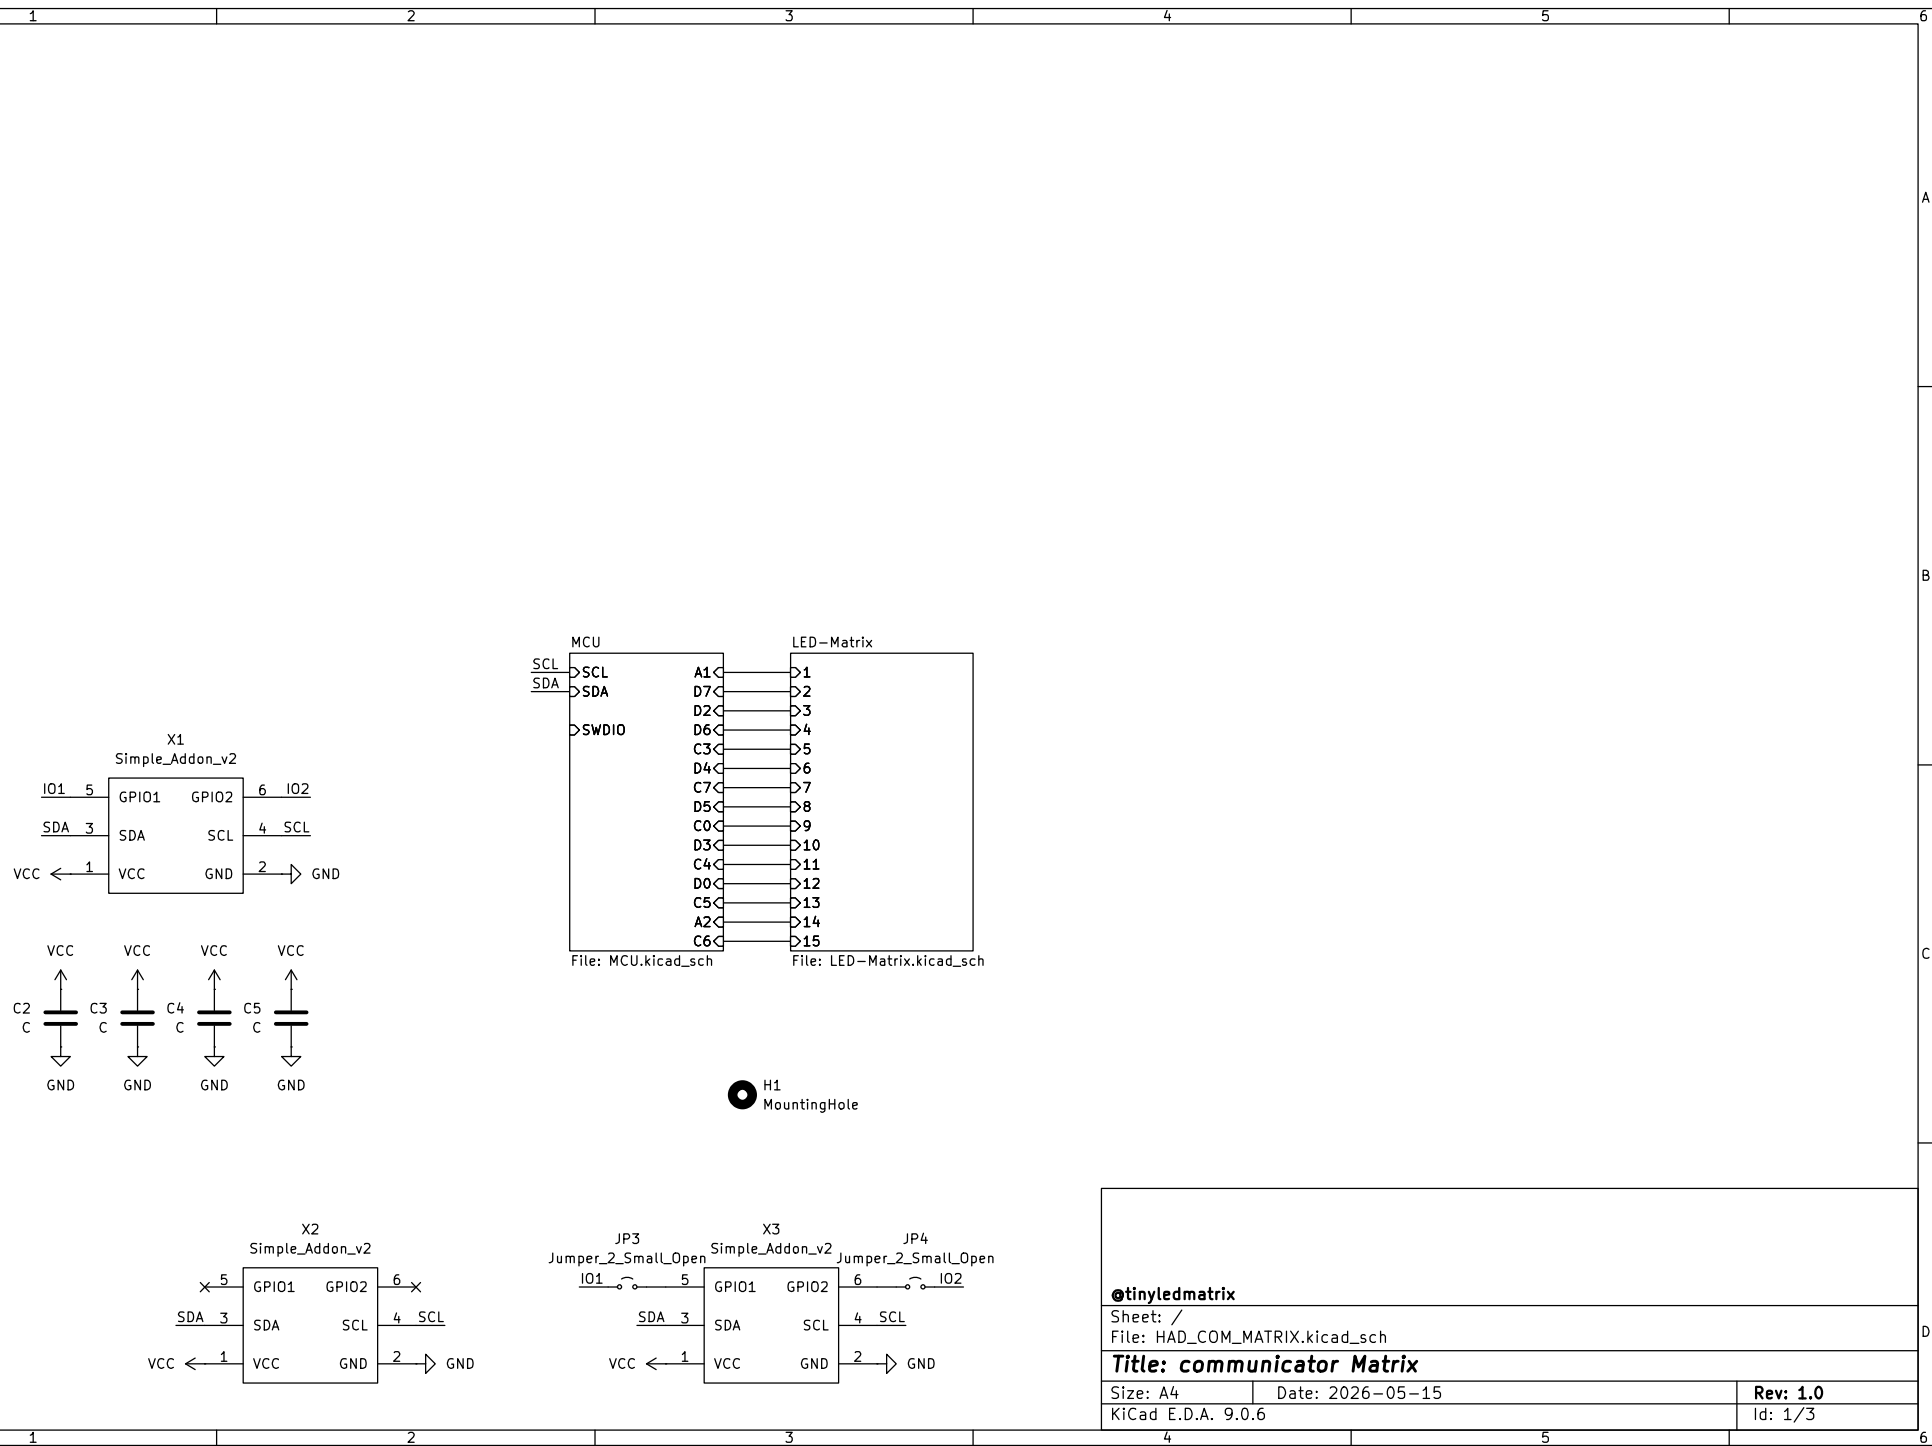


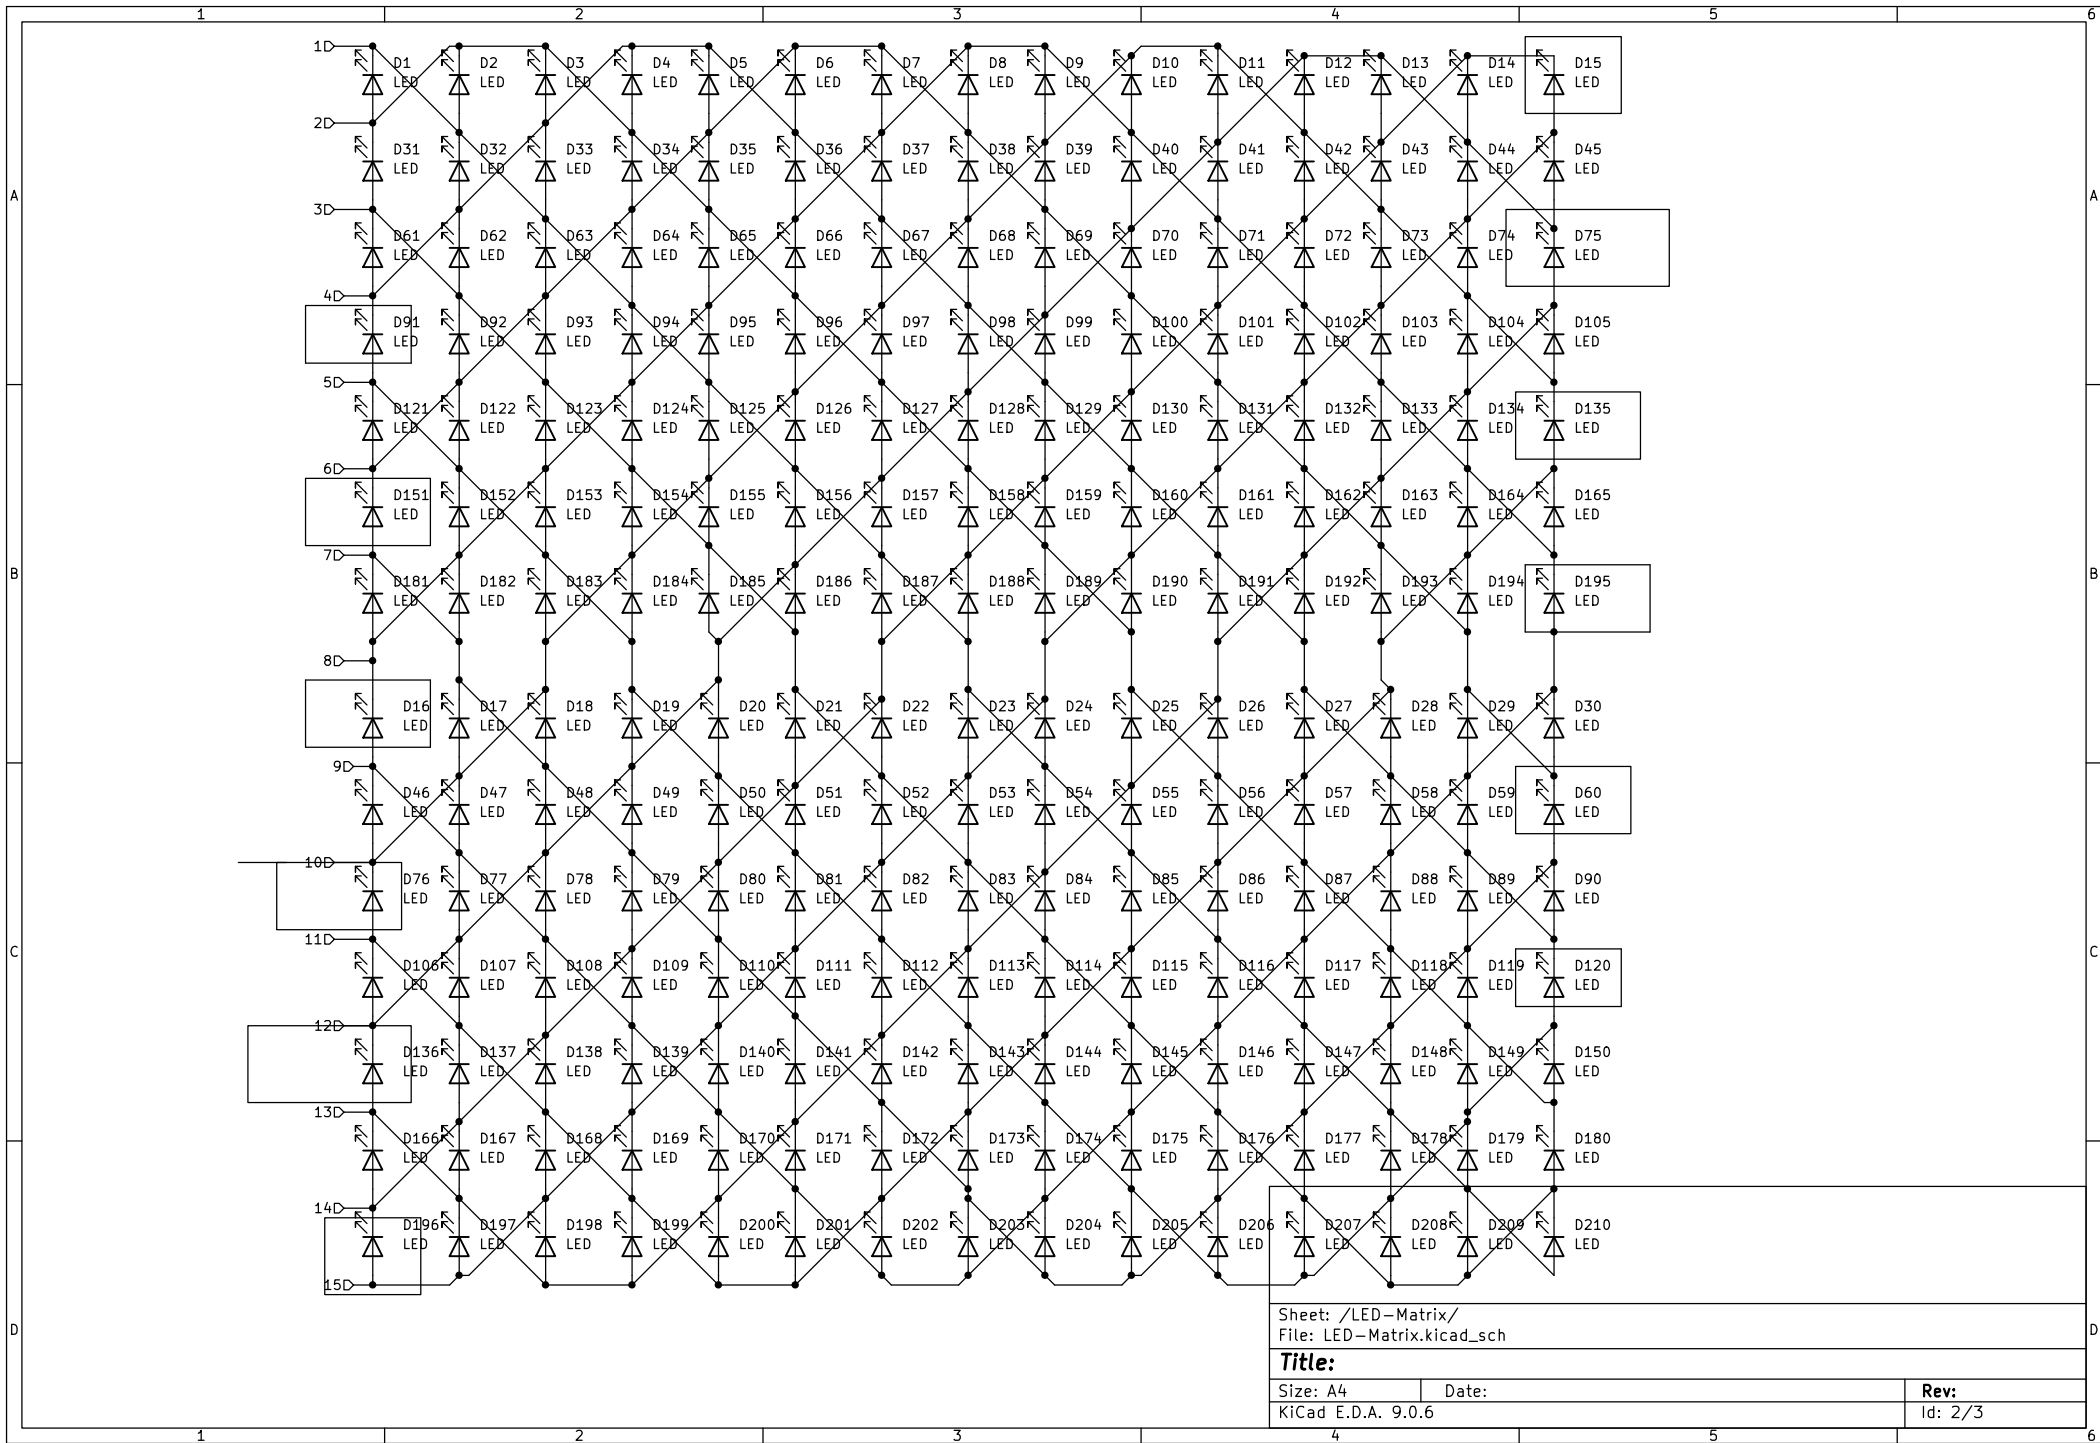

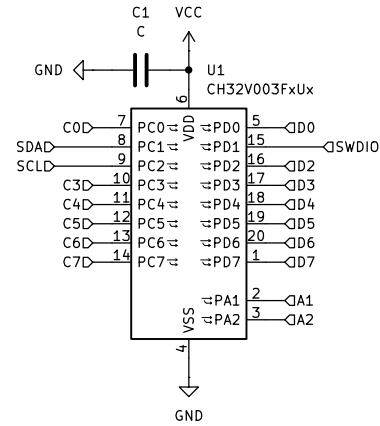

CH32V003F4U6

3x3mm, 0.4mm BSC

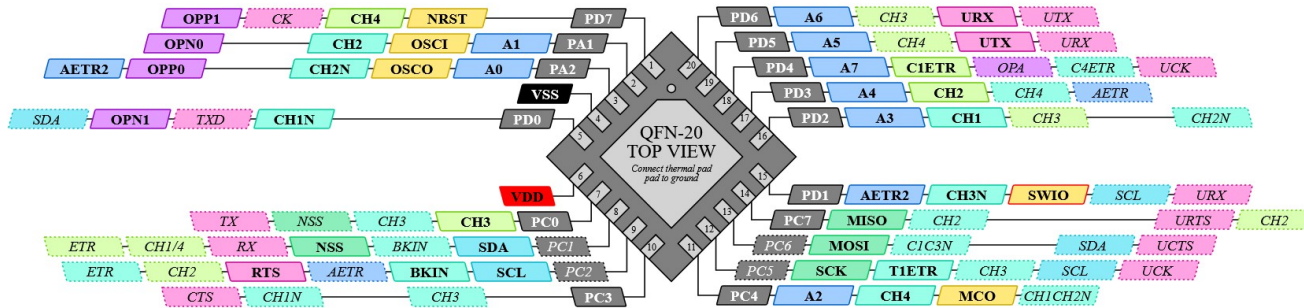

UART
I2C
SPI
ADC

SYS
TIM1
TIM2
OP AMP

PIN
SWD
VSS
VDD

NOTE:
If VDD is 3.3V: PC1, PC2, PC5 and PC6 are 5V tolerant

Default Function
Alternate Function

d_sch

Date:

Rev:

Id: 3/3

KLICAD E.U.A. 9.0.6