

REV	Revision Notes	Designed by	Approved by	Date

Color Legend:

3.3V IO

USB/5V



1.8V

Bank 1 Voltage (1.2-3.3V)


Bank 2 Voltage (1.2-1.8V)
Bank 3 Voltage (1.2-1.8V)

Bank 3 Voltage (1.2-1.8V)


SoM Connectors

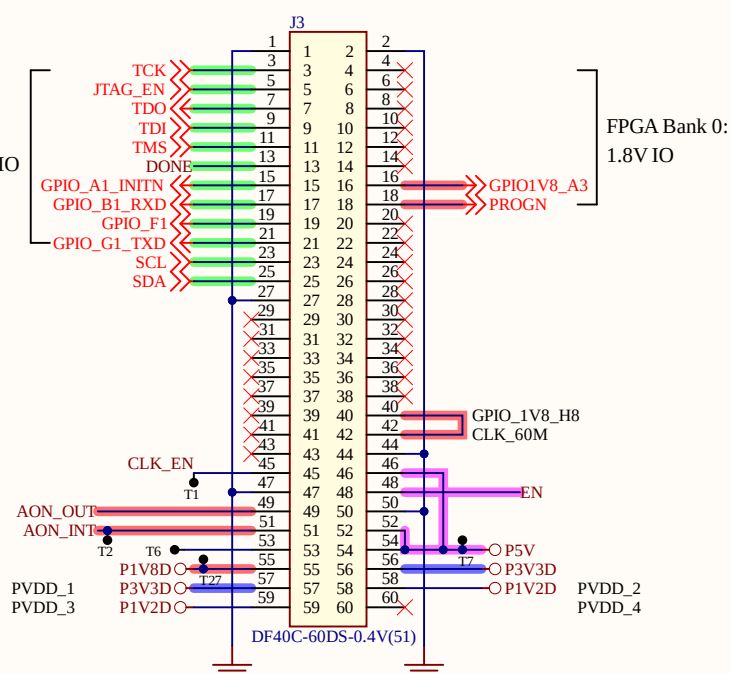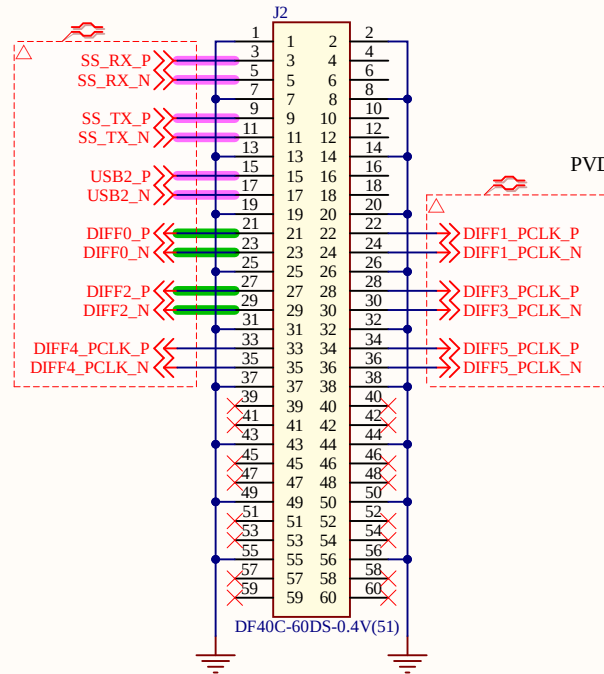


LED's/Switches

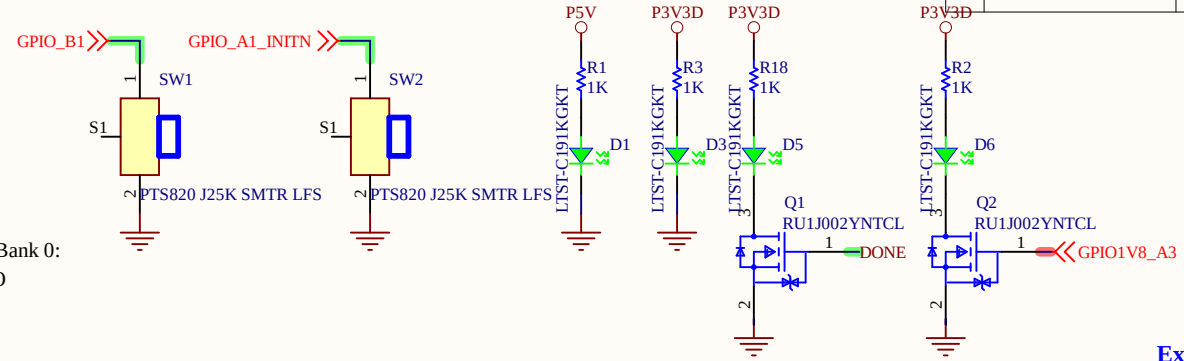


Expansion

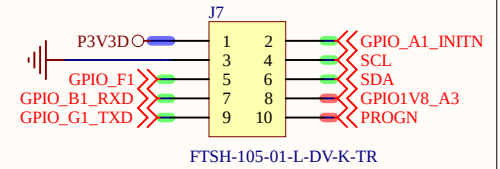


Camera 0

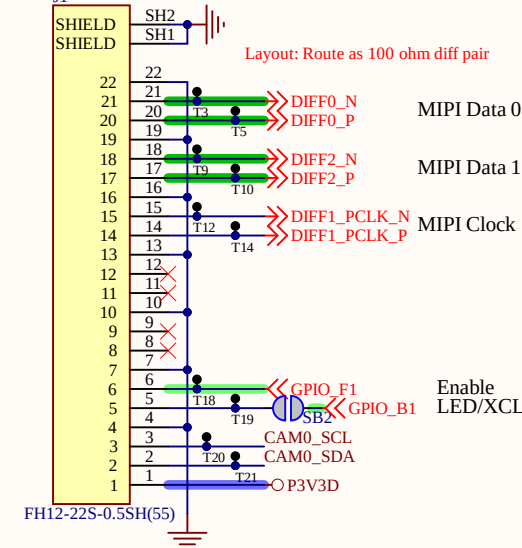


Camera 1

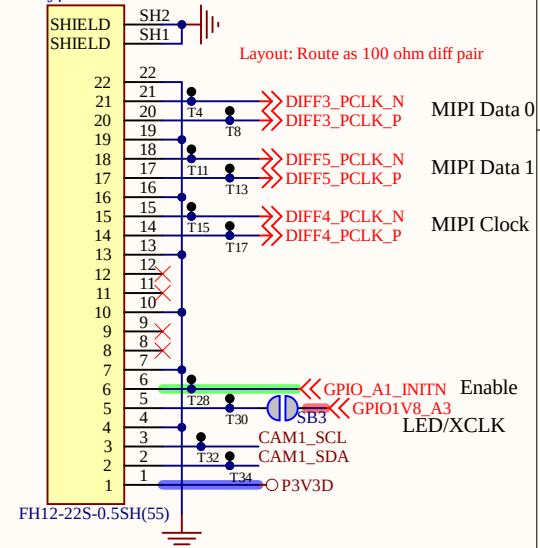


AON Circuit

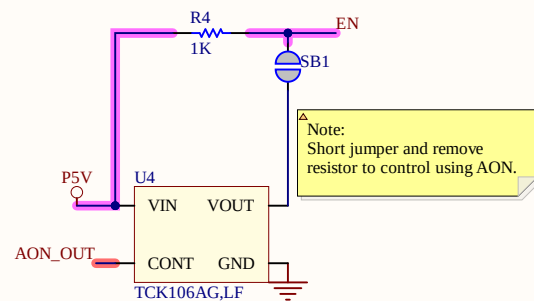

1.2V LDO

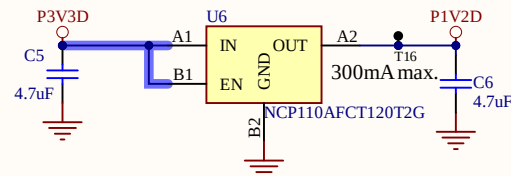

I2C Mux

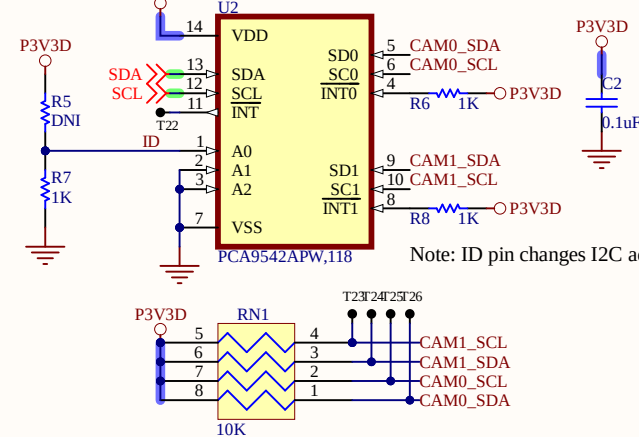

TP1




Layout Note: Place TP's on bottom side

Note:
The 2 cameras may have the same I2C address. A Mux ensures that we can address each camera separately.

Note: ID pin changes I2C address of the expander!

Note:
The 1.2V LDO is required as the bank voltage for proper MIPI operation.

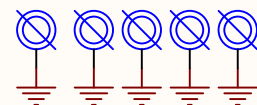


PCB
LOGO
WEEE

PCB
LOGO
ESD Susceptible

Title <i>tinyCamera Reference Design</i>			
Size: B	Number: *	Revision: *	
Date: 06-06-2025 Time: 13:17:21	Sheet 1 of 3		
File: Base_Module.SchDoc			

USBC Debug Connector

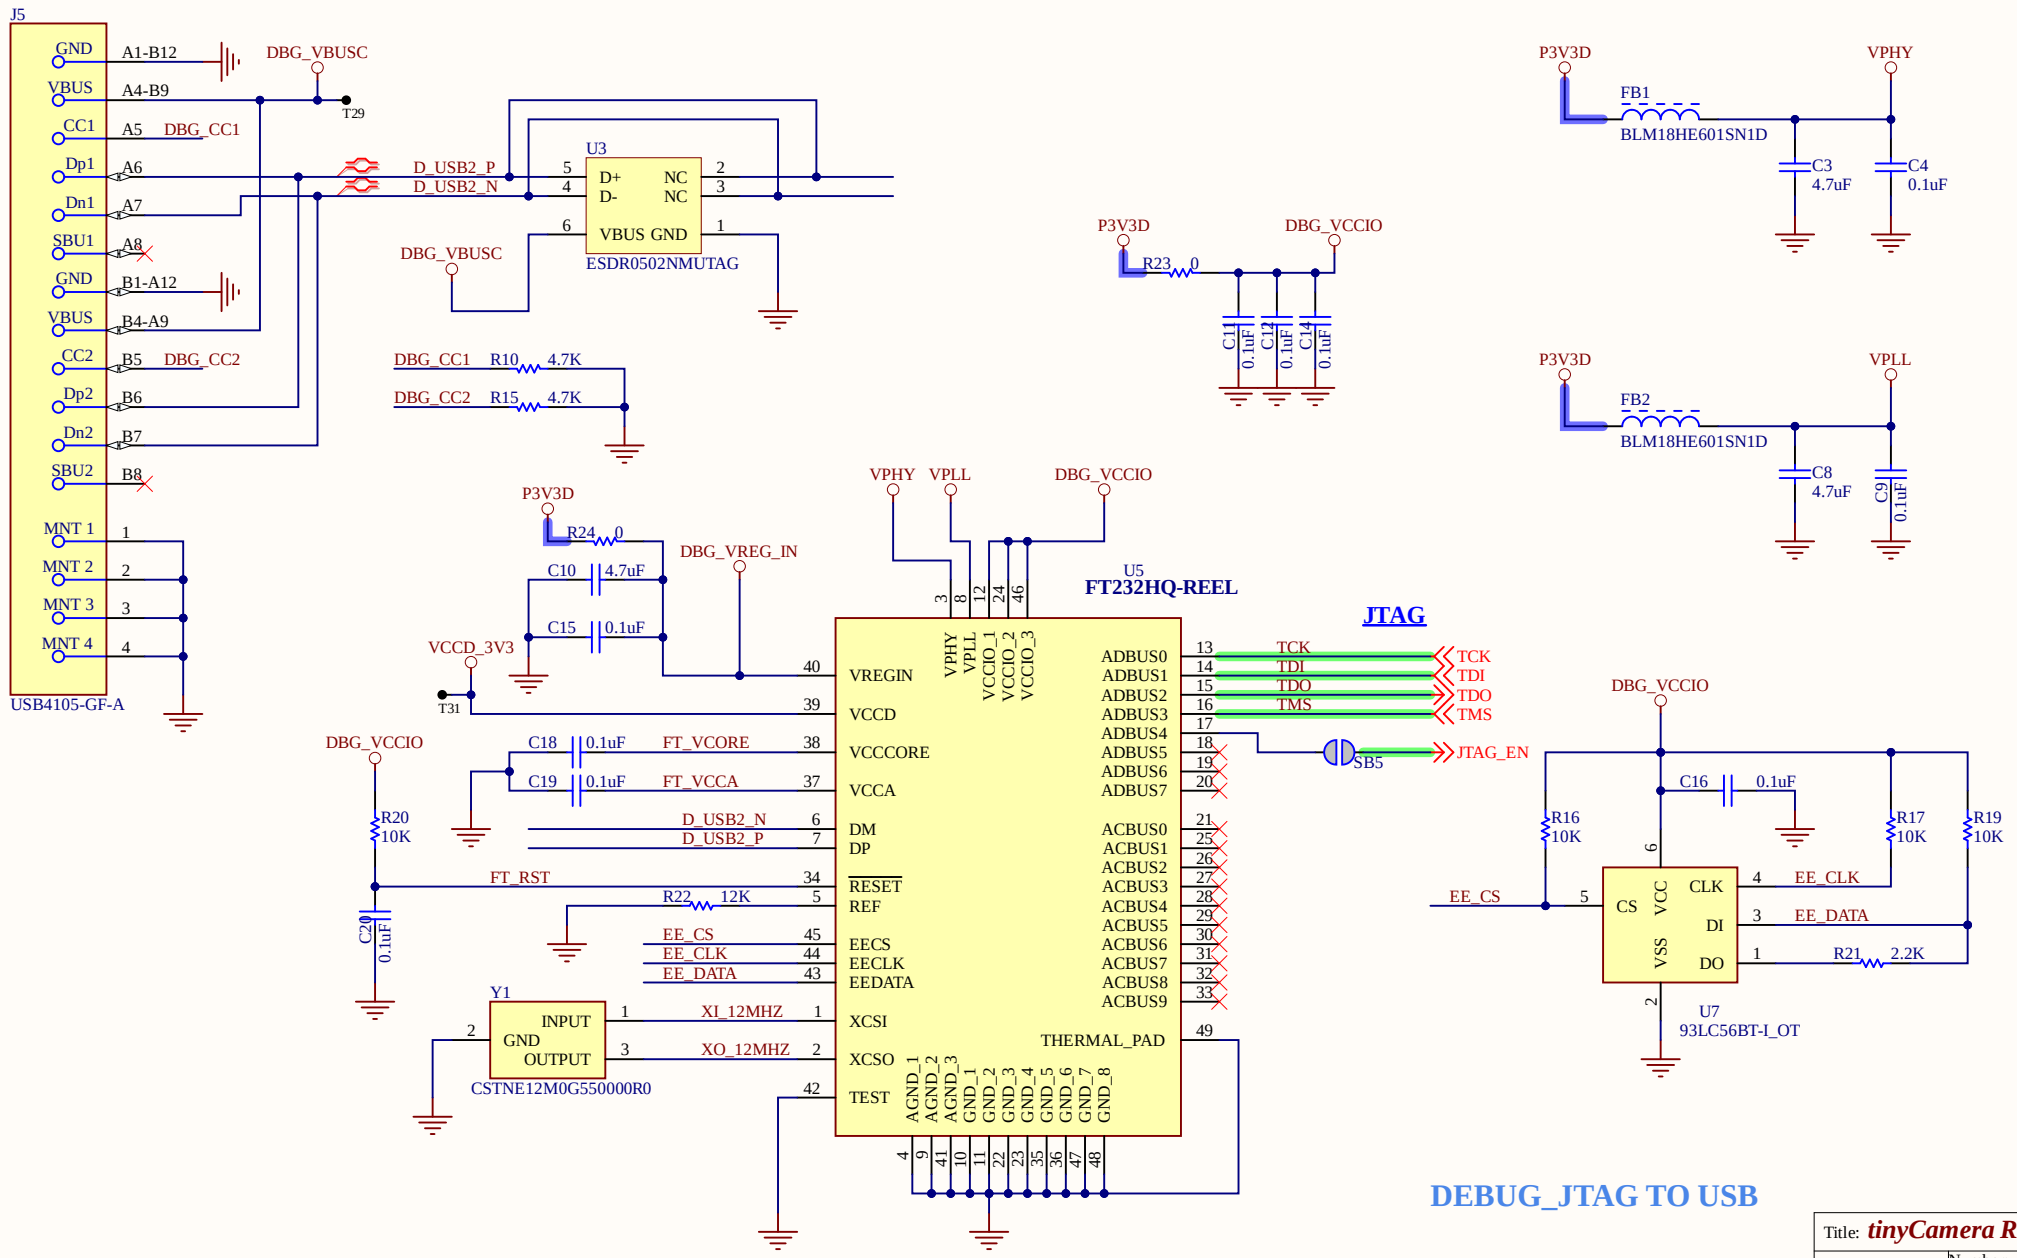

DEBUG_JTAG TO USB

