


Ingressar a Maquina no Domínio

Disciplina: Administração e Segurança de Sistemas de Computadores

Curso: Licenciatura em Engenharia Informática

Docentes: Doutor Eng. Lourino Chemane, Engra. Ivone Cipriano e eng. Délcio Chadreca
DEEL, Faculdade de Engenharia, UEM

Usuários e Computadores do AD-DS

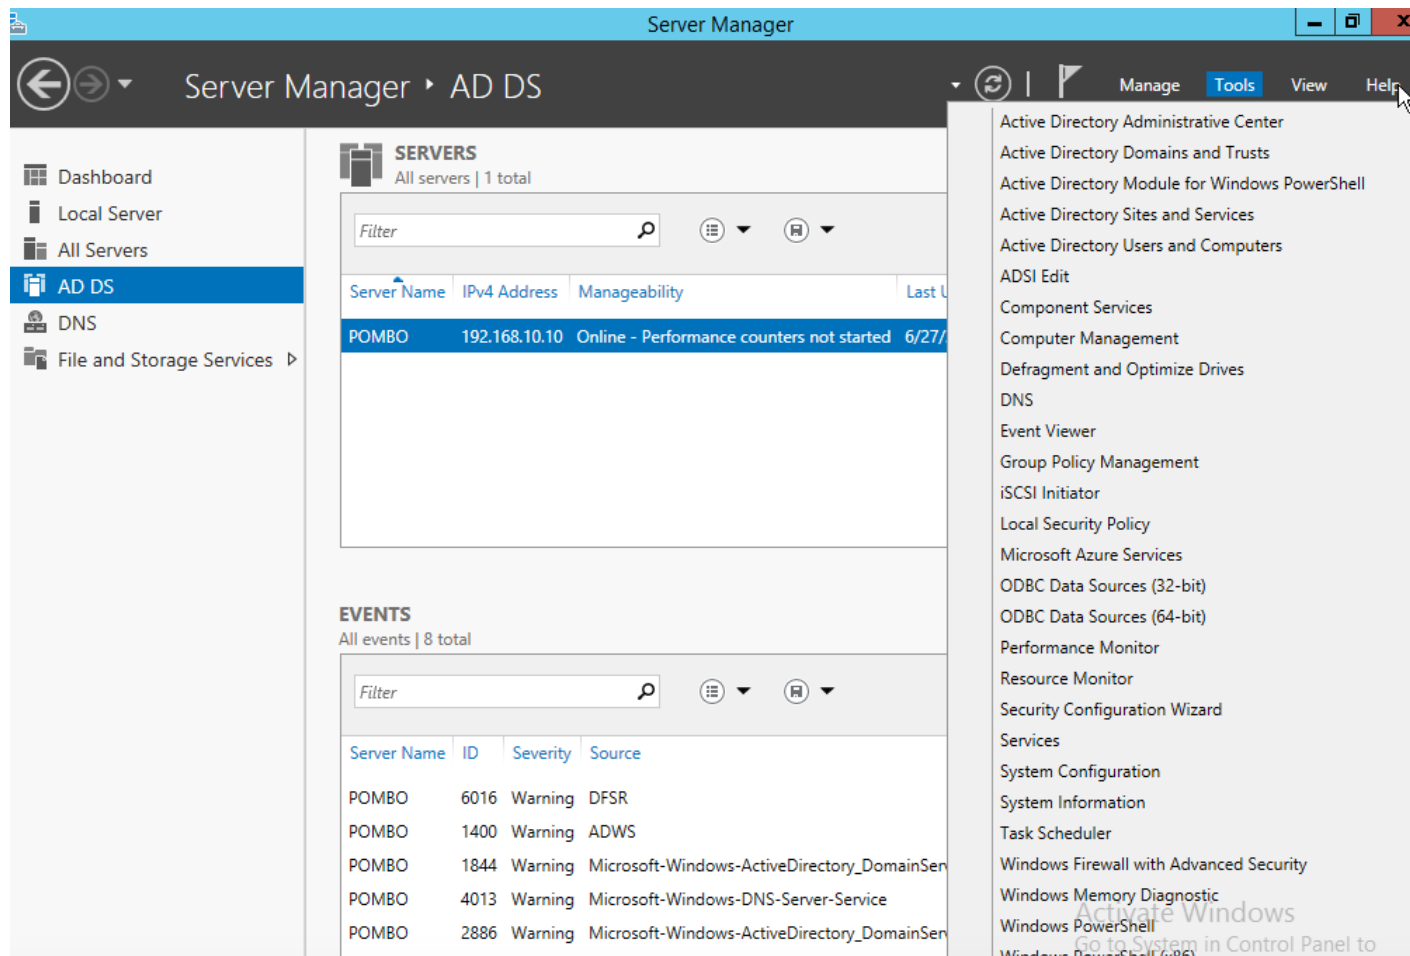

Confirmando as Configurações de Rede

```
PS C:\Users\Administrator> ipconfig /all
```

Windows IP Configuration

```
Host Name . . . . . : POMBO
Primary Dns Suffix . . . . . : feuem.ac.mz
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No
DNS Suffix Search List. . . . . : feuem.ac.mz
```

Ethernet adapter Ethernet:


```
Connection-specific DNS Suffix . : 
Description . . . . . : Intel(R) PRO/1000 MT Desktop Adapter
Physical Address. . . . . : 08-00-27-57-53-13
DHCP Enabled. . . . . : No
Autoconfiguration Enabled . . . . : Yes
IPv4 Address. . . . . : 192.168.10.10(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.10.254
DNS Servers . . . . . : 192.168.10.10
NetBIOS over Tcpip. . . . . : Enabled
```

Tunnel adapter isatap.{A7A90ADA-F011-4DF8-BEB1-F20A254A2262}:


```
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . : 
Description . . . . . : Microsoft ISATAP Adapter #2
Physical Address. . . . . : 00-00-00-00-00-00-E0
DHCP Enabled. . . . . : No
Autoconfiguration Enabled . . . . : Yes
```

```
PS C:\Users\Administrator>
```

Configuração da Placa de Rede Do Cliente

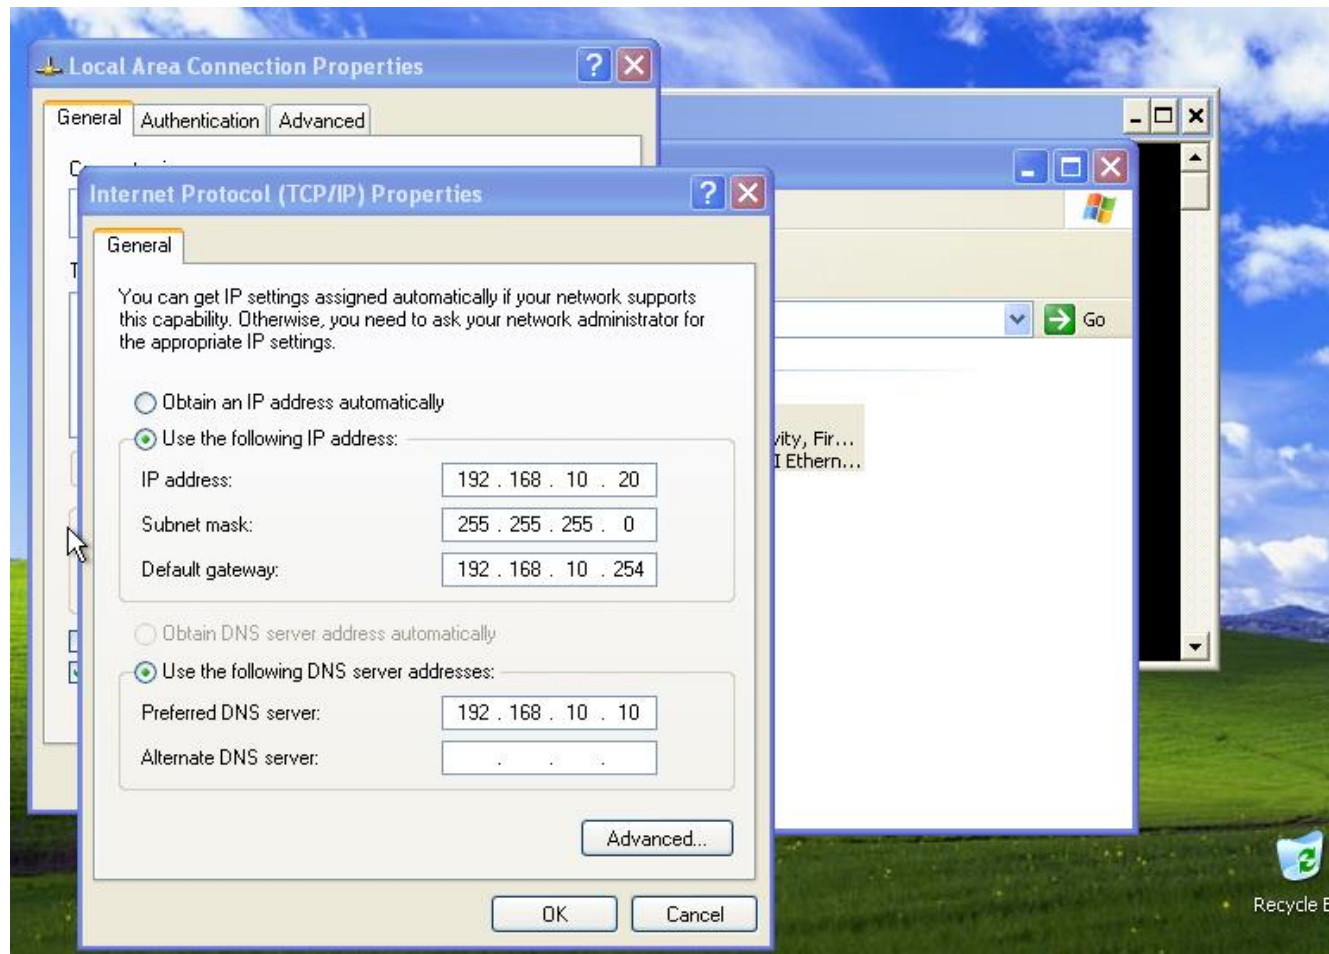

Verificacao das configuracoes da Placa de Rede

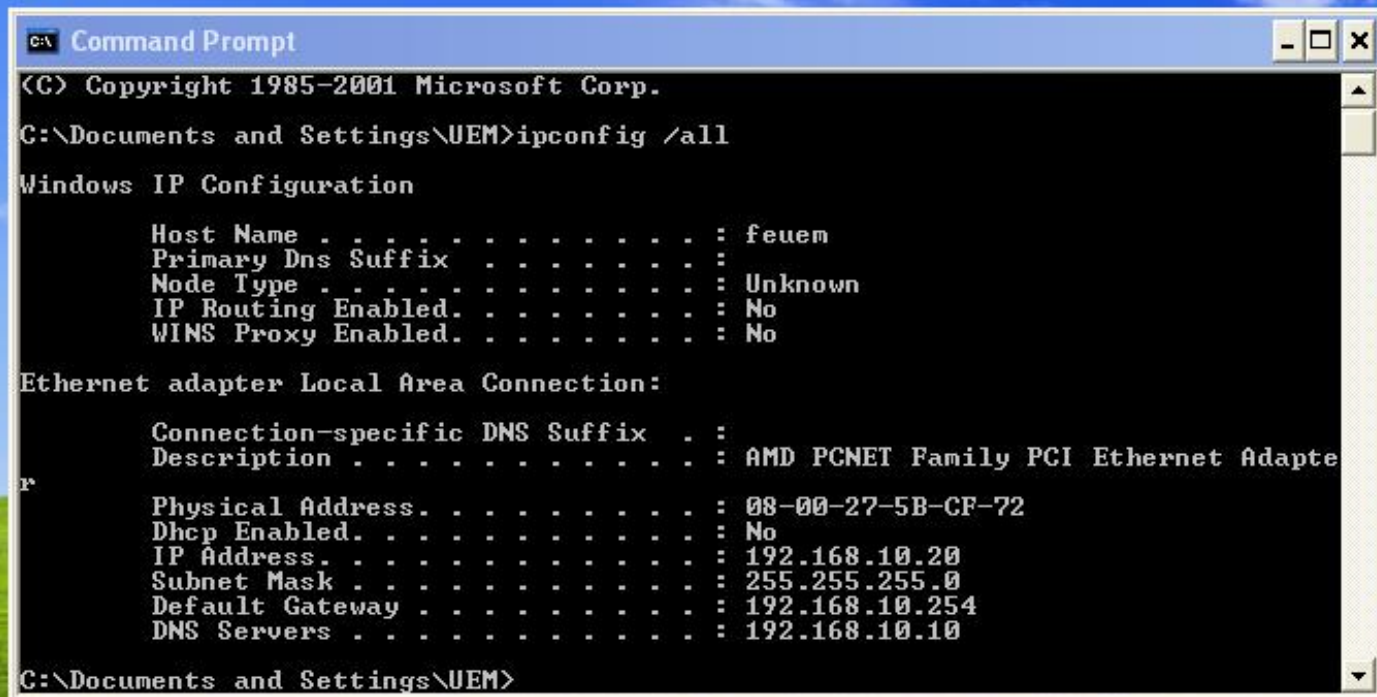

```
C:\ Command Prompt
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\UEM>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : feuem
    Primary Dns Suffix . . . . . :
    Node Type . . . . . : Unknown
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix . :
    Description . . . . . : AMD PCNET Family PCI Ethernet Adapte
    Physical Address. . . . . : 08-00-27-5B-CF-72
    Dhcp Enabled. . . . . : No
    IP Address. . . . . : 192.168.10.20
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.10.254
    DNS Servers . . . . . : 192.168.10.10

C:\Documents and Settings\UEM>
```

Teste de Conectividade com o servidor

```
Command Prompt
C> Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\UEM>ping 192.168.10.10

Pinging 192.168.10.10 with 32 bytes of data:

Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\UEM>ping ponbo

Pinging ponbo [192.168.10.10] with 32 bytes of data:

Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\UEM>ping feuem.ac.mz


Pinging feuem.ac.mz [192.168.10.10] with 32 bytes of data:

Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128
Reply from 192.168.10.10: bytes=32 time<1ms TTL=128


Ping statistics for 192.168.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\UEM>
```


Modificacao do Nome do Host

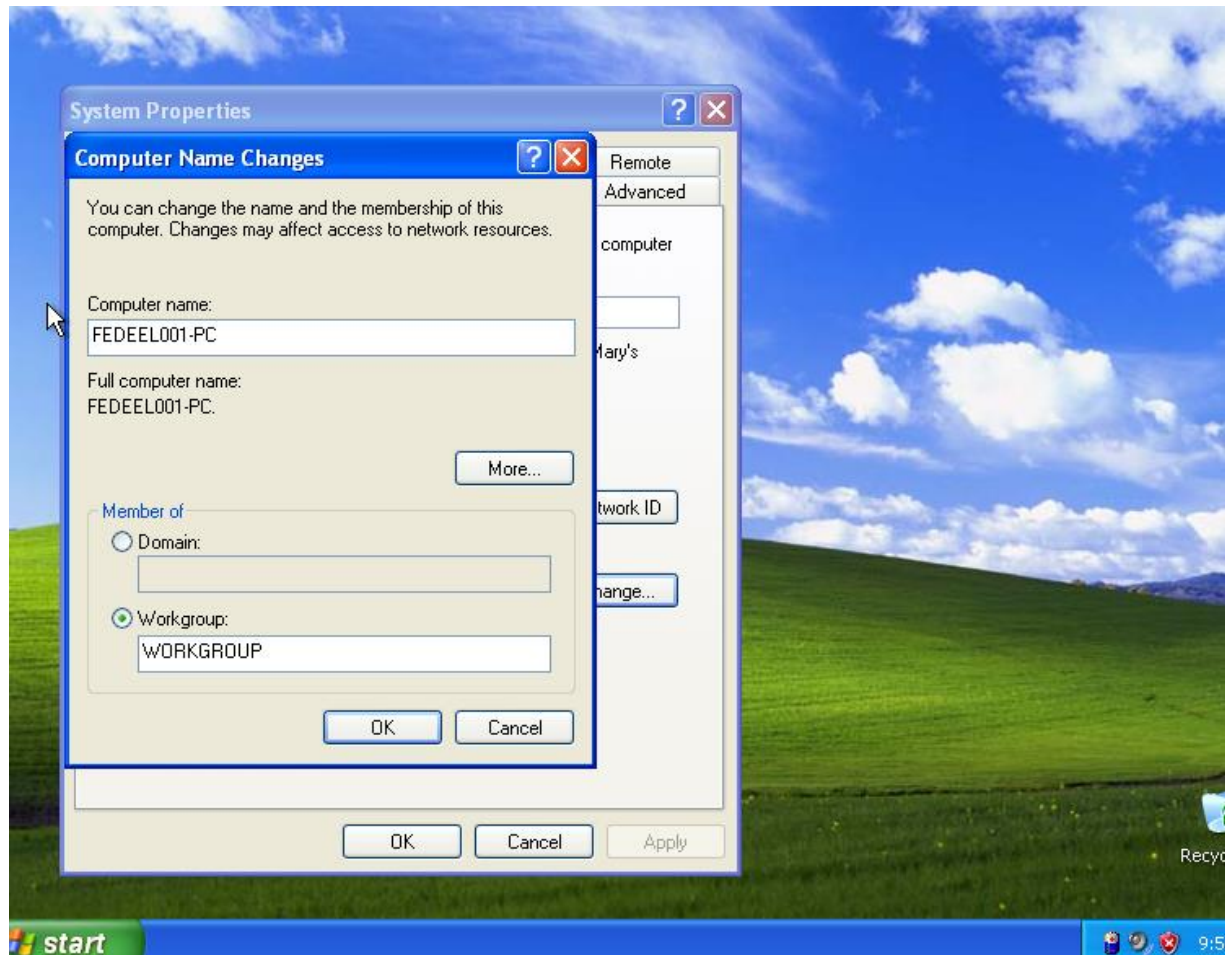


Ingressar a Maquina no Dominio

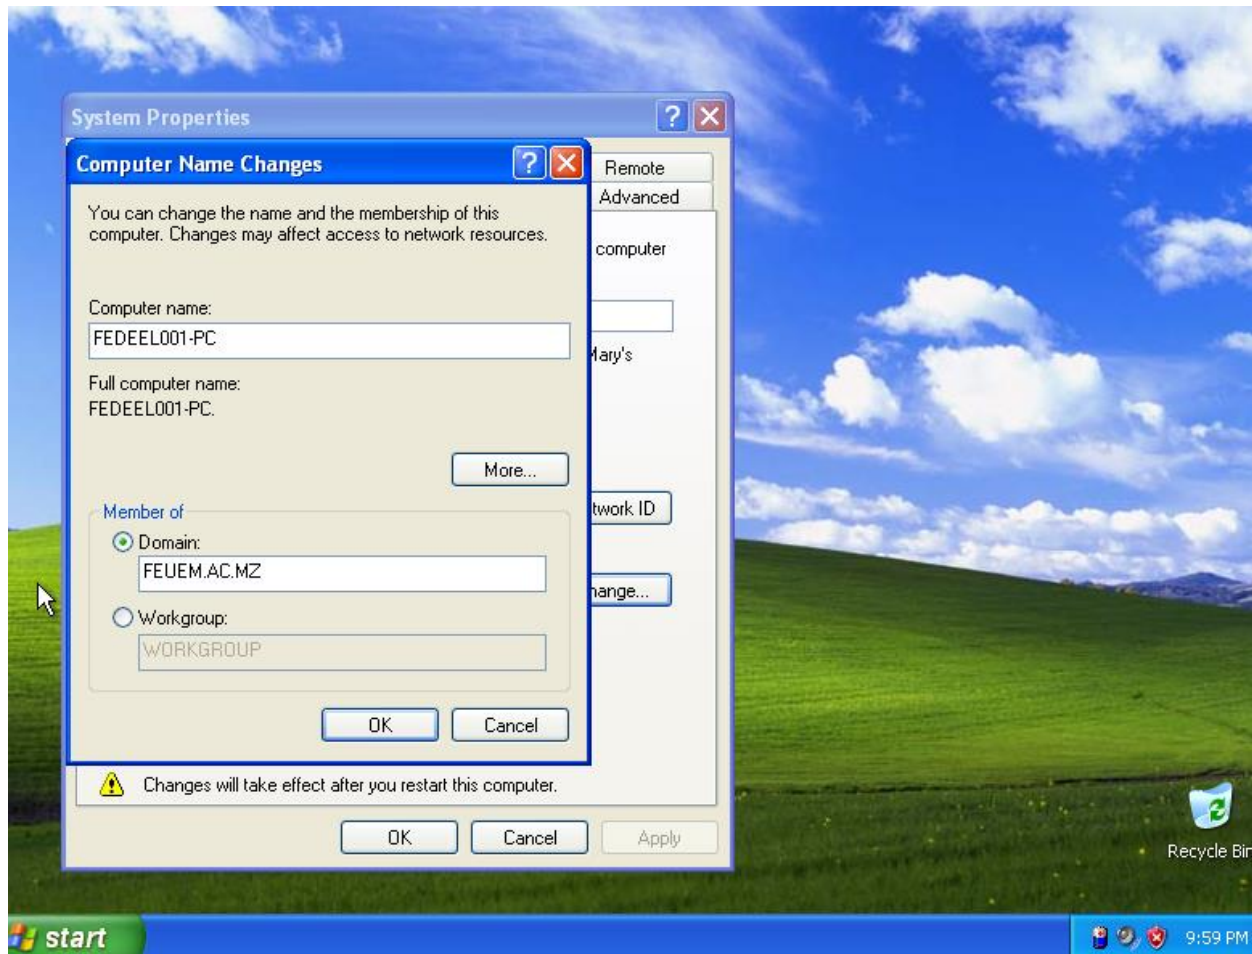


Ingressar a Maquina no Dominio

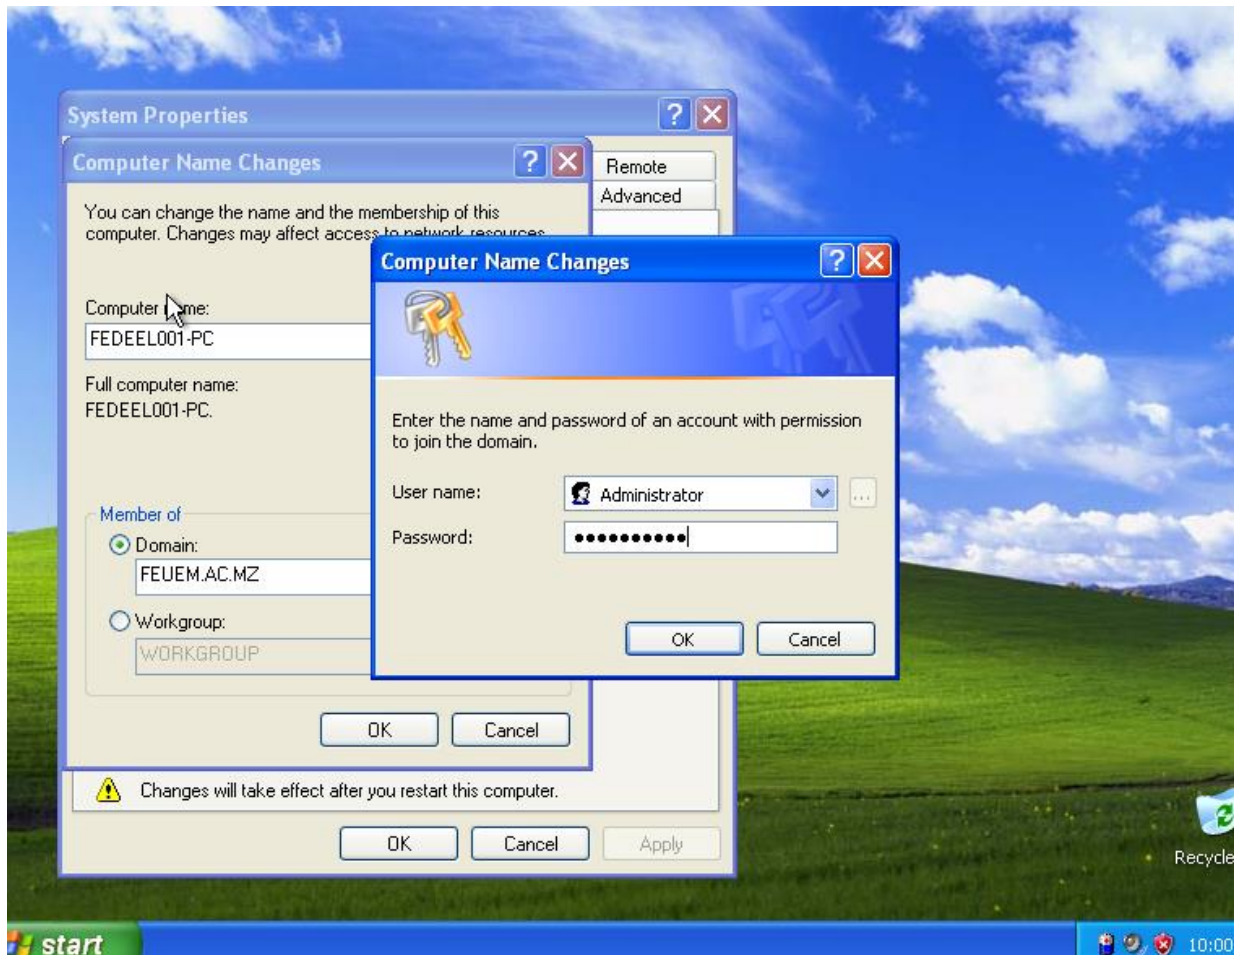

Maquina aceite pelo Servidor de Dominio

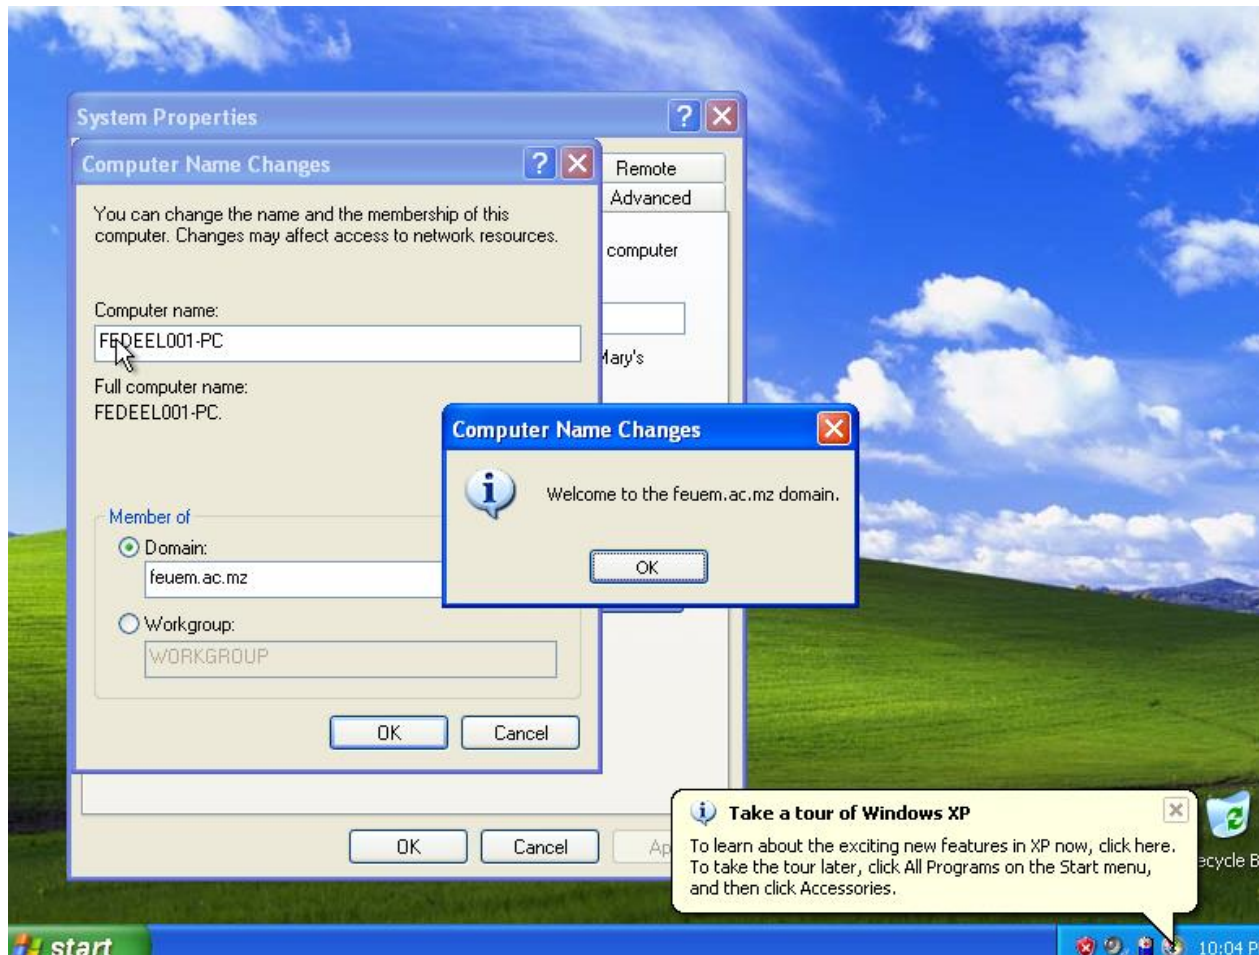

Verificar o Servidor de AD-DS

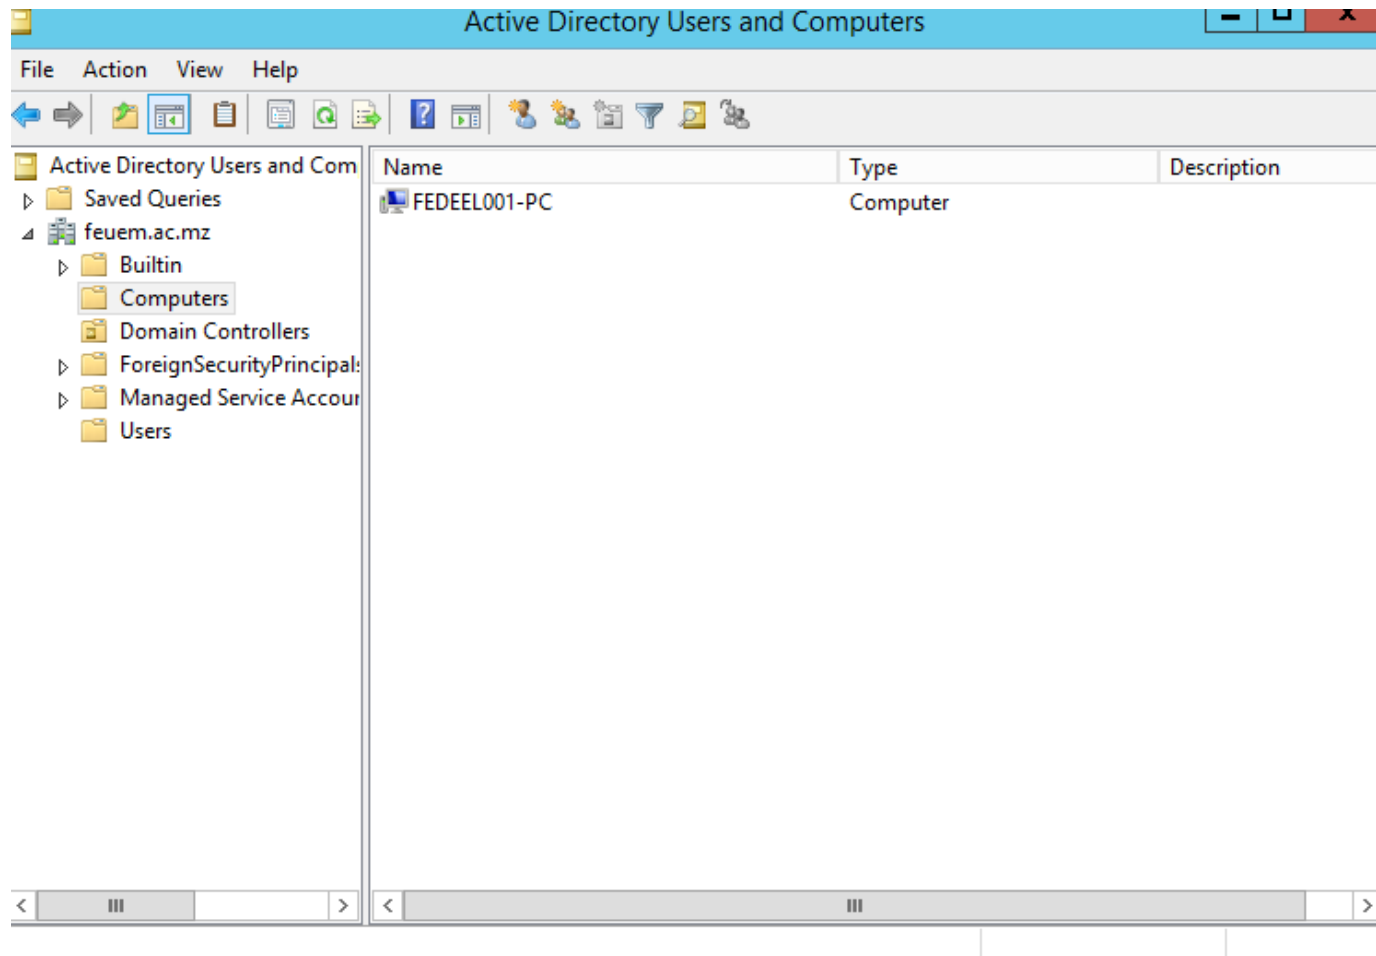

Login do Cliente



Log On to Windows



Copyright © 1985-2001
Microsoft Corporation

Microsoft

User name: UEM

Password:

Log on to: FEUEM

FEDEEL001-PC (this computer)

FEUEM


OK

Cancel

Shut Down...

Options <<

Credencias do Cliente

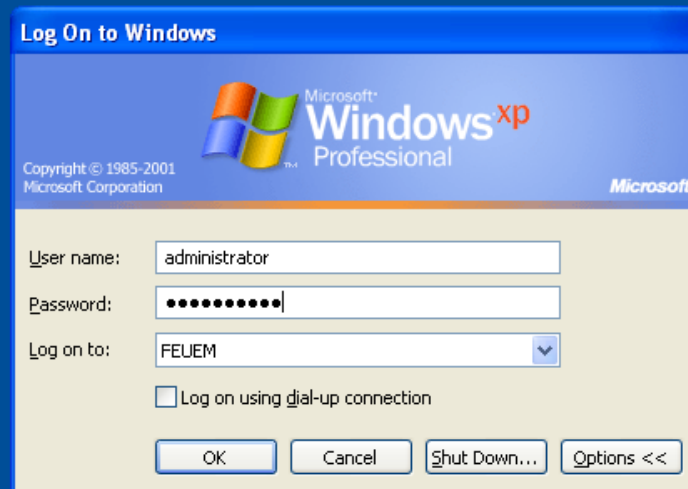

The image shows a Windows XP logon screen with a blue background. A mouse cursor is pointing at the left edge of the dialog box. The dialog box has a blue title bar that says "Log On to Windows". Inside, there is a header area with the Windows XP logo, the text "Microsoft Windows xp Professional", and copyright information "Copyright © 1985-2001 Microsoft Corporation" and the "Microsoft" logo. Below this, there are three input fields: "User name:" with "administrator", "Password:" with ten dots, and "Log on to:" with a dropdown menu showing "FEUEM". There is a checkbox for "Log on using dial-up connection" which is unchecked. At the bottom, there are four buttons: "OK", "Cancel", "Shut Down...", and "Options <<".

Log On to Windows

Microsoft Windows[®] xp Professional
Copyright © 1985-2001 Microsoft Corporation

User name: administrator


Password: ●●●●●●●●●●

Log on to: FEUEM


☐ Log on using dial-up connection


OK Cancel Shut Down... Options <<

Configuracoes do Computador do Cliente

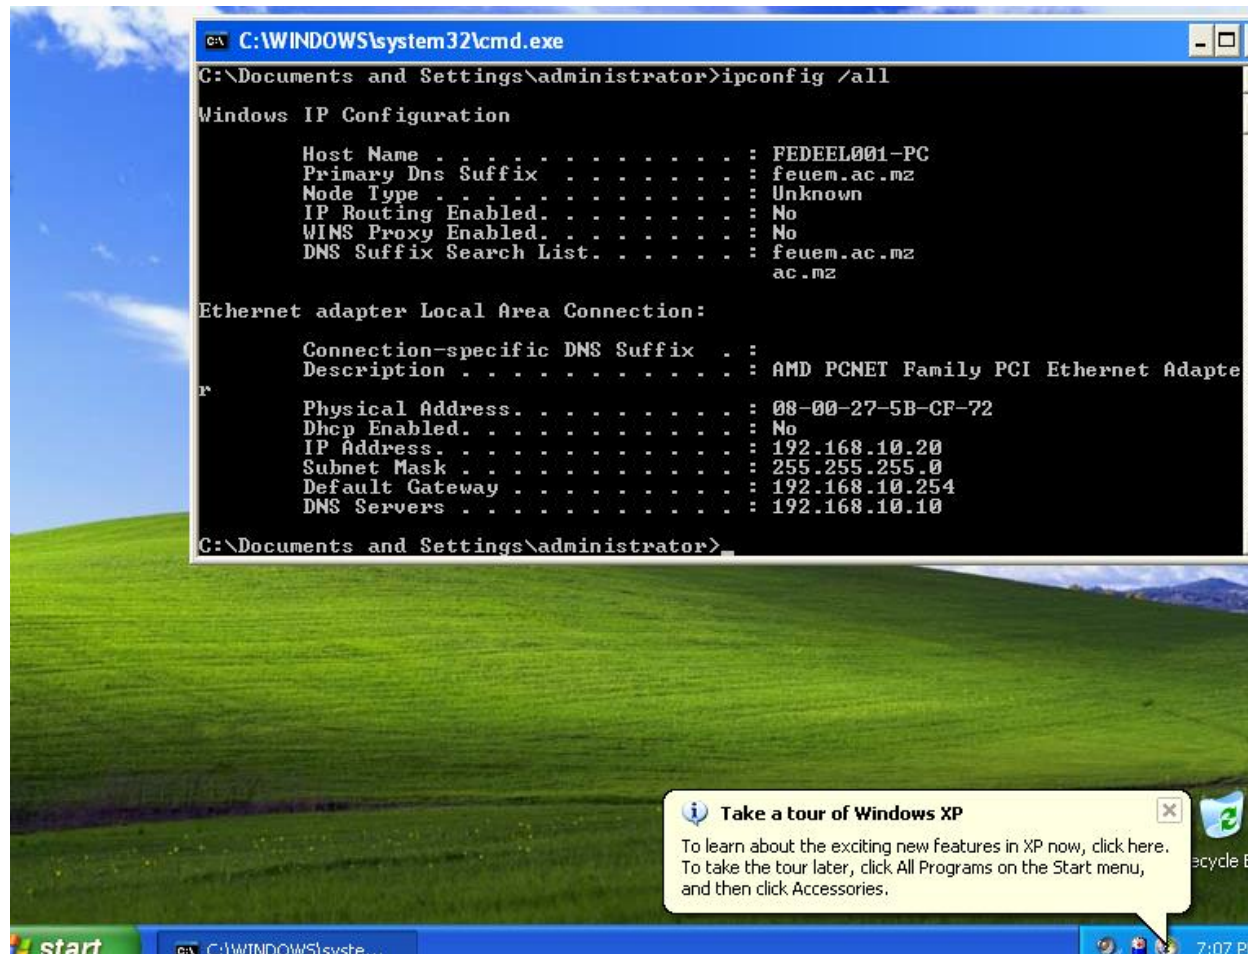

Criacao de um Computador no Servidor AD-DS

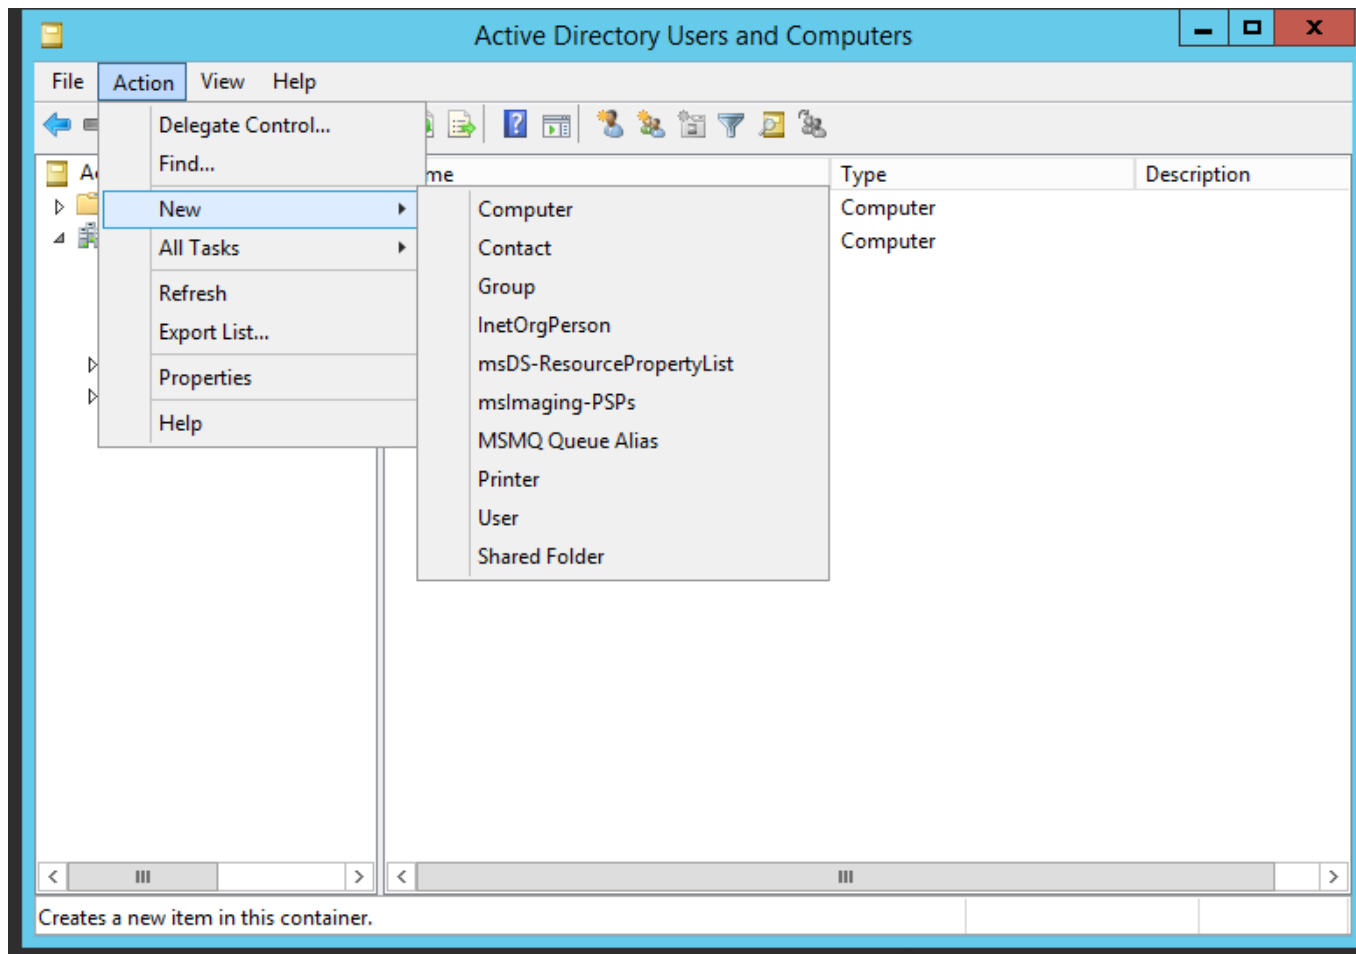

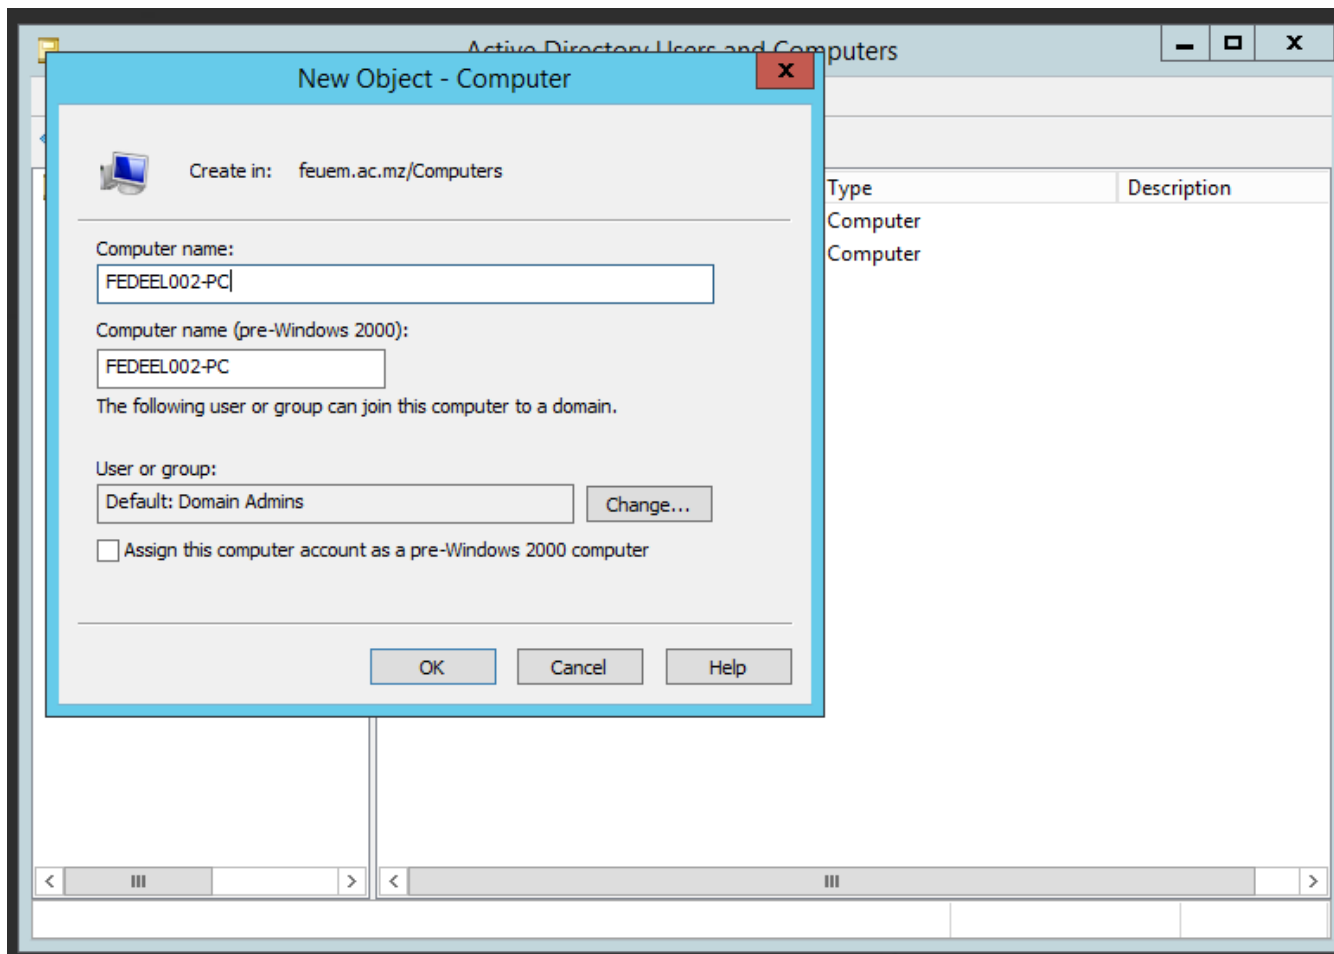

Questões

- Liste os procedimentos para ingressar uma maquina no dominio.