



PPC-T

PRODUCER SPEAKERS

PRICE & PERFORMANCE

Our In-Ceiling PPC-T Speaker Series prides itself on going above and beyond the competition, by blending integrator friendly features with overall musicality, at an exciting price point. Each model is a 2-way loudspeaker with Silk tweeter, and front Mounted 8 ohm, 70/100v Tap Switch.

PRODUCT ID



EASY UPGRADES

The PPC-T Series are built with a standard dog-leg installation, yet reuse the same install brackets and cut-out templates as our Origin PRO PC In-Ceiling speakers, leaving the door open for simple future upgrades. They also incorporate the same premium transformer as the rest of the Professional collection, ensuring a smooth consistent sonic signature for all of your installations, regardless of style or placement.

READY-TO-GO

Able to incorporate 8 ohm for residential projects, these PPC-T speakers also arrive ready for installation with a robust built-in transformer for even the most challenging commercial jobs. Ready-to-go, low-profile paintable grilles are included to reduce ceiling visibility.

BUNDLE IT UP

Pair these speakers with the powerful PSUB10x2 Subwoofer and an Origin PRO ProA Amplifier for the optimal sound experience, with both High-Z or Low-Z system flexibility.



PPC-T PRODUCER SPEAKERS

SPECIFICATIONS

PPC80T-8

PPC60T-8

<i>Model</i>	PPC80T-8	PPC60T-8
<i>Part</i>	PPC80T8000	PPC60T8000
<i>Tweeter</i>	1"(25mm) Silk	1"(25mm) Silk
<i>Woofers</i>	8" (203mm) Polypropylene	6.5" (165mm) Polypropylene
<i>Frequency Response</i>	72Hz-20kHz -3dB 50Hz-20kHz -10dB	79Hz-20kHz -3dB 59Hz-20kHz -10dB
<i>Power RMS Peak</i>	30W 100W	30W 100W
<i>Impedance</i>	8 ohm 70V	8 ohm 70V
<i>Transformer Taps</i>	30W, 15W, 7.5W, 3.75W	30W, 15W, 7.5W, 3.75W
<i>Mounting Depth</i>	4" (102mm)	3.27" (83mm)
<i>Cut-Out Diameter</i>	10.3" (262mm)	8.7" (221mm)

SPECIFICATIONS







PPC60TDT

PPC50T-8

<i>Model</i>	PPC60TDT	PPC50T-8
<i>Part</i>	PPC60TDT10	PPC50T8000
<i>Tweeter</i>	Dual 1"(25mm) Silk	0.75" (20mm) Silk
<i>Woofers</i>	6.5" (165mm) Polypropylene	5.25" (133mm) Polypropylene
<i>Frequency Response</i>	79Hz-20kHz -3dB 53Hz-20kHz -10dB	82Hz-20kHz -3dB 62Hz-20kHz -10dB
<i>Power RMS Peak</i>	30W 100W	30W 100W
<i>Impedance</i>	8 ohm 70V	8 ohm 70V
<i>Transformer Taps</i>	30W, 15W, 7.5W, 3.75W	30W, 15W, 7.5W, 3.75W
<i>Mounting Depth</i>	3.38" (86mm)	3.13" (79mm)
<i>Cut-Out Diameter</i>	8.7" (221mm)	7.4" (187 mm)

PPC-T PRODUCER SPEAKERS

LINE DRAWINGS

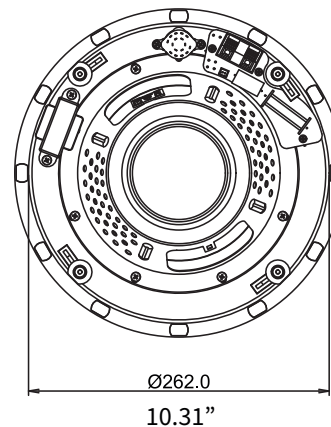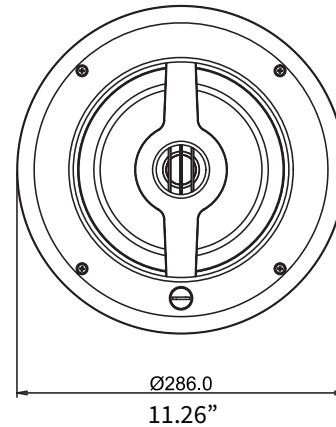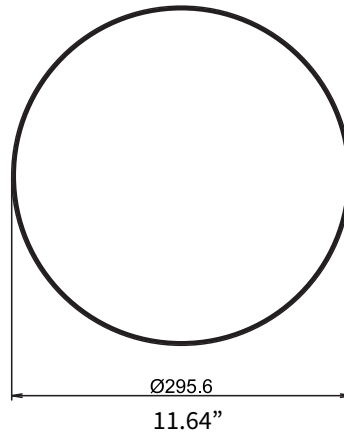


PPC80T-8



Please see www.originpro.com for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.

PPC-T PRODUCER SPEAKERS


LINE DRAWINGS

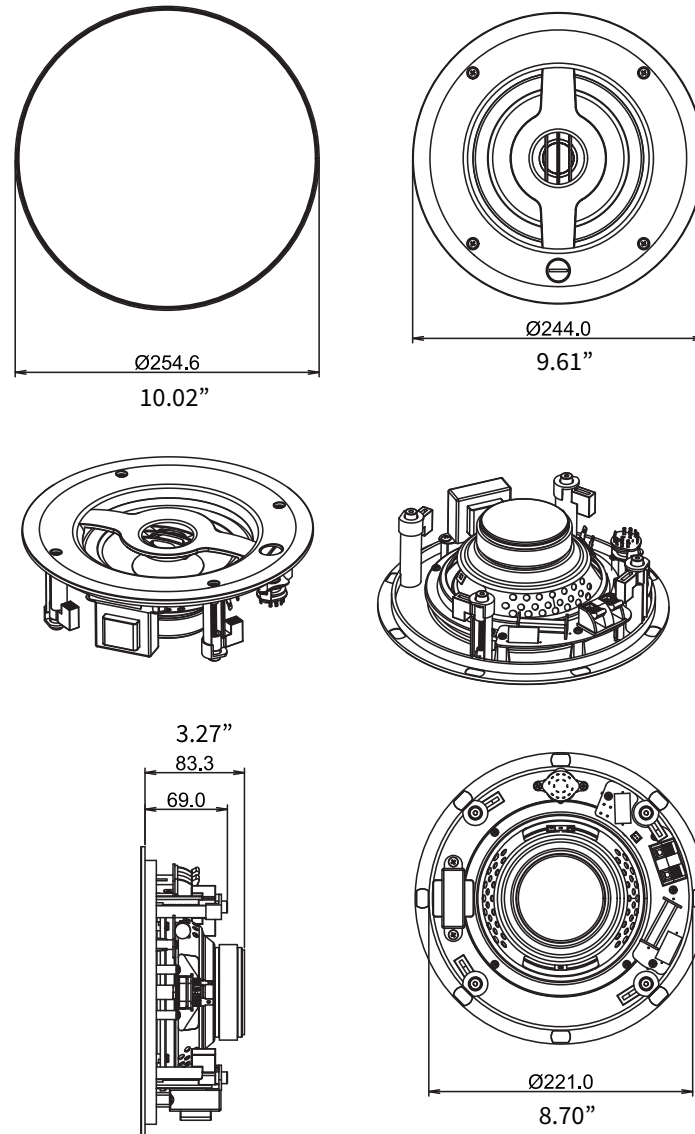**PPC60T-8**

Please see www.originpro.com for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.

PPC-T PRODUCER SPEAKERS


LINE DRAWINGS

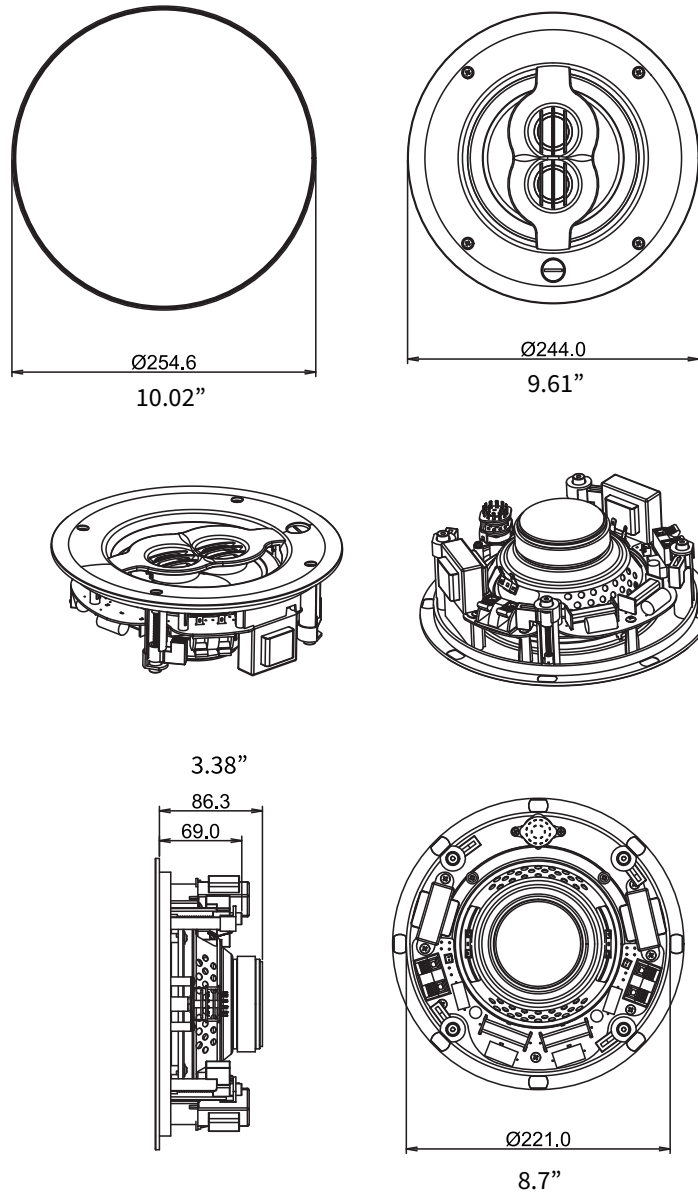**PPC60TDT**

Please see www.originpro.com for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.

PPC-T PRODUCER SPEAKERS

LINE DRAWINGS

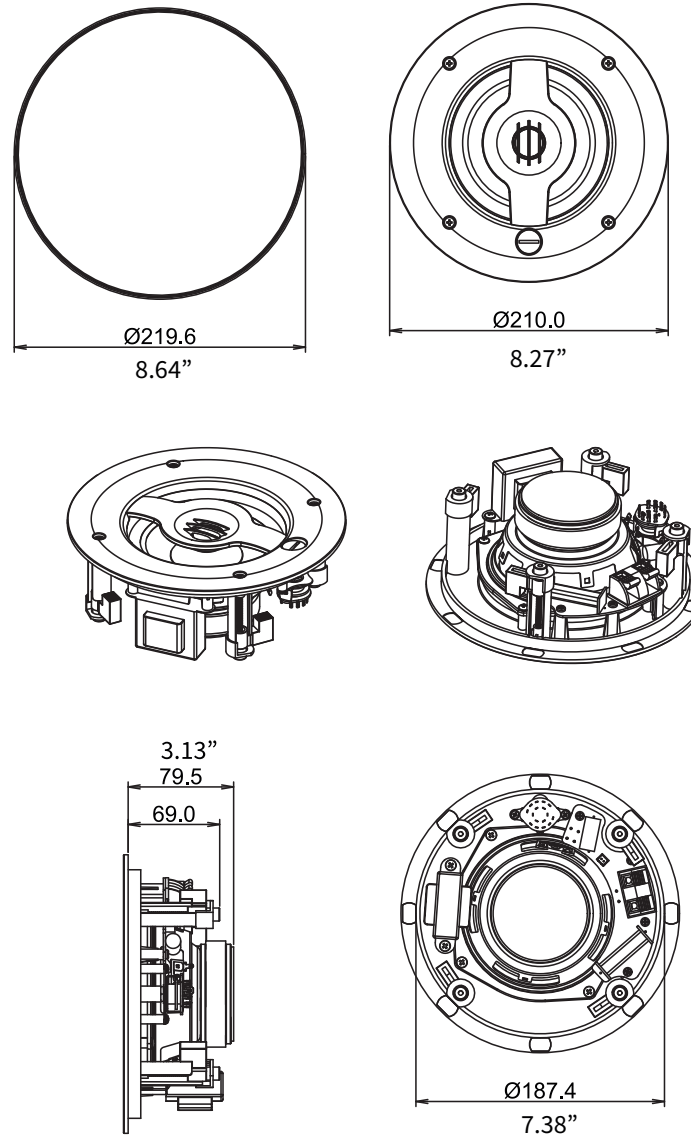

PPC50T-8



Please see www.originpro.com for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.