



SUBWOOFER AMPLIFIERS

OVERVIEW

Workhorses. Our twelve and two-channel foundation amplifiers are built just to work. No coloration, no processing, only clean audio amplification for everyday use.

PRODUCT ID



SUBA-150



SUBA-500

ONE IS ALL YOU NEED

Channel that is, you could always use more subwoofers. The SUBA-150 & SUBA-500 are diverse, powerful, and easy to use.

With DSP controls for phase and cross-over, 1U rack space requirements, and a clean 150W or 500W of power, these amplifiers are the perfect choice for several in-line architectural subwoofers.

SUBWOOFER AMPLIFIERS




SPECIFICATIONS

SUBA150

Part	AMPSUB1X150
Channels	1 (2 Shared Posts)
Continuous Power Output	80 watts RMS at 8Ω 150 Watts RMS @ 4Ω (1 speaker x 4Ω or 2 speakers x 8Ω)
Input Sensitivity	140 mV for full output (L/LFE only driven), 150 W, with level control set to max
Frequency Response	30-200Hz (EQ MODE set to BYPASS)
Distortion	.10% THD+N 1W/2W 100 H
Auto On Sensitivity	4 mV
External Trigger Voltage	12V +/-1.2V no load 10.5 V with 100 mA load
12V Trigger Threshold	2.6 V
Current Limit Threshold	3.5 Ω (4Ω minimum speaker load)
Dimensions	16.9" W (19" including rack mounts) 1.75" H (2.1" including feet) 8.1" D (front switch to rear chassis) 8.9" D (front switch rear speaker connector)
Weight	5.9 lbs
Certification	TUV Listed and tested under UL/EN60065 for US and Canada

LINE DRAWINGS

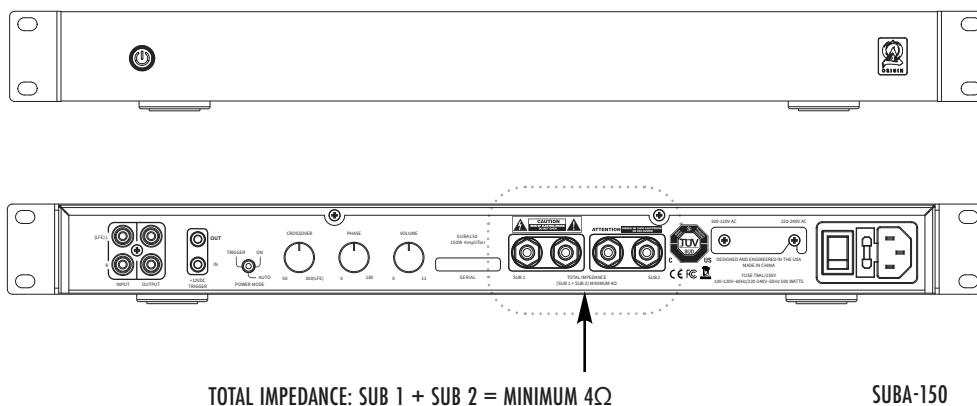

Please see originacoustics.com or scan the QR code using your smart device for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.




SUBWOOFER AMPLIFIERS

SPECIFICATIONS

SUBA500

Part	AMPSUB1X500
Channels	1 (2 Shared Posts)
Continuous Power Output	250 watts RMS at 8Ω / 500 watts RMS at 4Ω (1 speaker x 4Ω or 2 speakers x 8Ω)
Input Sensitivity	100 mV for 500W output 4 ohms (< 0.5% THD)
Input Impedance	15,000 ohms
S/N Ratio	88 dB (5 kHz bandwidth relative to 500W @ 4Ω)
Frequency Response	-1.1dB at 300 Hz (Flat EQ, LFE Crossover Setting) -1.5dB at 20 Hz
Distortion	< 0.2%
Auto On Sensitivity	< 5.5 mV (Left) < 22 mV (Right)
External Trigger Voltage	12V +/-1.2V no load 10.5 V with 100 mA load
12V Trigger Threshold	2.6 V
Current Limit Threshold	3.5 Ω (4Ω minimum speaker load)
Front End Overload	3.6 V RMS (L + R, 20 Volume, 40 Hz Signal, Flat EQ, LFE Crossover)
Dimensions	16.9" W (19" including rack mounts) 1.75" H (2.1" including feet) 8.1" D (front switch to rear chassis) 8.9" D (front switch rear speaker connector)
Weight	8.5 lbs
Certification	TUV Listed and tested under UL/EN60065 for US and Canada

LINE DRAWINGS

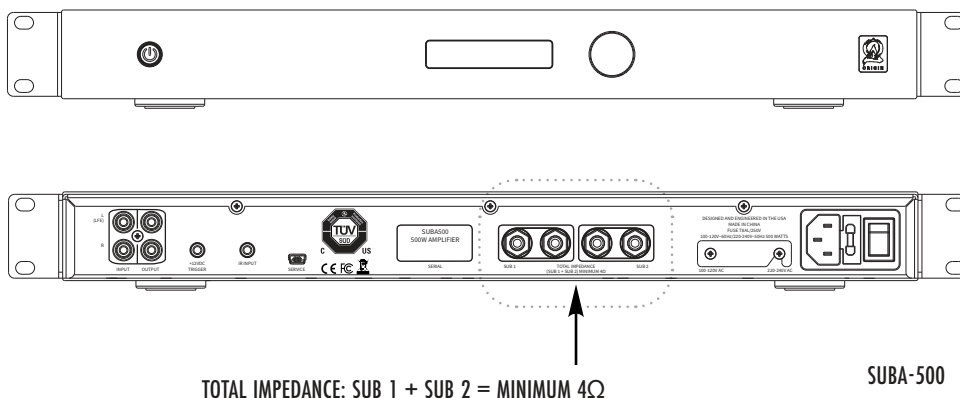

Please see originacoustics.com or scan the QR code using your smart device for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.