


A dark, textured stone sculpture, possibly a piece of basalt or a similar volcanic rock, is positioned on a light-colored floor. The sculpture has a rough, uneven surface and a somewhat conical shape. It is set against a dark, textured wall. The lighting is dramatic, highlighting the texture of the stone and the wall.

OMOGENEA COLLECTION

60 X 120 cm / 120 X 180 cm / 120 X 240 cm

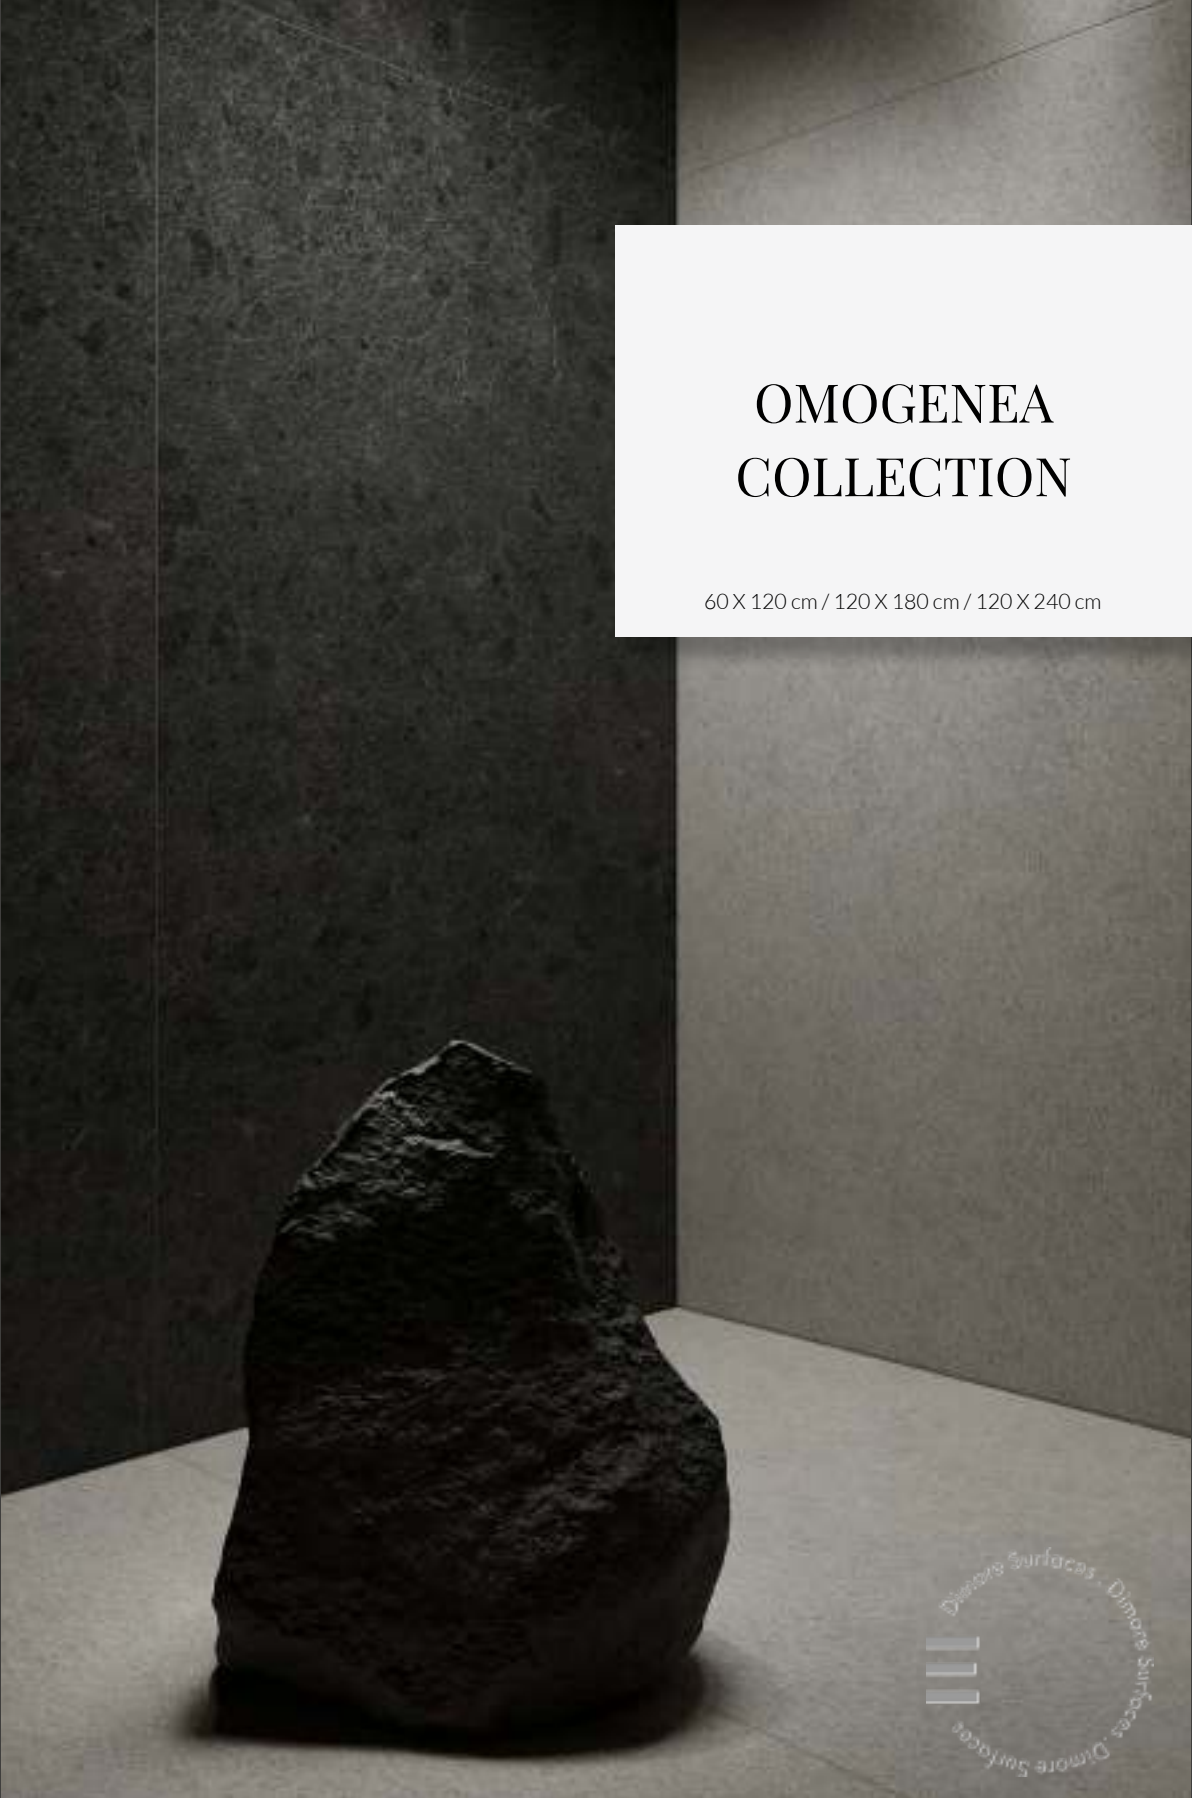

OMOGENEA COLLECTION

Surface Inspired Beyond Ordinary

DIMORE

A person is walking away from the viewer, illuminated by a large, bright beam of light that originates from the left side of the frame. The beam creates a strong contrast with the dark background, casting a long shadow of the person onto the ground. The person is wearing a light-colored jacket and dark pants. The overall mood is contemplative and forward-looking.

WE GO
BEYOND EXCESS!

DIMORE

DIMORE surfaces stepping away from what a typical journey of tiles will look like. We are redefining luxury surfaces through a perfect blend of innovative craftsmanship, technical precision, testing and catering to constantly changing user centric needs.

Every piece we create is beyond the edge. We push boundaries to innovate and mastered in crafting surfaces beyond design excellence, crafted with passion and precision.

We take pride in our ability to seamlessly merge form and function, beyond the ordinary of what's possible while maintaining the rich heritage of craftsmanship that defines us. With Dimore, going beyond excess isn't just an option, it's part of the plan!



OMOGENEA

The Omogenea Series is a masterful creation born from the awe-inspiring forces of volcanic eruptions, where the designer undertook an intense exploration to study the raw power of nature itself. He delved deep into the intricate science of volcanic processes, carefully researching the cooling and fracturing of molten rock to understand every jagged contour and smoothened edge nature left behind.

Through extensive study of both natural formations and ancient volcanic landscapes, he replicated the immense strength and delicate grace that result from these primal forces.

Every surface is a testament to this dedication, where the fire of creation meets the earth's resilience, bringing the eternal beauty of volcanic forces into your spaces with an unmatched presence.

THE DESIGNER

Award - winning Danish designer and visual artist Sebastian Holmbäck has spent over three decades shaping design at the highest level.

His work spans furniture, lighting, interiors, product, & exhibition design, always guided by the core values of Danish design: Simplicity, Elegance, & Purpose.

His pursuit of emotional clarity in design has earned him global recognition, including 5 Red Dot Awards (one best of the best), 2 iF Design Awards, a German Design Award- Special Mention, and the title of Designer of the Year by Boligmagasinet.

His work has also been celebrated by Tableware International, GIA, Accent on Design (NY), and Formland.

His philosophy comes alive in Omogenea - a surface collection born from volcanic stones, where material becomes meaning. Minimal yet deeply expressive, Omogenea explores surface and sensation. It invites touch, reflection, and presence reconnecting us with the physical touch in a world often ruled by visuals.

Sebastian H
SEBASTIAN HOLMBÄCK

THE PROCESS



Ideation



Concept Building



Exploration



Material Selection



Refinement



Technical examination



Final Form

TECHNOLOGY

SINTERED STONE

Undergoes intense high-temperature heating above 1200°C and is pressure bonded under 44,000 tons, resulting in a robust, naturally fused material, utilizing a unique sand clay formation and advanced Italian GEA PRESS technology, creates a highly durable surface.

DRY GRANULAR

Dry Granular technology employs a distinct glazing method to prevent light distortion resulting in HD mirror like reflection and durable finish.

What does it actually mean?

- **Granulating Glaze Material**
Grind the glaze material into fine granules using a grinder or mill machine.
- **Application of Dry Glaze**
Sprinkle or apply the dry glaze granules evenly onto the surface of the ceramic tiles using a controlled method such as spraying or dusting.
- **Pressing and Adhering**
Press the granules gently onto the surface of the tiles to ensure adhesion and uniform coverage.
- **Drying Stage**
Allow the glazed tiles to dry completely, ensuring that the granules adhere securely to the surface.
- **Firing Process**
Once dry, fire the tiles in a kiln or furnace at high temperatures to fuse the glaze granules onto the ceramic surface, creating a smooth surfaces.

KEY FEATURES



Crafted In
Sassuolo, Italy

Proudly crafts all its products, harnessing the essence of Italian design excellence.



Scratch - resistant

Endures scratches, stains, and extreme temperatures, ensuring a long-lasting, low-maintenance surface.




Stain - resistant

Requires minimal care with stain-resistant and durable surfaces, ideal for high-traffic areas.



Consistent
Uniformity

Homogeneous composition ensuring consistent color, pattern and texture throughout.



Unmatched
Design Flexibility

Uniform designs and finishes across various sizes, enabling versatile and seamless combinations.




Modular Sizes
& thickness

Available in large-format slabs and diverse thicknesses for versatile design applications.



Diverse Design
Palette

Offers an extensive array of design choices, simulating natural stone, wood, concrete and more.



Robust
Durability

Endures scratches, stains, and extreme temperatures, ensuring a long-lasting, low-maintenance surface.



Versatile

Suited for both indoor and outdoor applications due to its weather resistant and UV-stable properties.

OMOGENEA COLLECTION

Naturally full-body, the Omogenea collection ensures that the color and design are not just surface traits, but are consistent throughout, from top to bottom.



CONVERGENCE OF LUXURY & DURABILITY

The Omogenea Series is a stunning tribute to the raw power of volcanic eruptions. Sebastian studied volcanic processes, replicating the intricate cooling and fracturing of molten rock to capture nature's strength and delicate beauty. Each piece reflects the balance between fire and earth, bringing the timeless beauty of volcanic forces into your space.



SURFACE SPECTRUM



OMOGENEA SURFACE

Full body by nature, "Omogenea Collection" ensures that the color and design are not just surface traits, but run consistently from top to bottom.


OVERVIEW



Omogenea's collection features six meticulously crafted surfaces: Luce Lavica, Limo Profondo, Basalto Grigio, Ombra Castano, Fango Antico & Granito Carbone replicating the solidified texture of cooled basaltic lava, emulating the fluid, incandescent appearance of flowing intermediate volcanic rock.


LUCE LAVICA

Finish:
Omogenea




LIMO PROFONDO

Finish:
Omogenea




BASALTO GRIGIO

Finish:
Omogenea



OMBRA CASTANO

Finish:
Omogenea



FANGO ANTICO

Finish:
Omogenea



GRANITO CARBONE


Finish:
Omogenea





LUCE LAVICA/ FLOOR & WALL
(120X240CM)

LUCE LAVICA

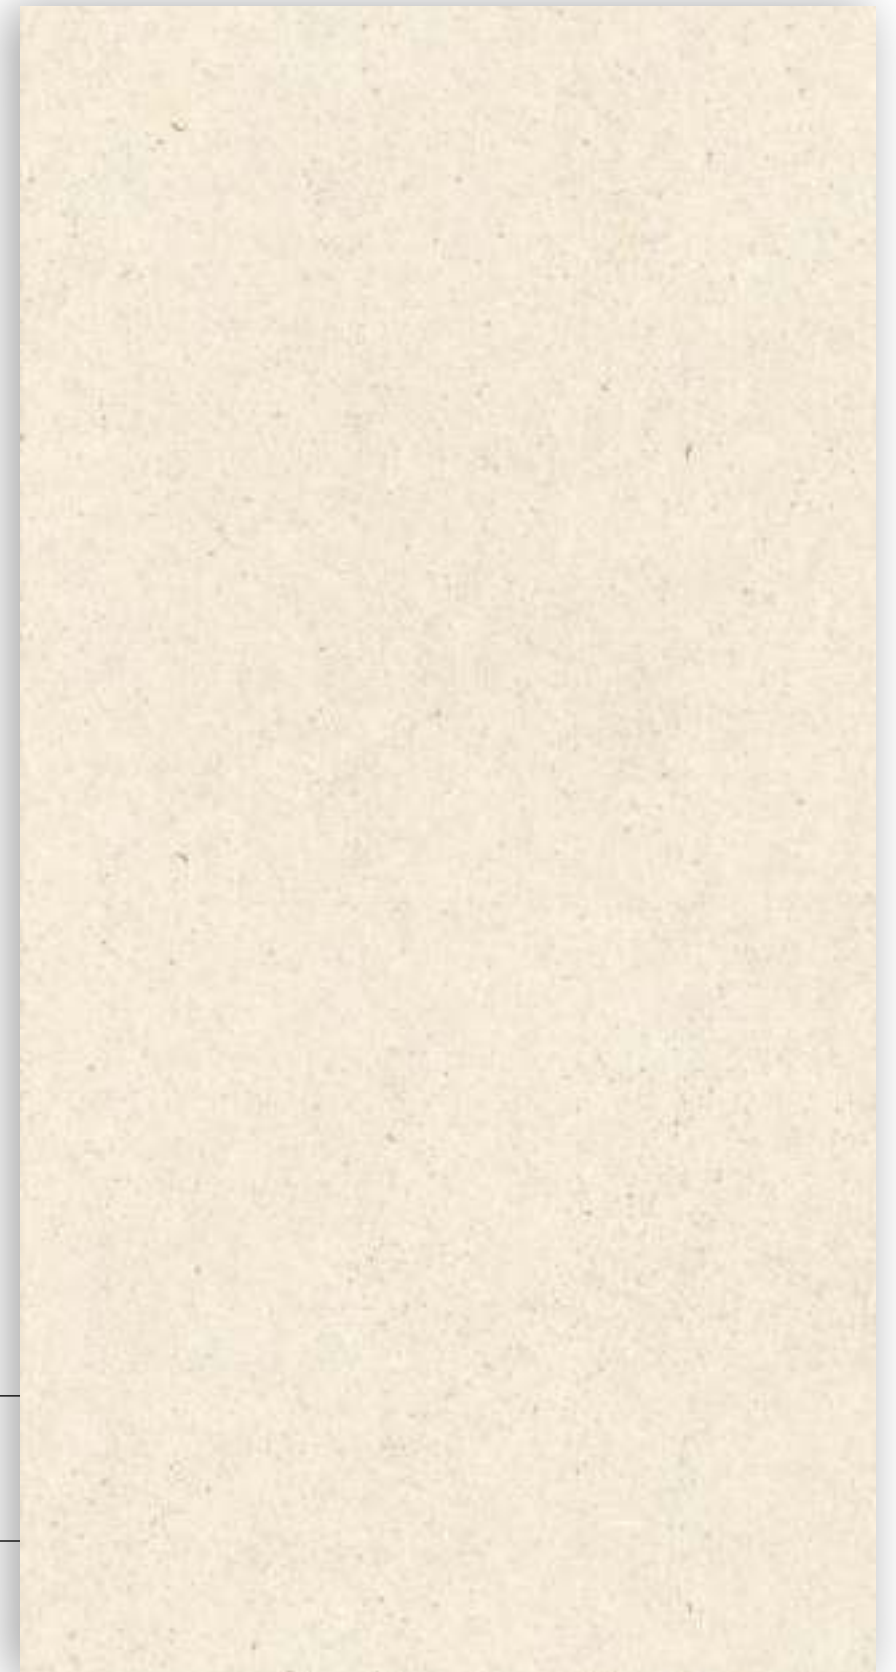

Sizes

60 X 120 CM (2'X4')
120 X 180 CM (4'X6')
120 X 240 CM (4'X8')

Finish

OMOGENEA

Available in 4 faces





LIMO PROFONDO/ FLOOR & WALL
(120X240CM)

LIMO PROFONDO



Sizes

60 X 120 CM (2'X4')
120 X 180 CM (4'X6')
120 X 240 CM (4'X8')

Finish

OMOGENEA

Available in 4 faces





BASALTO GRIGIO/ FLOOR & WALL
(120X240CM)

BASALTO GRIGIO



Sizes


60 X 120 CM (2'X4')
120 X 180 CM (4'X6')
120 X 240 CM (4'X8')

Finish

OMOGENEA

Available in 4 faces



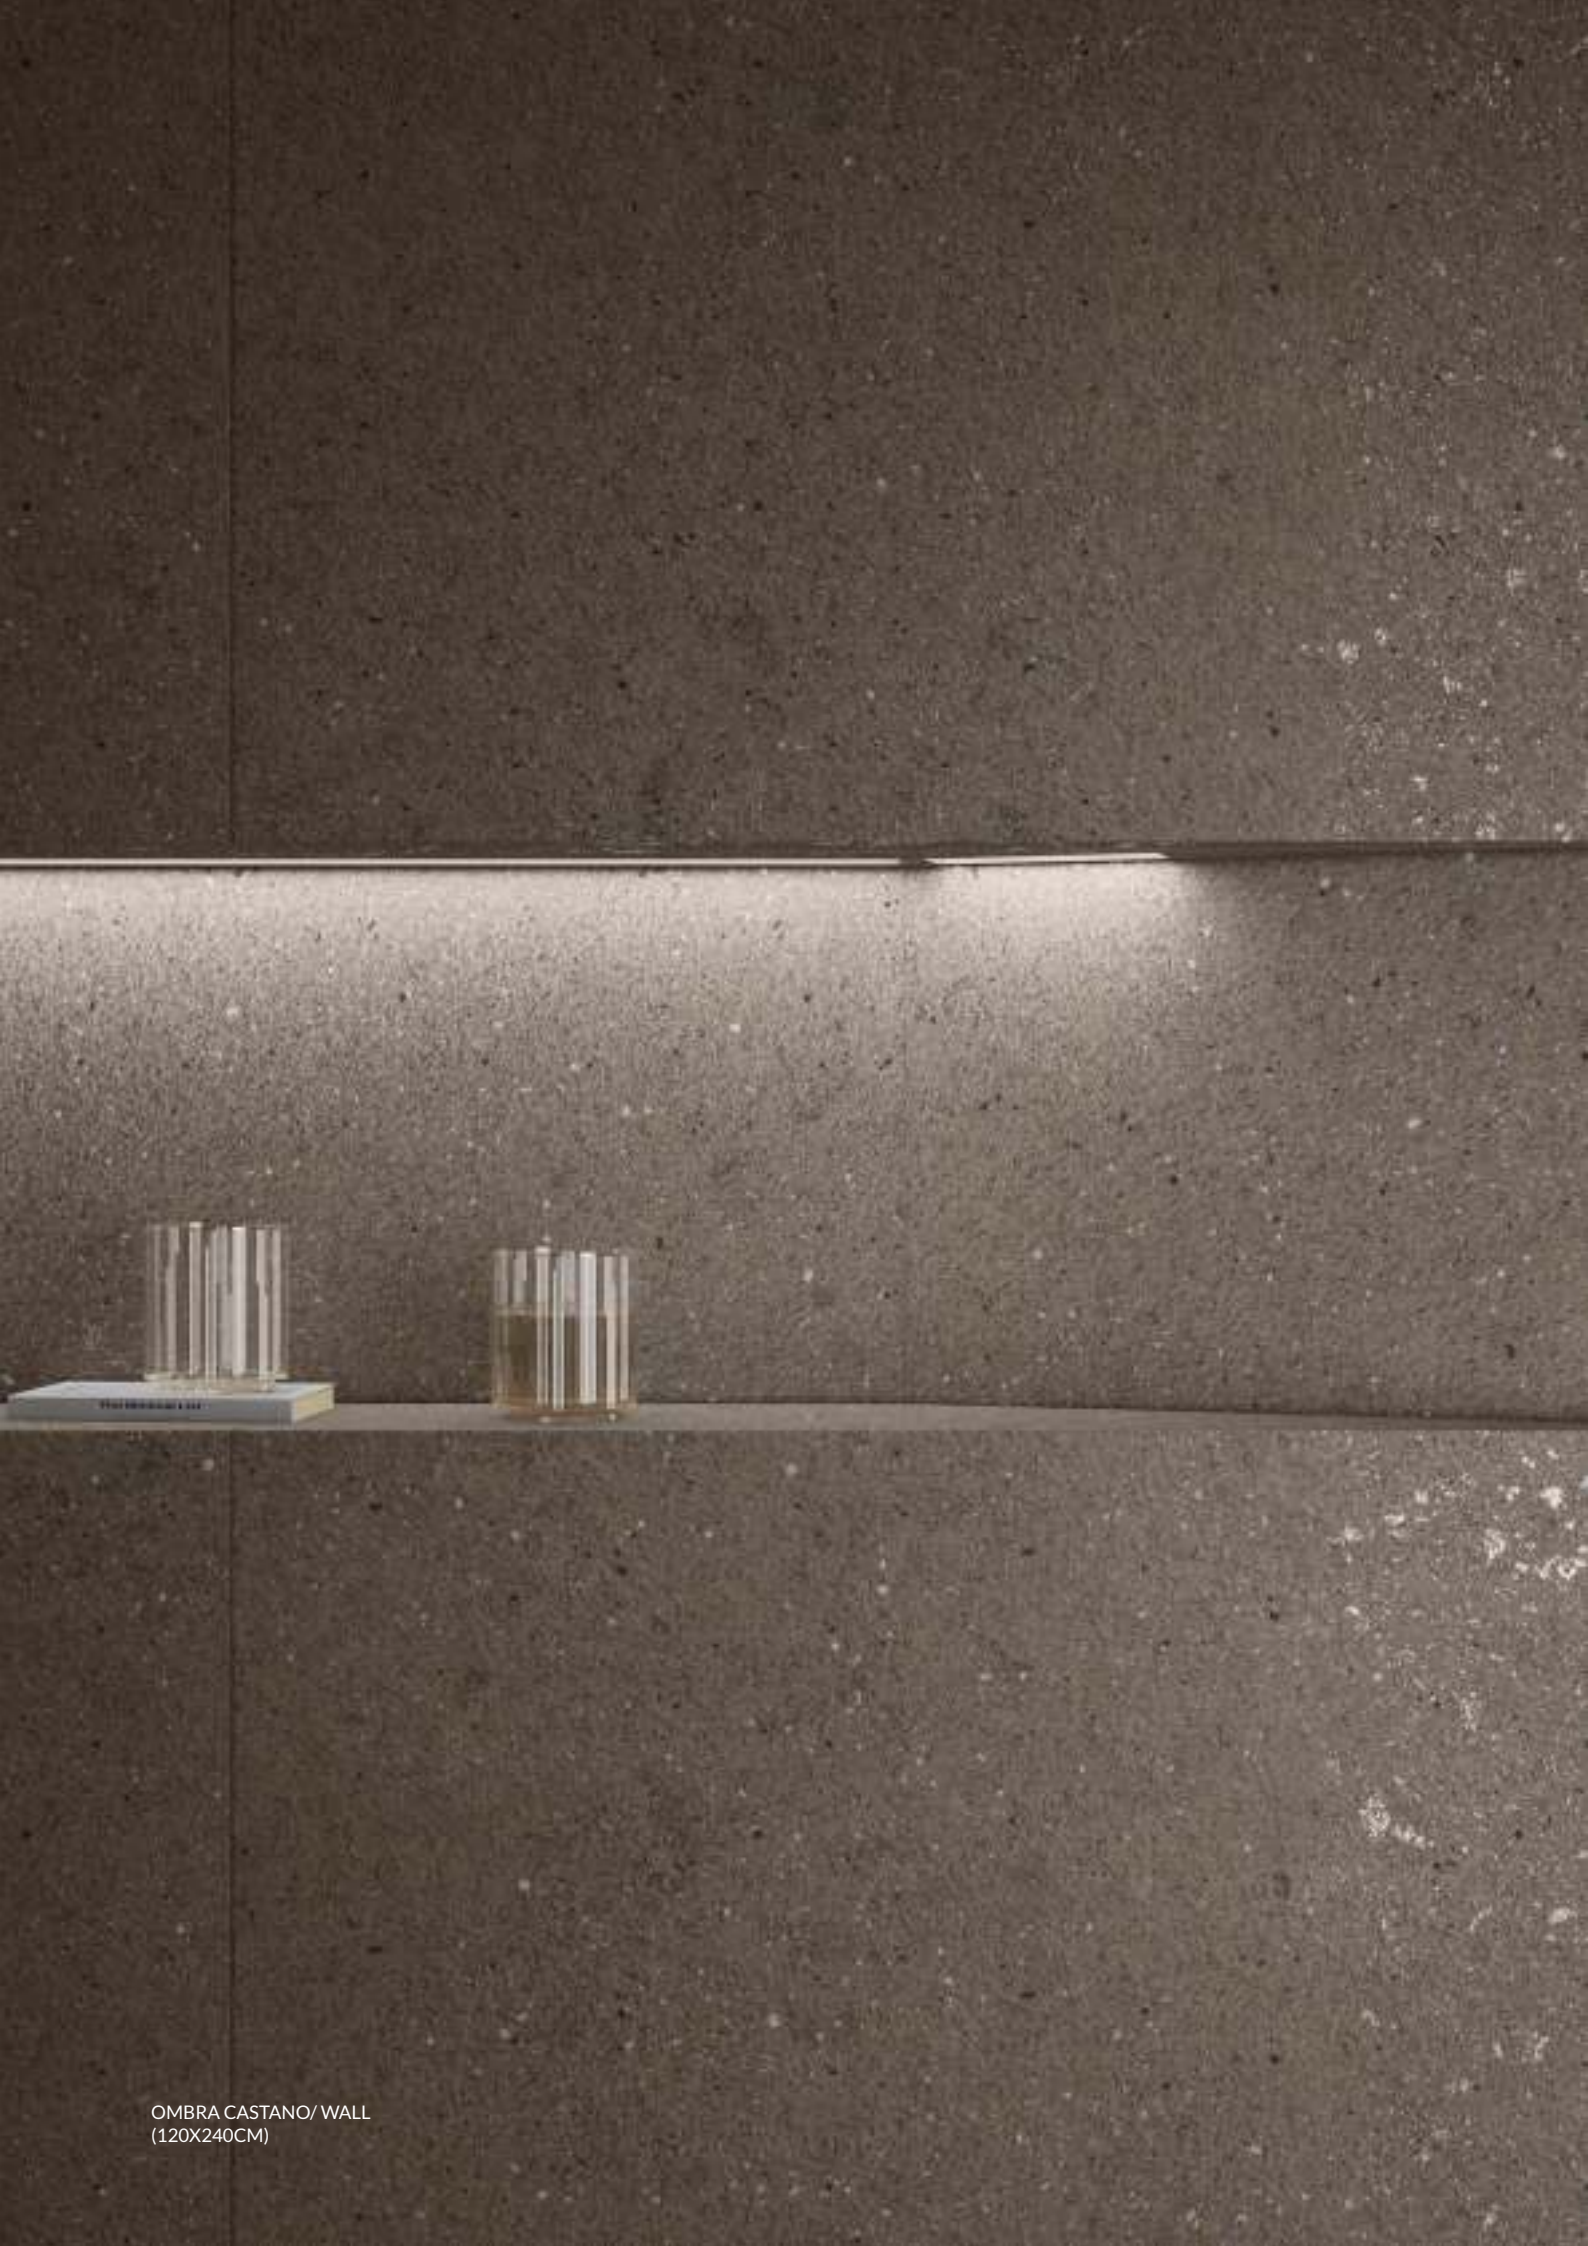

OMBRA CASTANO/ WALL
(120X240CM)

OMBRA CASTANO



Sizes
60 X 120 CM (2'X4')
120 X 180 CM (4'X6')
120 X 240 CM (4'X8')

Finish
OMOGENEA

Available in 4 faces





FANGO ANTICO/WALL
(120X240CM)

FANGO ANTICO



Sizes
60 X 120 CM (2'X4')
120 X 180 CM (4'X6')
120 X 240 CM (4'X8')

Finish
OMOGENEA

Available in 4 faces



FANGO ANTICO/ FLOOR & WALL
(120X240CM)



GRANITO CARBONE/ FLOOR & WALL
(120 X 240CM)

GRANITO CARBONE



Sizes

60 X 120 CM (2'X4')
120 X 180 CM (4'X6')
120 X 240 CM (4'X8')


Finish

OMOGENEA

Available in 4 faces



PRODUCT APPLICATIONS

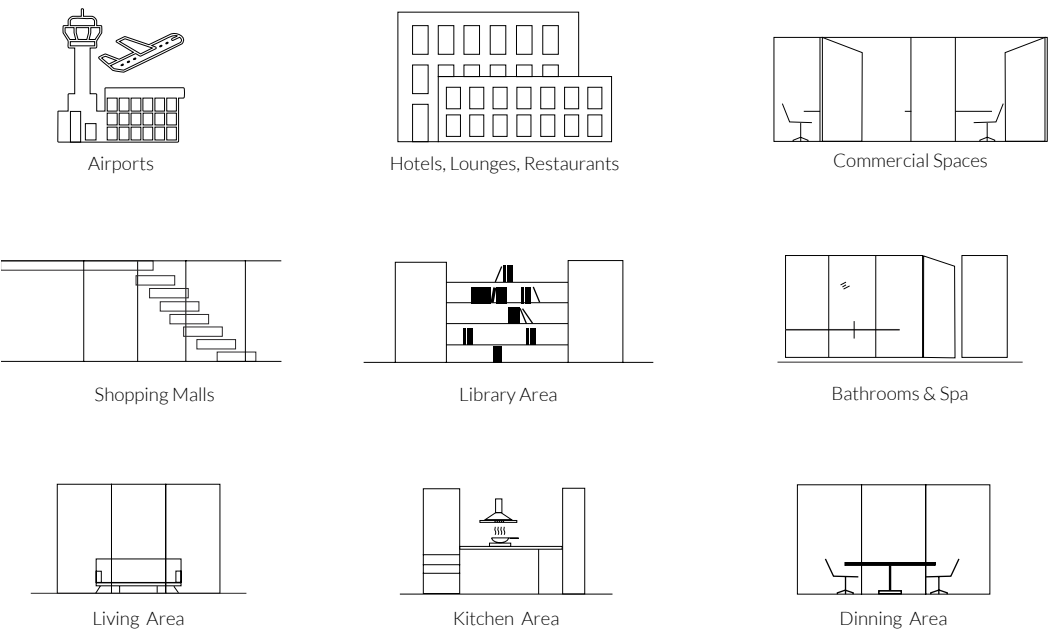

Added Utilities :

WALL & FLOORS

Cut to Size

FURNITURE

Reception Desks | Fireplaces
Tables | Planters

BATHROOMS

Washbasins | Shower Trays
Bathtubs | Counter tops

KITCHENS

Sinks | Counter tops

STAIRWAYS

Steps | Handrails

SWIMMING POOLS

Customized Pool Grids
Pool-edges Pieces

SHAPES & DECORATES


Water jet Shapes
Sandblast Decorated

FACADES & CLADDING

Cut to Size

MODULARITY


We offer tiles in various sizes, providing flexibility to suit different design needs and ensuring a perfect fit for any space.

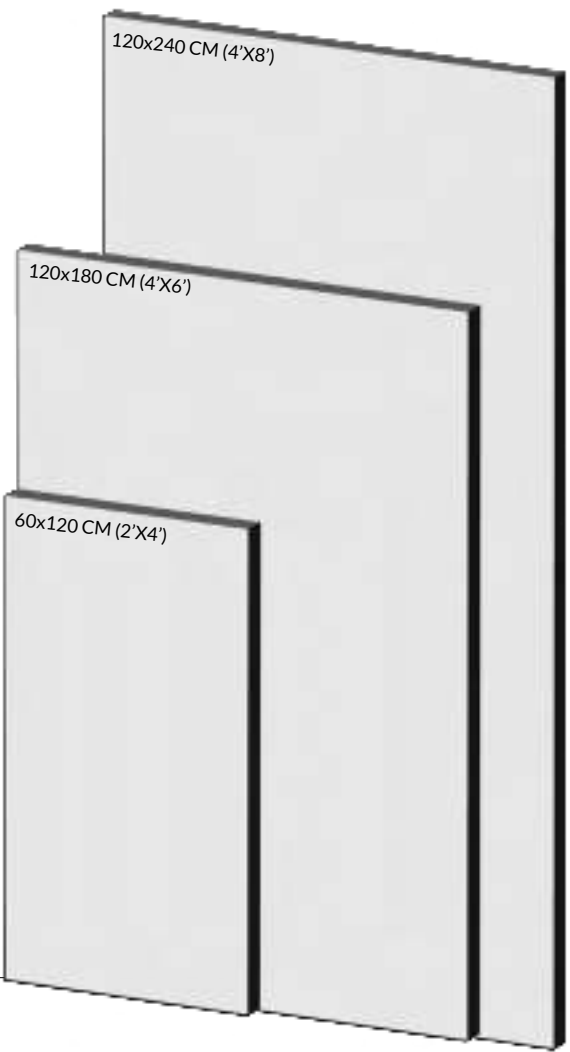

ENVIRONMENTAL
SUSTAINABILITY

From production to end result, we optimize all the processes, focusing on energy optimization, waste management, & promoting environmental health to ensure a sustainable future at every step.

ENERGY OPTIMIZATION



Efficient methane gas co generation plant



Heat recovery from furnaces & cooling water



CHP vapor recovery with 40% savings in methane gas



100% LED lighting. 50% annual power saving

WASTE MANAGEMENT



100% recycled Raw & cooked waste



90% waste sent to recovery



100% recycled industrial water & 27% reduction in water consumption in 3 years



100% recyclable packaging material


ENVIRONMENTAL HEALTH




Continuously operating purification & filtration system



RTO system to reduce harmful emissions & odors



Automated vertical warehouse. 60% reduction in CO2



0% Lead, Cadmium & other carcinogenic substances in product.

TECHNICAL
INFORMATION

DIMORE Surfaces emphasizes the importance of consulting the regulations and requirements that govern the proper process. These assessments ensure the tile meets industry standards for durability, functionality, and visual quality.

	Test Methods	Requirements	Technical Characteristics	DIMORE
Dimensional Characteristics	ISO 10545 -2 / IS13630-1	± 0.3 % /± 0.10 %	Dimensions- Length and width	± 0.10 %
		± 5.0 % /± 5.0 %	Thickness	± 5 %
		± 0.3 % /± 0.10 %	Straightness	± 0.10 %
		± 0.3 % /± 0.10 %	Rectangularity	± 0.10 %
		± 0.4 % /± 0.5 %	Surface flatness	± 0.20 %
Surface Quality	ISO 10545 -2 / IS13630-1	95% free from defects	Visible Defects	95% defects free from visible surface
Structural Characteristics	ISO 10545 -3 / IS13630-2	Avg. 0.5 -%, Ind 0.6% max. Avg. 0.08 -%, Ind 0.1% max.	Water Absorption	Avg. 0.08 %, Individual 0.1 % max
Bulk Mechanical Characteristics	ISO 10545 -4 / IS13630-6	thck ≥7.5 mm 1300	Breaking Strength	S≥1800 N/mm²
		Min 35, Ind min 32	Modulus of Rupture	R≥ 44N/mm²
	ISO 10545 -5 / IS13630-14	0.55, Min	Impact Resistance	≥ 0.60
Surface mechanical Characteristics	ISO 13630 -11	Min Class II	Surface Abrasion Resistance	Class - IV
	EN 101/IS 13630 - 13	As declared by Manufacturer	MOH'S Hardness	8
Thermal & Hygrometric Characteristics	ISO 10545 -8 / IS13630-4	6X10 ⁻⁶ Max	Coefficient of thermal linear expansion	6X10 ⁻⁶
	ISO 10545 -9/ IS13630-5	Min 10 Cycle	Thermal Shock Resistance	10 Cycle pass
	ISO 10545 -11/ IS13630-9	Req. 4 cycle at 7.5 Bar	Crazing Resistance	10 Cycle pass
	ISO 10545 -10/ IS13630-3	0.02 Max	Moisture Expansion (mm/m)	0.02 mm/m
Physical Characteristics	EN 12004	As per Mfg.	Bond strength/ adhesion for improved cementitious adhesives	≥ 1.0 N/mm² Class C2
	ISO 10545 -12/ IS13630-10	As per Mfg.	Frost Resistance	No Damage
Chemical Characteristics	ISO 10545 -13/ IS13630-8	Min. GB / CLASS AA, Min	Resistance to household cleaning products and swimming pool additives	Class AA
	ISO 10545 -13/ IS13630-8	As per Mfg.	Resistance low concentrations of acids and alkali	Class A
	ISO 10545 -13/ IS13630-8	As per Mfg.	Resistance high concentrations of acids and alkali	Class A
	ISO 10545 -14/ IS13630-8	Min. Class 3/ Class - 1, Min	Resistance to staining (Glazed)	Class 1
		As per Mfg.	Lead and Cadmium Release	≤0.1 mg/dm² pb, ≤0.01 mg/dm² Cd
Safety Characteristics	Dcof - ANSI A326.3 R value - DIN 51130/ IS 18433-2 Cof (ptv -wet) - IS 18433-1	As per Mfg.	Coefficient of Friction (COF)	Dcof- 0.32, R 10, cof - >30
	IS 13630 -2	Min 2.20	Bulk Density (g/cc)	≥2.20 g/cc

INSTALLATION & CLEANING

Proper cleaning post-grouting is crucial to remove residue from installation products (cements, resins, grouts, waxes, fats). Use appropriate cleaners for optimal results, especially for stubborn dirt and long-term maintenance.

CLEANING & MAINTENANCE

Cleaning After Installation

Removal of Residue	Highly concentrated cement remover, residue remover with buffered acid, cement film remover, stabilized and synergized acid detergent-solvent.
Cement Base Grout	
Grout Lime	

Everyday Cleaning

STAIN TYPE	NATURE OF STAIN	CLEANING AGENT
Rust	Acidic	Diluted Hydrochloric Acid (HCL) Common cleaning & descaling agent
Lime Scale		
Cement/Plaster/Lime		
Fat, Grease, Dust	Alkaline/Solvent- based	Concentrated, Alkaline detergent, Heavy duty floor cleaner
Coffee, Soft Drinks, fruit Juice		
Inks	Oxidizing/Solvent- based	Concentrated, Heavy duty Alkaline detergent
Oil	Solvent- based	Concentrated, Heavy duty Alkaline detergent
Rubber		
Wax		
Epoxy Adhesives		
Resin		
Wine	Oxidizing	Concentrated, Heavy duty Alkaline detergent
Iodine		

"More than materials, we offer a transformation through technological innovation, superior raw materials, and a design process that exceeds meticulousness.

We move beyond excess to create truly exceptional outcomes."

Design should never be Ordinary.
Step into a world where the Ordinary is left behind !
Welcome to DIMORE, where Creativity has no limits...

SURFACES AND BEYOND



ITALY SASSUOLO
Via Regina Pacis, No.32, 1st floor
Sassuolo (MO), 41049, Italy
Call : +39 05 36805993

DIMORE SURFACES PRIVATE LIMITED

11, Titanium, Corporate Road
Prahladnagar, Ahmedabad,
Gujarat - 380015

Email: info@dimoresurfaces.com
Website : www.dimoresurfaces.it

DIMORE Surfaces Private Limited reserves the right to make changes and modifications deemed necessary. Because of the printing process, the colors shown in this catalog are approximate, not exact. The information in this catalog is fully protected by copyright. Total or partial reproduction of text, illustrations, images and graphical representations is forbidden without the express permission of DIMORE Surfaces.

