Creation date:27.03.2026

Dianix® Blue S-BG

SD 1/1 0,9 %

Suitability

Depth of shade	HT		Carrier	Printing		Discharge printing			
						Ground		Illumination	
	Yarn	Piece		HTS	PS	alk.	$SnCL_2$	alk.	$SnCL_2$
pale	++	++	++	++	++	-	-	+	++
medium	++	++	+	++	++	-	-	+	++
dark	++	++	-	++	++	-	-	+	++

Depth of shade	HT (PES/CO)		Continuous	PES/WO		CA	CTA	PA
	Yarn	Piece	(PES/CO)	Yarn	Piece			
pale	++	++	++	Suitable 106 - 120°C	Suitable 106 - 120°C	++	++	++
medium	++	++	++			++	++	++
dark	++	++	++			++	++	+
Temperature			210 °C					

Dye characteristics

Level uptake	2
Barré coverage	very good
Metal sensitivity Cu/Fe	1 / 5
pH stability	3.0 - 9.0

Artificial Light	
Tungsten	TL 84
greener, duller	redder, duller

Rate of Dyeing Curve

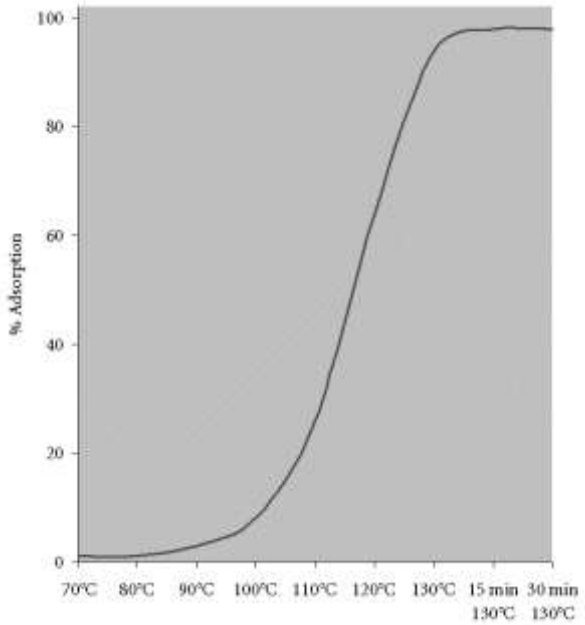

Build-up

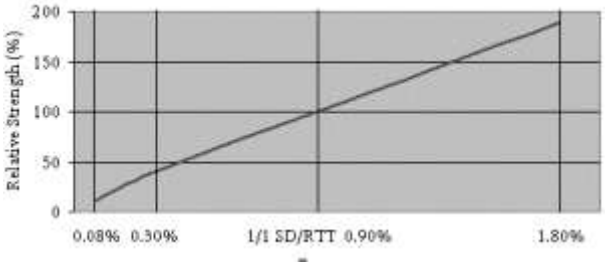

Temperature Dependency (Thermofixation)

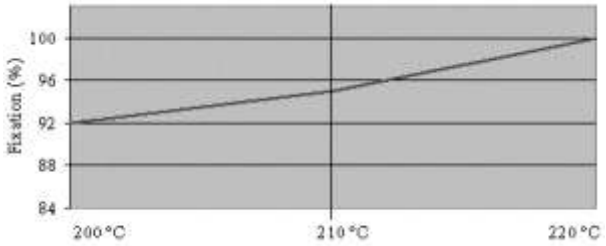

All fastness properties of the product were tested only as single product on standard materials and not in combinations/blends.

Creation date:27.03.2026

Dianix® Blue S-BG

Fastnesses properties on polyester

1/1 SD, reduction cleared postset 180°C/30 seconds		1/12 SD	1/3 SD	1/1 SD	2/1 SD
Light fastness (Xenon arc)ISO 105-B02		6	6	5-6	6-7
Light fastness(Carbon arc)AATCC 16A-1993		3	3-4	3-4	3-4
Sublimation fastness	30 s 180 °CISO 105-P01	5	5	4-5	4-5

1/1 SD, reduction cleared postset 180°C/30 seconds		F	CA	CO	PA	PES	PAN	WO
Water fastness, severeISO 105-E01		5	5	5	5	5	5	5
Home laundry / washing 50 °CISO 105-C06-B2S		5	5	5	3-4	4-5	5	5
Home laundry / washing 60 °CISO 105-C06-C2S		-	-	-	-	-	-	-
Washing 50 °C / 120 °FAATCC TM 61 - 2A		5	4-5	5	3-4	4-5	5	4-5
PerspirationISO 105-E04	alkaline	5	5	5	5	5	5	5
	acid	5	5	5	5	5	5	5
RubbingISO 105-X12	dry			4-5				
	wet			4-5				

Fastness Properties on Polyester/Cotton

PES/CO 50/50 1/1 SDpostset 180 °C/30 seconds		F	CA	CO	PA	PES	PAN	WO
Water fastness, severe ISO 105-E01	washed (80 °C)		5	5	4-5	5	5	5
	Reduction clearing		5	5	4-5	5	5	5
Home laundry / washing 50 °C ISO 105-C06-B2S	washed (80 °C)		4-5	5	3	4	5	5
	Reduction clearing		4-5	5	3	4	5	5
Home laundry / washing 60 °C ISO 105-C06-C2S	washed (80 °C)		-	-	-	-	-	-
	Reduction clearing		-	-	-	-	-	-
Washing 50 °C / 120 °F AATCC TM 61 - 2A	washed (80 °C)		4-5	5	2-3	4	5	4
	Reduction clearing		4-5	5	2-3	4	5	4
Perspiration fastness, alkaline ISO 105-E04	washed (80 °C)		5	5	4-5	5	5	5
	Reduction clearing		5	5	4-5	5	5	5
Perspiration fastness, acid ISO 105-E04	washed (80 °C)		5	5	4-5	5	5	5
	Reduction clearing		5	5	4-5	5	5	5
Rubbing, dry ISO 105-X12	washed (80 °C)			5				
	Reduction clearing			5				

Other properties

	Staining in fiber blends				Dyeing in fiber blends	
	Cotton		Wool 105 °C	Acrylic 105 °C	Triacetate 120 °C	Polyamide 120 °C
	130 °C	Thermosol				
Rinsed	2	1	1	1-2	2 G	3 D
Reduction clearing	2-3	1-2 R	1 R	1-2		

Warranty Information

This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.

All fastness properties of the product were tested only as single product on standard materials and not in combinations/blends.