**Creation date:27.03.2026**

# Dianix® Blue S-BG

SD 1/1 0,9 %

## Suitability

| Depth of shade | HT | | Carrier | Printing | | Discharge printing | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Ground | | Illumination | |
| | Yarn | Piece | | HTS | PS | alk. | $SnCL_2$ | alk. | $SnCL_2$ |
| pale | ++ | ++ | ++ | ++ | ++ | - | - | + | ++ |
| medium | ++ | ++ | + | ++ | ++ | - | - | + | ++ |
| dark | ++ | ++ | - | ++ | ++ | - | - | + | ++ |

| Depth of shade | HT (PES/CO) | | Continuous | PES/WO | | CA | CTA | PA |
|---|---|---|---|---|---|---|---|---|
| | Yarn | Piece | (PES/CO) | Yarn | Piece | | | |
| pale | ++ | ++ | ++ | Suitable 106 - 120°C | Suitable 106 - 120°C | ++ | ++ | ++ |
| medium | ++ | ++ | ++ | | | ++ | ++ | ++ |
| dark | ++ | ++ | ++ | | | ++ | ++ | + |
| Temperature | | | 210 °C | | | | | |

## Dye characteristics

| | |
|---|---|
| Level uptake | 2 |
| Barré coverage | very good |
| Metal sensitivity Cu/Fe | 1 / 5 |
| pH stability | 3.0 - 9.0 |

| Artificial Light | |
|---|---|
| Tungsten | TL 84 |
| greener, duller | redder, duller |

## Rate of Dyeing Curve

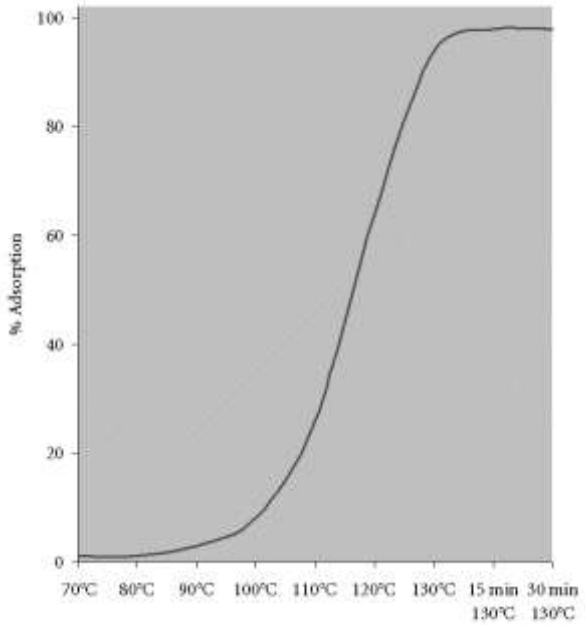


## Build-up

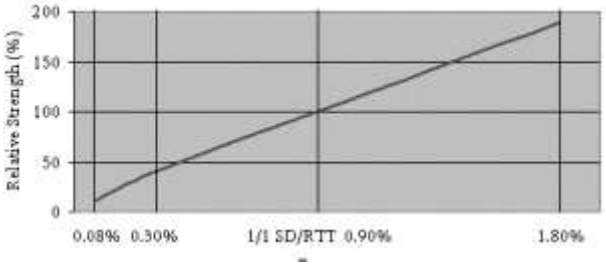


## Temperature Dependency (Thermofixation)

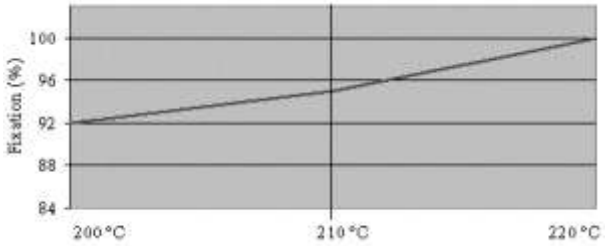


All fastness properties of the product were tested only as single product on standard materials and not in combinations/blends.

**Creation date:27.03.2026**

# Dianix® Blue S-BG

## Fastnesses properties on polyester

| 1/1 SD, reduction cleared postset 180°C/30 seconds | | 1/12 SD | 1/3 SD | 1/1 SD | 2/1 SD |
|---|---|---|---|---|---|
| Light fastness (Xenon arc)ISO 105-B02 | | 6 | 6 | 5-6 | 6-7 |
| Light fastness(Carbon arc)AATCC 16A-1993 | | 3 | 3-4 | 3-4 | 3-4 |
| Sublimation fastness | 30 s 180 °CISO 105-P01 | 5 | 5 | 4-5 | 4-5 |

| 1/1 SD, reduction cleared postset 180°C/30 seconds | | F | CA | CO | PA | PES | PAN | WO |
|---|---|---|---|---|---|---|---|---|
| Water fastness, severeISO 105-E01 | | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Home laundry / washing 50 °CISO 105-C06-B2S | | 5 | 5 | 5 | 3-4 | 4-5 | 5 | 5 |
| Home laundry / washing 60 °CISO 105-C06-C2S | | - | - | - | - | - | - | - |
| Washing 50 °C / 120 °FAATCC TM 61 - 2A | | 5 | 4-5 | 5 | 3-4 | 4-5 | 5 | 4-5 |
| PerspirationISO 105-E04 | alkaline | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | acid | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| RubbingISO 105-X12 | dry | | | 4-5 | | | | |
| | wet | | | 4-5 | | | | |

## Fastness Properties on Polyester/Cotton

| PES/CO 50/50 1/1 SDpostset 180 °C/30 seconds | | F | CA | CO | PA | PES | PAN | WO |
|---|---|---|---|---|---|---|---|---|
| Water fastness, severe ISO 105-E01 | washed (80 °C) | | 5 | 5 | 4-5 | 5 | 5 | 5 |
| | Reduction clearing | | 5 | 5 | 4-5 | 5 | 5 | 5 |
| Home laundry / washing 50 °C ISO 105-C06-B2S | washed (80 °C) | | 4-5 | 5 | 3 | 4 | 5 | 5 |
| | Reduction clearing | | 4-5 | 5 | 3 | 4 | 5 | 5 |
| Home laundry / washing 60 °C ISO 105-C06-C2S | washed (80 °C) | | - | - | - | - | - | - |
| | Reduction clearing | | - | - | - | - | - | - |
| Washing 50 °C / 120 °F AATCC TM 61 - 2A | washed (80 °C) | | 4-5 | 5 | 2-3 | 4 | 5 | 4 |
| | Reduction clearing | | 4-5 | 5 | 2-3 | 4 | 5 | 4 |
| Perspiration fastness, alkaline ISO 105-E04 | washed (80 °C) | | 5 | 5 | 4-5 | 5 | 5 | 5 |
| | Reduction clearing | | 5 | 5 | 4-5 | 5 | 5 | 5 |
| Perspiration fastness, acid ISO 105-E04 | washed (80 °C) | | 5 | 5 | 4-5 | 5 | 5 | 5 |
| | Reduction clearing | | 5 | 5 | 4-5 | 5 | 5 | 5 |
| Rubbing, dry ISO 105-X12 | washed (80 °C) | | | 5 | | | | |
| | Reduction clearing | | | 5 | | | | |

## Other properties

| | Staining in fiber blends | | | | Dyeing in fiber blends | |
|---|---|---|---|---|---|---|
| | Cotton | | Wool 105 °C | Acrylic 105 °C | Triacetate 120 °C | Polyamide 120 °C |
| | 130 °C | Thermosol | | | | |
| Rinsed | 2 | 1 | 1 | 1-2 | 2 G | 3 D |
| Reduction clearing | 2-3 | 1-2 R | 1 R | 1-2 | | |


**Warranty Information**

This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.


All fastness properties of the product were tested only as single product on standard materials and not in combinations/blends.