

1 UNIVERSITY OF CHINESE ACADEMY OF SCIENCES

2 DOCTORAL THESIS

3

4 **The study of Higgs properties in the**
5 **four-lepton final state at CMS**

6

7 *Author:*

Tahir JAVAID

Supervisor:

Prof. Guoming CHEN

Co-supervisor:

Prof. Mingshui CHEN

8 *A thesis submitted in fulfillment of the requirements*
9 *for the degree of Doctor of Science*

10 *in the*

11 Institute of High Energy Physics
12 Chinese Academy of Sciences



Contents

15	List of Figures	v
16	List of Tables	vii
17	1 The Compact Muon Solenoid (CMS) detector	1
18	1.1 The Compact Muon Solenoid (CMS) detector	1
19	1.1.1 General aspects and the geometry	2
20	The CMS magnet	3
21	1.1.2 CMS Coordinate system	4
22	1.1.3 Inner Tracking System (ITS)	5
23	The Pixel Detector	5
24	The Silicon Strip	7
25	1.1.4 Electromagnetic Calorimeter (ECAL)	8
26	1.1.5 Hadron Calorimeter (HCAL)	11
27	1.1.6 CMS Muon System	13
28	Drift Tubes (DT)	13
29	Resistive Plate Chambers (RPC)	15
30	Cathode Strip Chambers (CSC)	16
31	Improvements in CMS muon system during Run1 - Run2	
32	and during ongoing long shutdown 2	17
33	1.2 CMS Trigger System and the Data Acquisition	19
34	1.2.1 The L1 Trigger of CMS	20

List of Figures

36	1.1	The CMS detector schematic diagram	2
37	1.2	CMS magnet system.	4
38	1.3	CMS spherical coordinte system	4
39	1.4	Schematic diagram of CMS tracker system. Lines represent detector	
40		modules (before phase 1 pixel upgrades).	6
41	1.5	Schematic diagram of pixel detector's upgrade. Old pixel detector	
42		is shown by the lower half detector, and the new pixel detector is	
43		represented by the upper half.	6
44	1.6	Pixel detector's hit efficiency as function of instantaneous luminos-	
45		ity corresponding to 2016 data (left) and to 2017 data (right)	7
46	1.7	CMS ECAL pseudo-rapidity coverage.	8
47	1.8	CMS ECAL layout	9
48	1.9	CMS ECAL energy resolution curve with individual term contribu-	
49		tions.	10
50	1.10	CMS ECAL energy resolution.	10
51	1.11	CMS HCAL layout.	11
52	1.12	CMS muon system layout (as stood by Run2 operations of LHC). . .	14
53	1.13	(a) Schematic diagram of drift cell and produced electric field. (b)	
54		Cross sectional view of DT chambers in barrel shown one of the five	
55		wheels	15
56	1.14	Cross sectional view of a RPC chamber.	16
57	1.15	CSC layout (left) and induced current (right) when a charged parti-	
58		cle pass through it.	17
59	1.16	Overview of electronic boards of a CSC chamber and involved in	
60		communication of data. Readout system of ME/1/1 chambers were	
61		upgraded after Run 1, hence differs from other chambers.	18
62	1.17	Updated schematic diagram of CMS muon system with addition of	
63		GEM chambers.	19
64	1.18	The configuration of L1 trigger.	20

65	1.19 The CMS DAQ system structure.	21
----	--	----

List of Tables

Chapter 1

The Compact Muon Solenoid (CMS) detector

Since the data used for the analysis in the dissertation was collected using the CMS detector, this chapter would focus on geometry of CMS, its parts (sub-detectors) and description of how events are reconstructed with the CMS detector.

1.1 The Compact Muon Solenoid (CMS) detector

LHC has set new frontiers for researches in particle physics experiments. State of the art experimental facility has annexed with equipment based on latest technology. To assure the validity of results from the experiment, LHC has its two major and general purpose experiments for cross-validation, one of which is CMS. They have same physics goals with some different design and the detector technology. Particularly the CMS is capable to provide good resolution for muon identification and momentum over wide range of dimensions and determination of the charge on muons with ultimate precision with momentum up to 1 TeV. It gives healthy inner tracker reconstruction efficiency and resolution of charged particle momentum. It has efficient trigger system and better discrimination of τ 's and b-jets. Further, it is benefitted from good dielectron, diphoton and dijet mass and energy resolutions, and as well as missing-transverse-energy (MET) resolutions. This makes it capable to study large areas from SM Physics (including Higgs Physics) to search for extra dimensions and the dark matter covering physics in energy range from a few 100 GeV to TeV scale [Reference34].

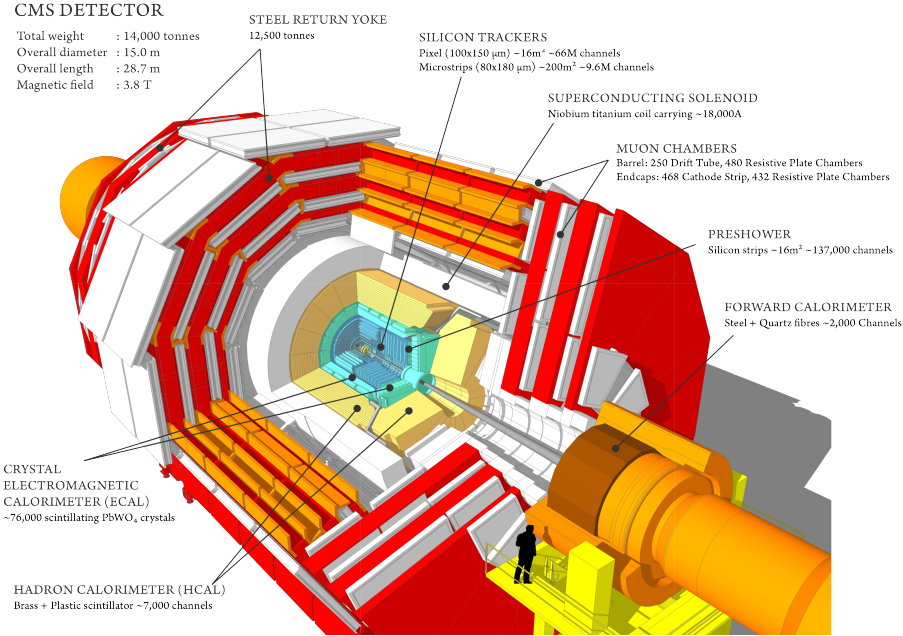


FIGURE 1.1: The CMS detector schematic diagram

1.1.1 General aspects and the geometry

Being one of the two general purpose detectors installed at LHC ring, CMS is constructed in cylindrical shape having length about 28 m and outer radius of around 7 m. Its overall height is about 15 m with overall weight of about 14,000 tonnes. Overall design of the CMS detector can be seen in the Figure 1.1. Learning from the earlier experiment at CERN, CMS engineered to be built in different slices at surface instead of doing everything underground. And fifteen separate slices were then lowered to underground to be fixed at the LHC tunnel.

Moving radially outwards from interaction point of beams, there are inner tracker system (ITS), electromagnetic calorimeter (ECAL) and hadronic calorimeter (HCAL) sub-detectors of CMS which are fitted inside the large solenoid magnet. Inner tracker of CMS has large track multiplicity as being closest to beam pipe where collisions happen. ECAL is built with crystals of lead tungstate which covers pseudorapidity up to $|\eta| < 3.0$. After ECAL, hadronic calorimeter is installed which is made of brass. Outermost layer of the CMS detector is the Muon System. Details of sub-detectors, trigger system and data acquisition systems will be described in next Sections.

The CMS magnet

Measuring the momentum of the charged particle with great precision is one of the ultimate goals of the CMS detector. In this regard, choice of magnetic field configuration is a very important feature of a particle detector like CMS. Stronger magnetic field is needed to measure high energy charged particle momentum with precision. In CMS, this is achieved by selecting the superconducting solenoid magnet.

When a charged particle moves in uniform magnetic field of a solenoid, its momentum resolution which depends upon strength of magnetic field and the radius of solenoid, can be written as:

$$\frac{dp}{p} \propto \frac{p}{Br^2} \quad (1.1)$$

Here r is the path length traversed by the charged particle inside the magnetic field (it becomes radius of the magnetic if the particle passed the full magnet). It is obvious from the relation, that for detector to obtain high momentum resolution, we need a volumetric solenoid magnet with stronger magnetic field. CMS solenoid magnet is designed to have bore of diameter 6 m and length 12.5 m producing magnetic field of 3.8 T which is 100,000 times stronger than earth magnet. It is the largest ever built magnet weighs about 12,000 tonnes. It is powerful enough in providing a strong magnetic field in its dimensions throughout the detector. It surrounds CMS ITS, ECAL and HCAL. The strong magnetic field efficiently bends the charged particles when they move through it. More the momentum of the charged particles less they bend, so high energetic charged particles require a stronger magnetic field for its momentum to be measured accurately. CMS aims to have excellent momentum resolution with such strong magnetic field specially for muons. The schematic diagram of CMS magnet is given in the Figure 1.2.

The CMS magnetic is made of coil of NbTi wire which becomes a source of uniform magnetic field when current passes through it. The NbTi becomes superconductor at -268.5°C (4 K) which allows a huge amount of current (10,000 A) to pass through it. To maintain this temperature liquid helium is used. The magnetic field direction inside (tracker) and outside the solenoid (muon system) allows to make second momentum measurement for muons [cms:MFTDR, Reference36, Reference37, Reference38].

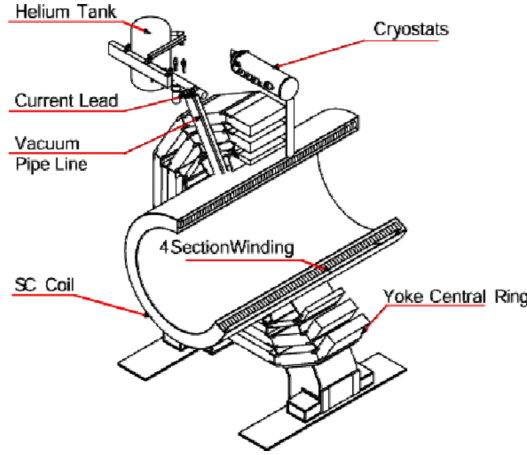


FIGURE 1.2: CMS magnet system.

1.1.2 CMS Coordinate system

Coordinate system used for CMS detector for its operations is sketched in Figures 1.3(a) ?? . The CMS detector is in cylindrical shape around beam axis as illustrated in Figure 1.1 which is represented by $Z - axis$ in Figures 1.3(a) 1.3(a). The point where two beams collides in beam pipe is called center of experiment; the y axis is directed vertically upwards and the x axis being horizontal towards the LHC ring center.

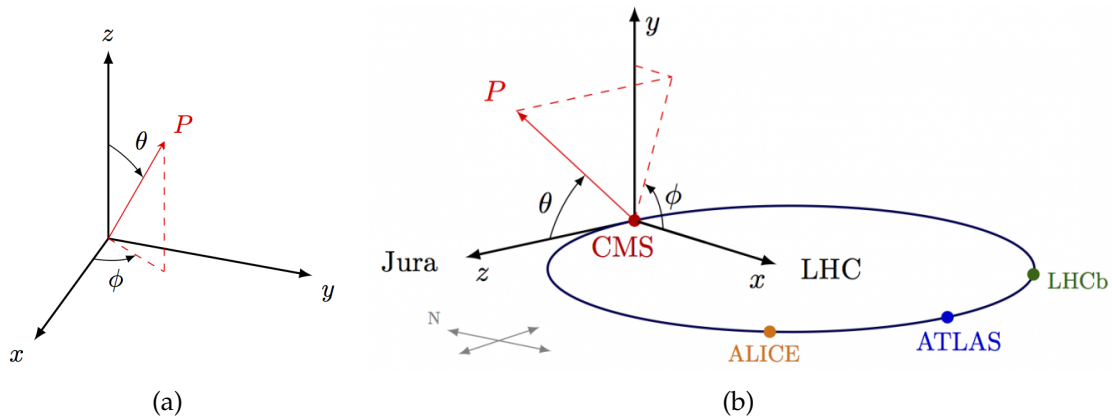


FIGURE 1.3: CMS spherical coordinte system

The r represents the radial component in transverse plane while ϕ is the the azimuthal angle measured from the x axis. θ which is measured from z axis is called polar angle. Position of particle when it passes through the CMS is described in terms of (η, ϕ) , where η being the pseudo-rapidity defined as $\eta = -\ln \tan(\theta/2)$ and

remains invariant under the longitudinal boosts in the environment of the partons which carry the fractions of the momentum from hard scattering collisions of e.g. proton-proton. Moreover, pseudorapidity also helps to differentiate the barrel regions from the endcap regions of sub detectors. In terms of pseudorapidity, the barrel region are defined by $|\eta| < 1.5$ whereas the endcap region corresponds to $1.5 < |\eta| < 3.0$.

1.1.3 Inner Tracking System (ITS)

The CMS ITS is a sub-detecting system of the CMS detector which is important from its task to give best tracks and hence the momenta (above 1 GeV) of the particles (electron, muon, hadrons-quark-structured particles and other short-lived particles) produced in the collisions that take place at CMS, LHC. It is the most inner sub-detector placed under influence of a strong and uniform magnetic field of CMS solenoid and it surrounds the region of beam pipe as shown in Figure 1.1. ITS also provides the position information of the primary and secondary vertices which is important to reject extra interactions and objects.

Being in cylindrical shape, it has a diameter of about 2.5 m and length about 5.5 m providing $|\eta|$ coverage up to 2.5. At LHC nominal luminosity of $10^{34} \text{ cm}^2 \text{ s}^{-1}$, there is an average of more than 20 proton-proton interactions (called pileup, for 2018 it was above 30) leading to average about 1000 particles emerging after every bunch crossing, 25 ns. ITS is entirely made up of (200 m^2 of) silicon which is benefitted from being super efficient in the environment of huge flux of particles coming out of the interaction point. A schematic diagram of CMS ITS is shown in the figure 1.4 (as stood before phase 1 pixel upgrade).

To limit the damage mainly by radiation ITS is kept at about -20° C . Full ITS is an assembly of a pixel detector and silicon strip tracker.

The Pixel Detector

Part of the tracker system which is nearest to the interaction point is the Pixel detector. Silicon modules of the pixel detector, are facilitated with pixel cells of size $100 \times 150 \mu\text{m}^2$ each providing the $|\eta|$ range up to 2.5. It helps to reconstruct the secondary vertex and delivers three spatial points precisely throughout its geometry [Reference34].

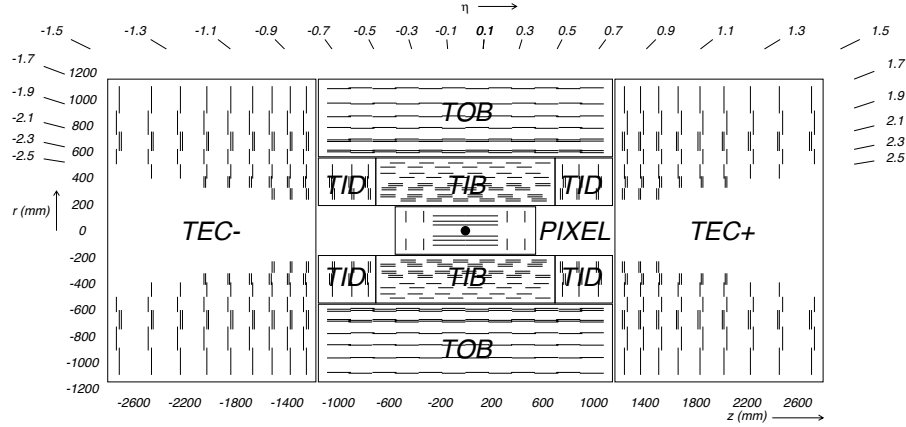


FIGURE 1.4: Schematic diagram of CMS tracker system. Lines represent detector modules (before phase 1 pixel upgrades).

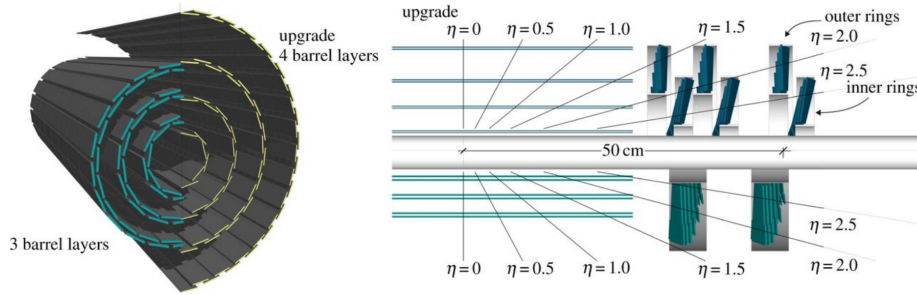


FIGURE 1.5: Schematic diagram of pixel detector's upgrade. Old pixel detector is shown by the lower half detector, and the new pixel detector is represented by the upper half.

During data taking of Run 1 operations of LHC, some dynamic inefficiencies (about 5% at an event pile-up of 40) were reported in the first layer of barrel of pixel sub-detector, due to the limited size of the readout bandwidth. Subsequently, a new pixel detector was installed in March 2017 Ref. ??, equipped with one additional barrel layer and one additional forward disk. In the new pixel detector, the innermost layer is closer to the interaction point and the outermost one is further away from it as it is shown in Fig. 1.5

It also uses new Readout Chips (ROCs) benefitted from reduced data loss at higher collision rates with respect to Phase 1 operations (at 160 Mbit/s). Bandwidth of the readout electronics was increased approximately by a factor of eight (320 Mbit/s). In addition, DC-DC power converters were installed to allow reusing the existing fibers and cables. Hence, the upgraded pixel detector has a higher rate capability and number of channels, providing increased tracking efficiency,

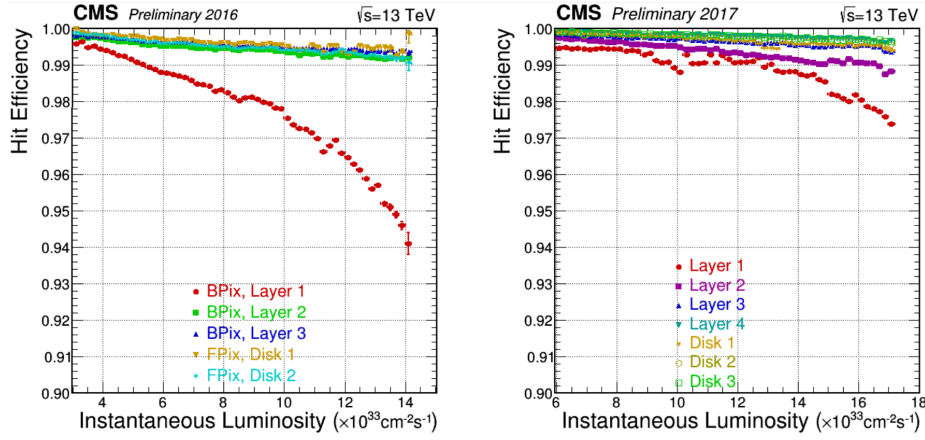


FIGURE 1.6: Pixel detector's hit efficiency as function of instantaneous luminosity corresponding to 2016 data (left) and to 2017 data (right)

reduced fake rate, and improved impact parameter resolution. In the figure 1.6, clear improvements in the dynamic efficiency of 2017 (with pixel upgrades) with respect to the 2016 (without pixel upgrades) can be seen Ref. [Sonneveld:2018ntf].

Overall, the pixel detectors is of 1 m^2 size containing 66 million pixels.

The Silicon Strip

Next layer to the pixel detector is called Silicon Strip Tracker which is installed at radial distance from 20cm to 116cm. This detector surrounds both sides of pixel with Its tacker inner barrel (TIB, 4 layers) and tracker inner disk (TID, 3 layers) surrounds the pixel detector and extend upto 20 cm-50 cm where silicon microstrips of thickness $320\mu\text{m}$ are installed. Both are surrounded the Tracker outer barrel (TOB, 6 layers) which is 220 cm long and provides z coverage up to 118 cm. In barrel and endcap regions, the pitch of strips changes from $80\mu\text{m}$ to $120\mu\text{m}$ and $100\mu\text{m}$ to $141\mu\text{m}$ respectively. Finally, the most outer part of CMS tracker system is tracker outer barrel (TOB) installed at radial distance from 55cm to 116cm containing $500\mu\text{m}$ thick 6 barrel layers with strip pitch of $183\mu\text{m}$ and $122\mu\text{m}$. Beyond $z=118 \text{ cm}$, there are tracker endcaps (TEC+, TEC-, 9 discs) which cover $124 \text{ cm} < |z| < 282 \text{ cm}$ and $22.5 \text{ cm} < |r| < 113.5 \text{ cm}$ providing coverage of $|\eta| < 2.5$.

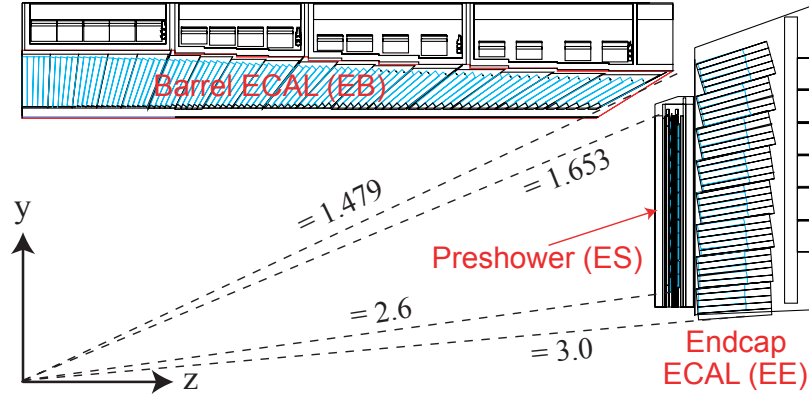


FIGURE 1.7: CMS ECAL pseudo-rapidity coverage.

1.1.4 Electromagnetic Calorimeter (ECAL)

ECAL is the cylindrical shaped homogeneous calorimeter built with 75848 crystals of lead tungstate (PbWO_4) placed inside the CMS solenoid magnet. Its barrel region (EB) contains 61200 PbWO_4 crystals and provides pseudorapidity coverage of $|\eta| < 1.479$. Endcap region of the ECAL (EE) is built with 7324 crystals on either side in endcap regions and provides pseudorapidity coverage up to $|\eta| < 3$. The region of $1.4442 < |\eta| < 1.56$ is regarded as crack region between barrel and endcaps as can be seen in Figure 1.7 taken from [Reference34]. This region is excluded for physics analysis.

When high energy particle (e.g. electron or photon) coming out of the collision point enters ECAL, it produces bunch or cascade of particles (electron through bremsstrahlung and photon through pair production) with relatively lower energies. This is called EM showering that continues until electrons dominate in ionization and photon energy becomes less than pair-production threshold.

Photodetectors Avalanche photodiodes (APDs) in barrel region and the Vacuum phototriodes (VPTs) in endcap regions are installed which efficiently work under high magnetic field environment [cms:ECALTDR]. Response of ECAL comes with emission of light that is directly proportional incident particle's energy (through ionization).

A preshower detector is installed in endcap regions to distinguish between single photon and closeby diphoton candidate e.g neutral pion decay ($\pi^0 \rightarrow \gamma\gamma$). Providing pseudorapidity coverage of $1.653 < |\eta| < 2.6$, it helps to efficiently determine the position of an electron and a photon.

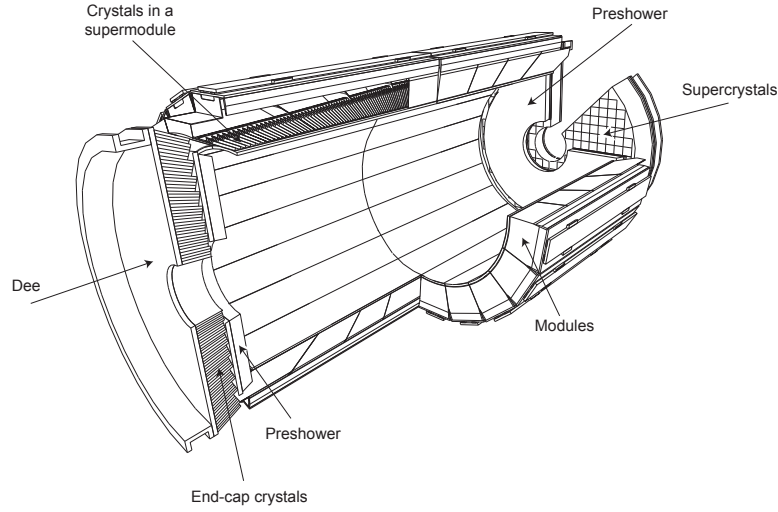


FIGURE 1.8: CMS ECAL layout

Lead tungstate is benefitted as it helps to make ECAL compact with high granularity due to the fact that it is denser (8.28 g/cm^3) with less radiation length (X_0 of 0.89 cm). Also, lead tungstate has small Molière radius, which defines the area of deposited energy, helping to minimize the effect of pileup while measuring the energy. Other important factor is that crystals of lead tungstate have decay time of scintillation about 25 ns which is also the time of LHC bunch crossing.

ECAL operating temperature is around 18°C and light emitted from the scintillation process is temperature dependent. So, in order to maintain the temperature at nominal value, cooling system is installed which is based on water circulation through Aluminium pipes and is capable enough to maintain the temperature of detector upto $18 \pm 0.05^\circ \text{C}$. Layout of the ECAL of CMS detector is shown in the Figure. 1.8.

Energy resolution of ECAL, which is the ability of detecting system to accurately measure energy of incident radiation, can be written as

$$\left(\frac{\sigma}{E}\right)^2 = \left(\frac{A}{\sqrt{E}}\right)^2 + \left(\frac{\sigma_n}{E}\right)^2 + c^2 \quad (1.2)$$

where A is stochastic term (defines the intrinsic statistical fluctuations in shower, in energy deposits of preshower, and the photo(electron)-statistics contributions), σ_n is the electronics noise term and c is constant that covers the constant factors such as non-uniformity in detector for light collection and etc. Contribution of

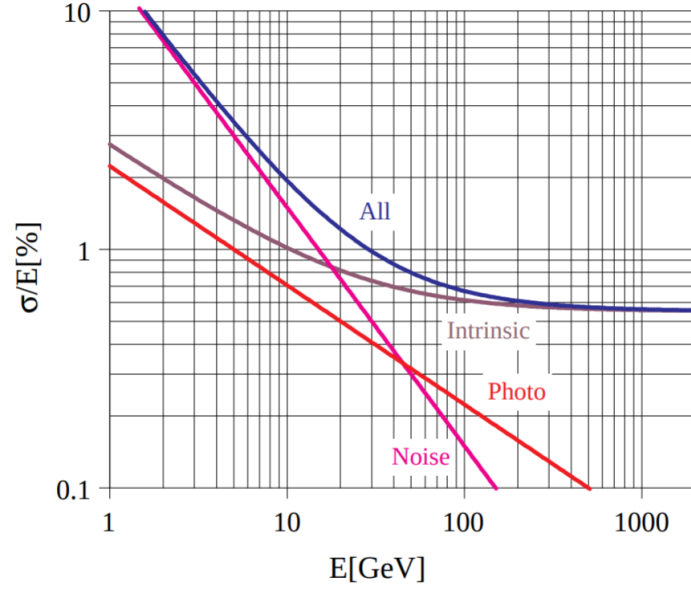


FIGURE 1.9: CMS ECAL energy resolution curve with individual term contributions.

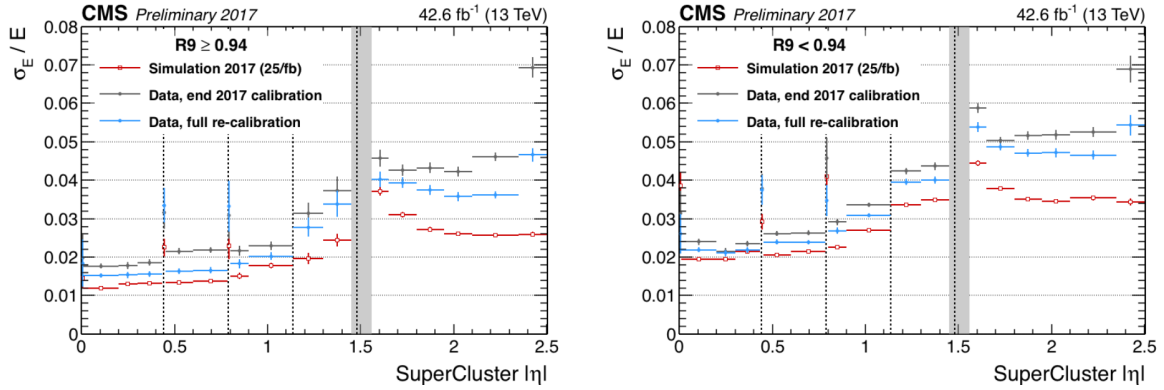


FIGURE 1.10: CMS ECAL energy resolution.

each term to the energy resolution is shown in the Figure. 1.9.

A recent study on relative energy resolution of ECAL using 2017 data and MC has been performed using Z events decaying to a pair of electrons. The resolution plots for bremsstrahlung electrons ($R_9 > 0.94$ and $R_9 < 0.94$) is separately shown for data and MC in the Figure 1.10 [Zghiche_2019]. For $H \rightarrow 4\ell$ analyses, excellent energy resolution for leptons is important for precise measurements for which ECAL of CMS plays an important role as it did for Higgs discovery.

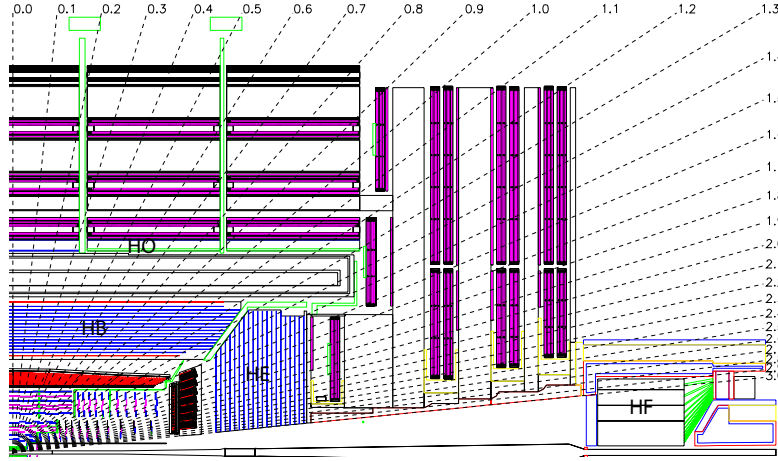


FIGURE 1.11: CMS HCAL layout.

1.1.5 Hadron Calorimeter (HCAL)

It is the part of CMS detecting system, which helps for the detection and as well as energy measurements of strongly interacting particles such as quarks (or the ones in composition of quarks), gluons hadronic jets (like neutrons, pions and etc.). Being hermetic, HCAL also helps to measure missing transverse energy (MET) which can be associated to invisible particles like neutrinos which is important studies like top quark production. HCAL assembles with CMS system between the solenoid magnet and ECAL as can be seen in the Fig. 1.1 at radial distance from 1.77 m to 2.95 m. Benefitting from pretty short interaction length, at most brass is chosen as absorber throughout the HCAL. Brass is a non-magnetic low cost material. HCAL provides pseudorapidity coverage upto $|\eta| < 3.0$ beyond which, 11.2 m away from the interaction point, forward Hadron Calorimeter (HF) is employed on both sides of the detector providing additional coverage up to $|\eta| < 5.2$. HF helps to detect particles from proton-proton collisions emerging at very small angles with respect to the beam axis.

Schematic diagram of HCAL is shown in the Figure 1.11 [Reference34].

HCAL is splitted into barrel and endcap regions, HB and HE which give pseudorapidity coverage of $|\eta| < 1.33$ and HE of $1.3 < |\eta| < 3$ respectively.

HCAL is also splitted into barrel and encap regions, HB and HE respectively. HB consists of 32 towers provides coverage of pseudorapidity of $|\eta| < 1.4$ and HE of $1.3 < |\eta| < 3$. This results in 2304 towers in a segmentation of $\Delta\eta \times \Delta\phi = 0.87 \times 0.87$.

HB serves as a single longitudinal sampling readout. HB is split into two halves (HB⁺ and HB⁻) which consist of 36 similar wedges each weighing 26 tonnes made up of brass plates. It may happen that tail of showers of hadrons which leak from rear of calorimeters may penetrate into ECAL and/or magnet. Therefore, additional calorimeter called Hadron Outer (HO) is installed outside the solenoid that used the coil of the magnet as absorber. With this effective thickness of HCAL becomes above 10 interaction lengths. HO has scintillator of 10 mm thickness and helps to improve resolution of HCAL for MET.

Pseudorapidity coverage of $3 < |\eta| < 3$ is provided by sub part of HCAL which is called Hadron Forward (HF). It suffers huge flux of the particles due to which sampling material is required to be hard against the radiations. For this purpose, steel/quartz fibre was used. HF is located 11.2 away from interaction point with 1.65 m absorber depth. With the incident particle flux, Cerenkov radiations are emitted through quartz fibers which is then channeled to photomultipliers (PMs).

HCAL is constructed with alternate layers of plastic and brass (the absorber and scintillator respectively) which helps to measure the arrival time, position and energy of a particle. Plates of brass are 79 mm thick each with 99 mm gaps for the scintillators installation. When a particle passes through scintillator, optical fibers collect the emitted lights and pass it to readout box. Total energy is calculated by summation of the light over many layers in depths called tower. The scintillator in HCAL are arranged in the form of 70,000 tiny tiles.

The energy resolution of the HCAL (i.e. HB, HO and HE) is given as

$$\left(\frac{\sigma}{E}\right)^2 = \left(\frac{90\%}{\sqrt{E}}\right)^2 + (a)^2 \quad (1.3)$$

and for that of HF it is given as

$$\left(\frac{\sigma}{E}\right)^2 = \left(\frac{170\%}{\sqrt{E}}\right)^2 + (b)^2. \quad (1.4)$$

Where a and b are constants having values 0.045 and 0.09 respectively.

There were subsequent upgrades in HCAL as in 2017, PMTs were replaced with new multi-anode PMTs and additionally electronics replaced for better differentiation of real hit from the muons which hit the PMT window. HE of HCAL was upgraded and photo detectors were replaced with latest silicon photo multipliers (SiPMs) for noise elimination and better photo detection efficiency [[pixel_hcal_upgrade](#)].

1.1.6 CMS Muon System

Identification of muons originating from the collision point is a great challenge. Having long lifetime (i.e. 2.19×10^{-6} , which is even higher in relativistic regime), they tend to cross the whole detector without decaying. Also, having higher mass (about 200 times the mass of electrons) it tends to lose very little energy via bremsstrahlung. So, they leave track however they deposit very little amount of energy in the calorimeters. Hence a dedicated muon system was proposed and installed as outermost sub-detector of CMS [cms:muonsystem_TDR]. The schematic diagram of CMS muon system (as stood by Run 2 operation of LHC) is shown in the Figure 1.12. It is benefitted from three different strategies for detection and measurements on muons.

- Drift Tubes (DT), only in barrel region
- Resistive plate chamber (RPC), in barrel and endcap regions both
- Cathode Strip Chamber (CSC), only in endcap region

The detection of the muons is very important for many physics processes particularly for the SM Higgs when it decays to ZZ/ZZ^* . Best mass resolution is obtained when each of Z decays to a pair of opposite sign muons which interact weakly with the detector leaving their traces both in muon system and as well other parts of the CMS detector. Due to this reason Higgs decaying to ZZ/ZZ^* is regarded as golden channel for Higgs properties measurements. Some theories beyond SM also require muons to be reconstructed and identified with ultimate precision which is obtained with the CMS muon system.

Muon system of CMS, benefitted from mainly gas detection technology, is designed in cylindrical shape that gives pseudorapidity coverage upto $|\eta| < 2.4$. RPC covers both barrel and endcaps, DT covers the barrel and CSC covers the endcap only. Overall goals of CMS muon system include muon identification, standalone and global muon resolution, charge assignment, triggering and capable of withstanding in high radiation and background environment.

Drift Tubes (DT)

Drift chambers play role of tracking detector in barrel region motivated to work under low event rate and relatively less strength of magnetic field.

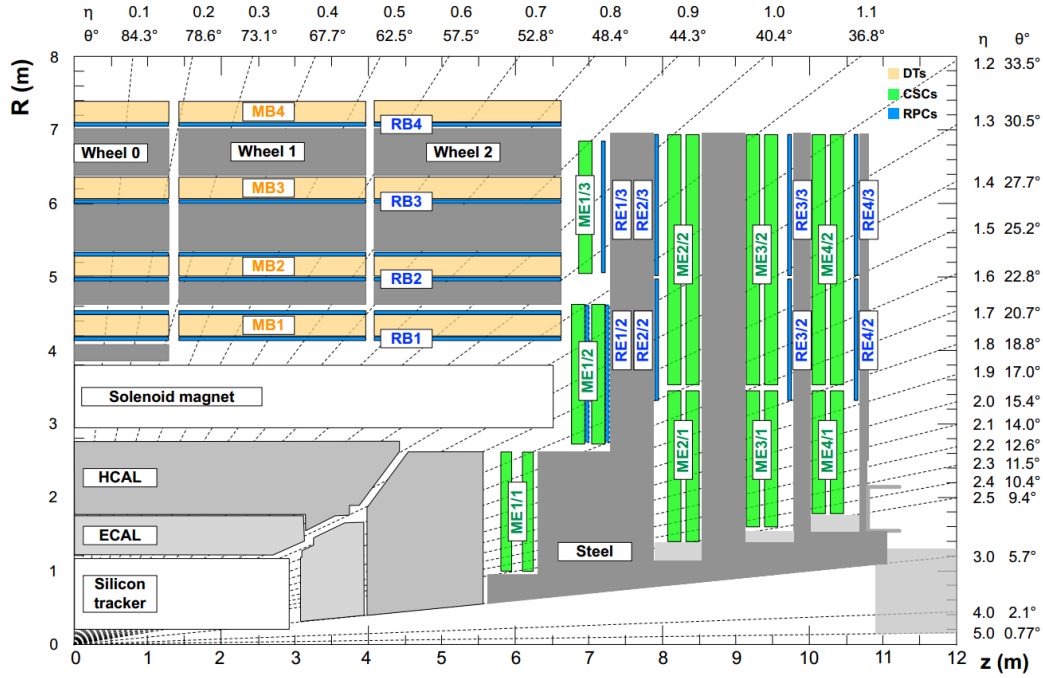


FIGURE 1.12: CMS muon system layout (as stood by Run2 operations of LHC).

The DTs make cover the barrel part of muon system alongwith the RPCs, as shown in the Figure. 1.12, providing pseudorapidity coverage of $|\eta| < 1.2$. DT system is annexed to the muon system in 4 stations, MB1, MB2, MB3 and MB4, in radially outward direction at 4.0, 4.9, 5.9 and 7.0 m respectively from IP. 250 DT chambers (composed of 12 Aluminium layers each) are fixed on 5 wheels along z-axis. 12 planes in a DT chamber (of average size 2m $\times$ 2.5m), except the ones from MB4, are build with 3 independent units which are called super-layer (SL). A set of two SLs measures coordinates in the bending plane (ϕ), the third SL helps to provide track coordinate along the beam (z). SL is further composed of DTs in 4 layers [Ref->, cms_muon_tdr]. Each DT cell has an anode wire made of steel (of radius 25 m) together with walls of the cell as cathodes which produce the (drift) electric field. A DT cell is filled with mixture of CO₂ (15%) Ar (85%) gases which are benifitted from their low cost and provision of better drift velocity of saturation and the quenching under the influence of high operating voltage of 1.8kV. A schematic diagram of a drift cell and one of wheel bearing DT chambers is shown in the Figure . 1.13 and in Ref. [comm, article_dt] . As a charged muon moves throught a DT cell, it causes ionization in gas. The librated electrons then move to-wards anode under the influence of the electric field. Drift time of these electrons

353

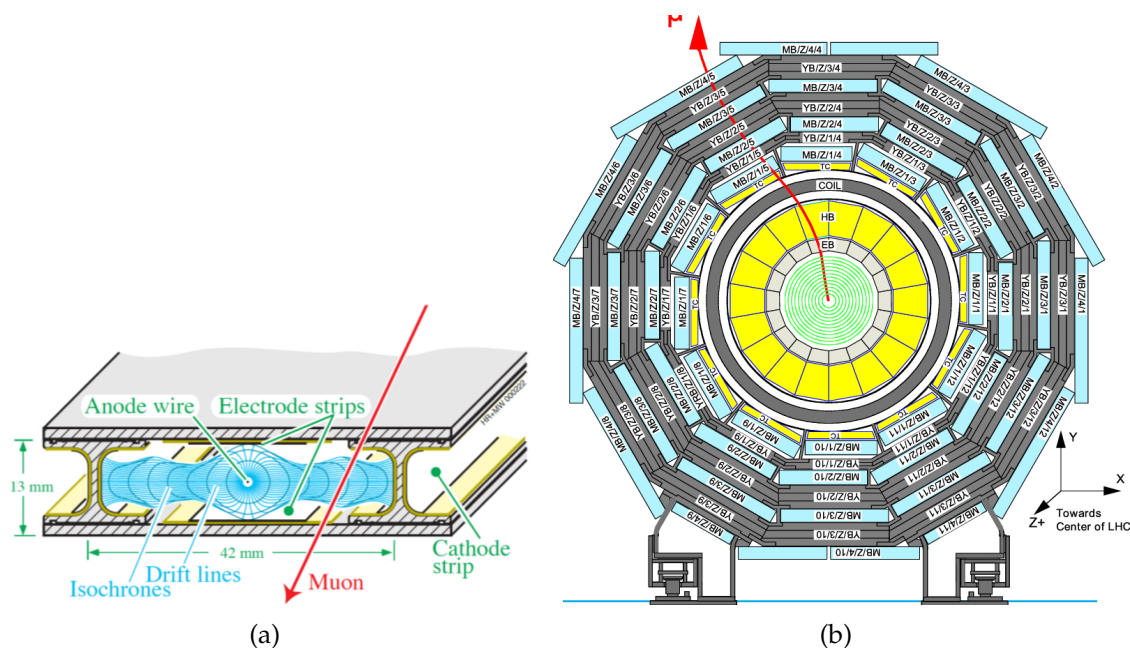


FIGURE 1.13: (a) Schematic diagram of drift cell and produced electric field. (b) Cross sectional view of DT chambers in barrel shown one of the five wheels

354

356

357

362

368

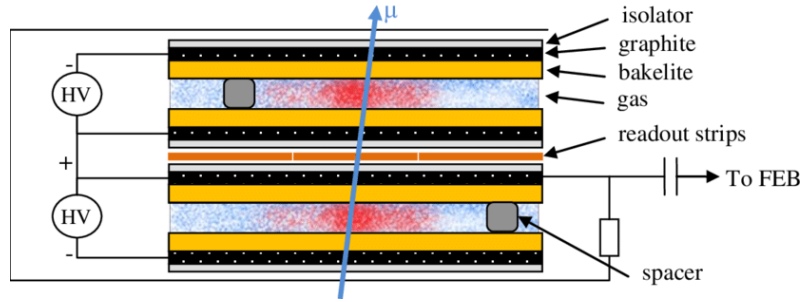


FIGURE 1.14: Cross sectional view of a RPC chamber.

Cathode Strip Chambers (CSC)

The cathode strip chambers (CSC) are the sub-detecting part of the CMS muon system, as shown in Figure ??, covering the high pseudorapidity range upto $|0.9| < |\eta| < 2.4$ and capable to provide the track and triggering of muon in this region alongwith the RPCs. It can efficiently operate at high event rate and helps to assign the bunch crossing quite efficiently. A total 540 CSCs are installed in 4 CSC stations (ME1, ME2, ME3 and ME4) and each station is further distributed in 2-3 rings with 18-36 CSCs fixed on each ring.

Each CSC is assembly of 6 independent layers, making 6 gaps of gas (Ar 50%, 40% CO_2 , 10% CF_4) with each layer have radial cathode strips and transverse anode wires. Muon passing through a CSC chambers ionizes the gas molecules thus producing the electron avalanche towards the anode wires made of copper. Produced gaseous ions which move towards the strips for the detection of image charge. These signals are collected by readout sytem, amplified and then passed to the electronic boards on chambers. In each chamber, muon hit information can be measured along the track of muon in the 6 layers. To generat a triggere primitive, hits in 4 layers out of 6 is required. Fitting the position of successive hits in the chambers gives the precision in muon momentum measurement. A layout of CSC and signal generation process is shown in the Figure. 1.15.

In a chamber layer, Cathode Front-End Boards (CFEBs) ¹ receive and then process the signal from strips. However, from anode wires, signal is read by Anode Front-End Boards (AFEBS) and processby Anode Local Charged Track (ALCT)

¹Electronics or readout system of ME/1/1 chambers were upgraded during long shutdown 1 (LS1), hence differs from other chambers.

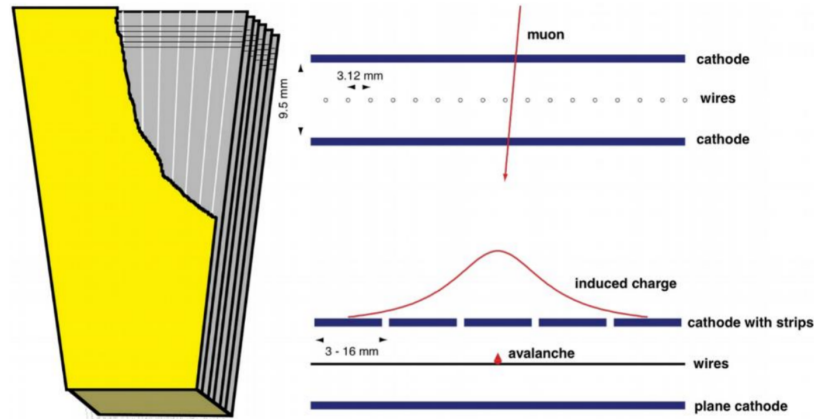


FIGURE 1.15: CSC layout (left) and induced current (right) when a charged particle pass through it.

board. These boards then communicate with the Trigger Mother Board (TMB) located in the vicinity of the endcap disks. Data is then transmitted to Data Mother Board (DMB) which sends it out Front End Driver (FET) crates whose front end electronics has interface with CMS data acquisition system. Overview of the chamber electronics and communication mechanism is elaborated in Figure. 1.16.

Improvements in CMS muon system during Run1 - Run2 and during ongoing long shutdown 2

From Run1 to Run2 operations of LHC, increasing luminosity was challenging for muon system of CMS. In order to cope with high event rate environment and utilize the gain in the luminosity, muon system of CMS underwent some upgrades or modifications [Sirunyan:2018fpa]. To minimize the misidentification rates, and improve efficiency and redundancy, RPC and CSC were extended to install RE4 and ME4 as fourth stations in the mainstream. Readout electronics and trigger system were also enhanced. To increase the bandwidth, optical fibre links in DT and CSC were added. During Run1, strips in ME1/1a ring were ganged together into a group of 3. Subsequently, new electronics, Digital Cathode Front End Boards (DCFEBs), were installed in ME1/1 chambers of CSC to provide readout to every strip separately allowing ME1/1 to effectively perform in high luminosity environment.

During ongoing long shutdown 2 (LS2), there several upgrades are in process for

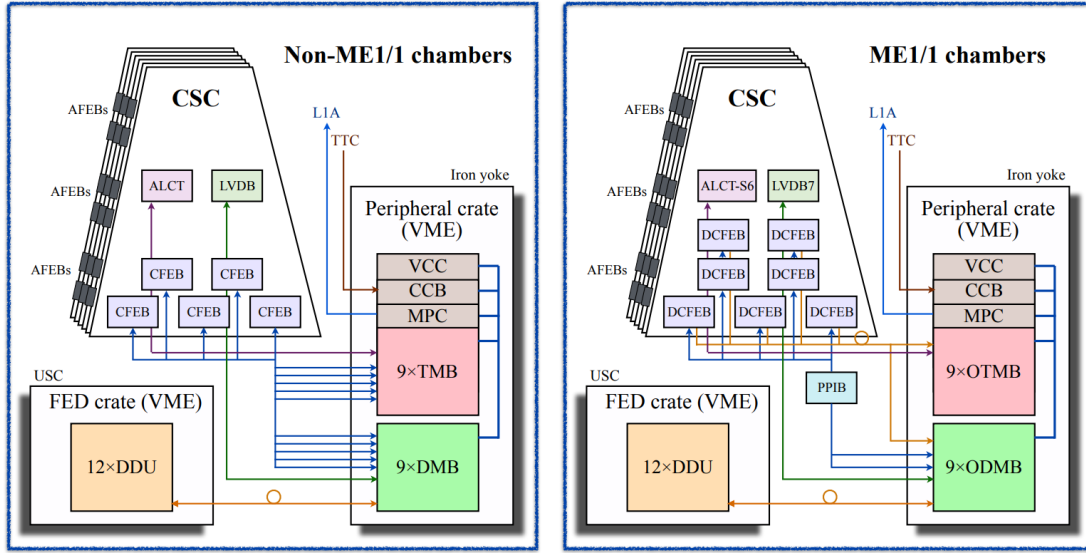


FIGURE 1.16: Overview of electronic boards of a CSC chamber and involved in communication of data. Readout system of ME1/1 chambers were upgraded after Run 1, hence differs from other chambers.

upcoming physics programs under high luminosity LHC. CSC will undergo upgrade of readout system of ME1/1, ME2/1, ME3/1, and ME4/1. Total 180 chambers will be refurbished to replace CFEBs with upgraded DCFEBs and ALCT mezzanine boards. Also for ME2/1, ME3/1 and ME4/1, LVDBs will also be upgraded.

Other main improvement for the muon system for future programs is installation of Gas Electron Multiplier (GEM) chambers in forward regions. Due to upcoming higher collision rate during Run 3 and so on, muon system needs to improve its capabilities for tracking and the triggering to efficiently work extreme environment which can be achieved with GEM chambers. In this program, first two muon stations will be supported with GE1/1 and GE2/1 (covering $1.5 < |\eta| < 2.4$) which have layers for high precision measurement. Additionally, ME0 station will be installed to extend coverage of muon system upto $|\eta| < 3$. GE1/1 among these, will be installed during LS2 and would take part in Run 3 operations; however, GE1/2 and ME0 would be installed after Run 3 operations during long shutdown 3 (LS3) after 2022 when RPC will also be upgraded as "Improved RPC (iRPC)" with new geometry, materials and frontend electronics. Updated schematic diagram of CMS muon system with addition of GEM chambers can be seen in the Figure. ?? (also in Ref. [Radogna:2016esa, Costantini:2711362]) where the actual position of

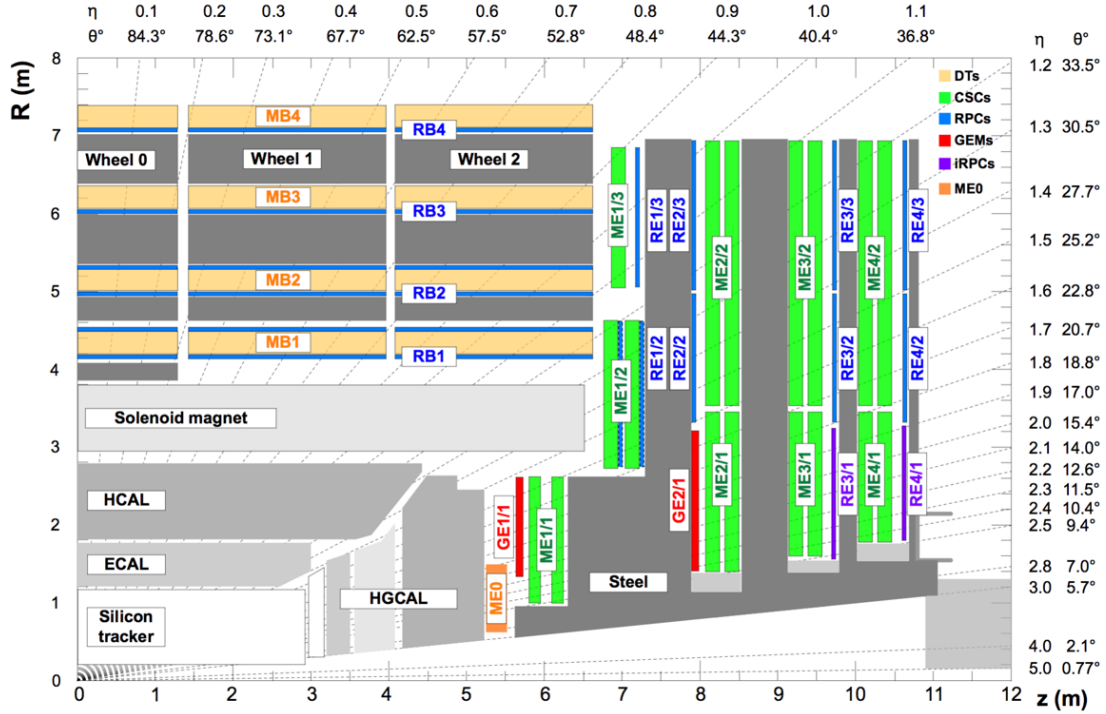


FIGURE 1.17: Updated schematic diagram of CMS muon system with addition of GEM chambers.

these chambers in muon system can be understood.

1.2 CMS Trigger System and the Data Acquisition

CMS is big and general purpose experiment purposed to explore data that LHC has produced during the proton-proton collisions. LHC produces around 40 million collisions in a second (40 MHz); however, not all the collisions are interesting for physics purposes. Further, for the data acquisition (DAQ) system, it is not effective to read every event produce at high rate. Also, storing the uninteresting events produced in LHC collisions will require a lot of storage. Hence, there is a dire need to reduce the rate of produced events during LHC collisions which is done by the trigger system which select only those events which are crucial for physics purposes. Trigger system of CMS is a sophisticated two-level system; Level 1 (L1) trigger and high level trigger (HLT).

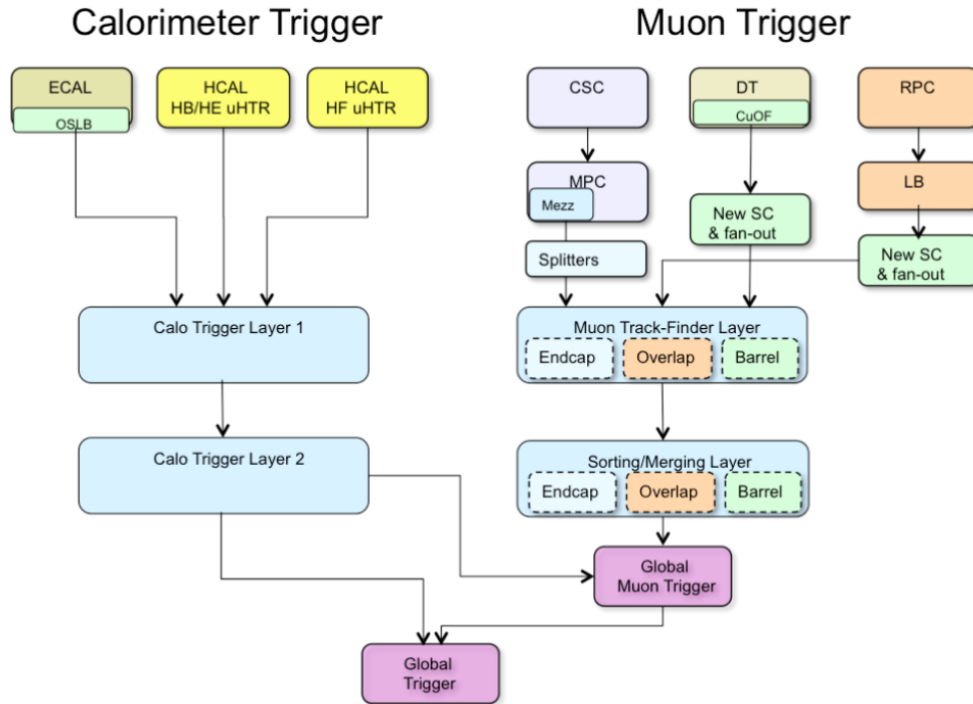


FIGURE 1.18: The configuration of L1 trigger.

1.2.1 The L1 Trigger of CMS

The L1 trigger uses CMS hardware and taking informations from the calorimeters and the CMS muon system to make decisions (in 4 s) in several steps to accept or reject an event. L1 trigger reduces event rate from 40 MHz to 100 kHz. A sketch of L1 trigger is shown in the Figure. 1.18.

L1 trigger is build with programmable electronics, that exploits coarse information of energy (ECAL and HCAL) and momentum (DT, RPC and CSC) of electrons, muons, jets, photon and MET. L1 trigger can be classified into calorimeter and muon triggers. Calorimeter has ECAL and HCAL as independent regional triggers that provide information to the global Calorimeter Trigger (GCT). Likewise, muon trigger has local trigger corresponding to CSC, DT and RPC each which then combine to make global muon trigger (GMT). GCT and GMT then feed to Global Trigger (GT) to make final decision about the event whether to accept or reject.

In order to cope with higher event rate for Run 2 operations, a new trigger

457 architecture, the Time Multiplexed Trigger (TMT) was planted. TMT uses sophis-
458 ticated algorithms (i.e. FPGAs) in μTCA to exploit full granularity of the calorime-
459 ters and benefitted from technological improvements in hardware.

Bibliography

- [1] F. Englert and R. Brout. “Broken Symmetry and the Mass of Gauge Vector Mesons”. In: *Phys.Lett.* 13.9 (1964), pp. 321–323.
- [2] T. W. B. Kibble. “Symmetry Breaking in Non-Abelian Gauge Theories”. In: *Phys. Rev. Lett.* 155.5 (1966), pp. 1554–1561.
- [3] C. R. Hagen G. S. Guralnik and T. W. B. Kibble. “Global Conservation Laws and Massless Particles”. In: *Phys. Rev. Lett.* 13.20 (1964), pp. 585–587.
- [4] P. W. Higgs. “Broken symmetries, massless particles and gauge fields”. In: *Phys. Rev. Lett.* 12.2 (1964), pp. 132–133.
- [5] P. W. Higgs. “Broken Symmetries and the Masses of Gauge Bosons”. In: *Phys. Rev. Lett.* 13.16 (1964), pp. 508–509.
- [6] P. W. Higgs. “Spontaneous Symmetry Breakdown without Massless Bosons”. In: *Phys. Rev. Lett.* 145.4 (1965), pp. 1156–1163.
- [7] ATLAS Collaboration. “Observation of a new particle in the search for the Standard Model Higgs boson with the ATLAS detector at the LHC”. In: *Physics Letters B* 716 (2012), pp. 1–29.
- [8] CMS Collaboration. “Observation of a new boson at a mass of 125 GeV with the CMS experiment at the LHC”. In: *Physics Letters B* 716 (2012), pp. 30–61.
- [9] ATLAS Collaboration. “Evidence for the spin-0 nature of the Higgs boson using ATLAS data”. In: *Phys. Lett. B* 726 (2013), pp. 120–144.
- [10] G. Aad et al. “Measurements of fiducial and differential cross sections for Higgs boson production in the diphoton decay channel at $\sqrt{s} = 8$ TeV with ATLAS”. In: *JHEP* 2014.9 (2014), pp. 1–61.
- [11] G. Aad et al. “Measurement of the Higgs boson production cross section at 7, 8 and 13 TeV center-of-mass energies in the channel $H \rightarrow \gamma\gamma$ with the ATLAS detector”. In: *JHEP* 2014.9 (2014), pp. 1–61.

- 486 [12] G. Aad et al. “Fiducial and differential cross sections of Higgs boson produc-
487 tion measured in the four-lepton decay channel in pp collisions at $\sqrt{s} = 8$
488 TeV with the ATLAS detector”. In: *Physics Letters B* 738 (2014), pp. 234–253.
- 489 [13] ATLAS collaboration. “Measurements of the Higgs boson production cross
490 section at 7, 8 and 13 TeV centre-of-mass energies and search for new physics
491 at 13 TeV in the $H \rightarrow ZZ^* \rightarrow \ell^+ \ell^- \ell'^+ \ell'^-$ final state with the ATLAS detector”.
492 In: *ATLAS-CONF-2015-059* (2015).
- 493 [14] G. Aad et al. “Measurements of the Total and Differential Higgs Boson Pro-
494 duction Cross Sections Combining the $H \rightarrow \gamma\gamma$ and $H \rightarrow ZZ^* \rightarrow 4\ell$ Decay
495 Channels at $\sqrt{s} = 8$ TeV with the ATLAS Detector”. In: *Phys. Rev. Lett.* 115
496 (2014), p. 091801.
- 497 [15] ATLAS collaboration. “Measurements of the total cross sections for Higgs
498 boson production combining the $H \rightarrow \gamma\gamma$ and $H \rightarrow ZZ^* \rightarrow 4\ell$ decay chan-
499 nels at 7, 8 and 13 TeV center-of-mass energies with the ATLAS detector”. In:
500 *ATLAS Note ATLAS-CONF-2015-069* (2015), pp. 1–61.
- 501 [16] V. Khachatryan et al. “Measurement of differential cross sections for Higgs
502 boson production in the diphoton decay channel in pp collisions at $\sqrt{s} = 8$
503 TeV”. In: *Eur. Phys. J. C* 76 (2016), pp. 1–31.