

(.125)⊸⊳

<-.512-**⊳**

- 1. BREAK ALL EDGES AND CORNERS R.005-.015 OR x 45*
- 2. W INDICATES KEY DIMENSION TO BE CHECKED AT INCOMING Q.C.
- 3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE TO BE PROVIDED.

Ø .88 TO DEPTH SHOWN SEE SECTION A-A


▼ Ø .515 TO DEPTH SHOWN

SEE SECTION A-A


 ∇_{00E} .

.642

₩ Ø .328 TO DEPTH SHOWN

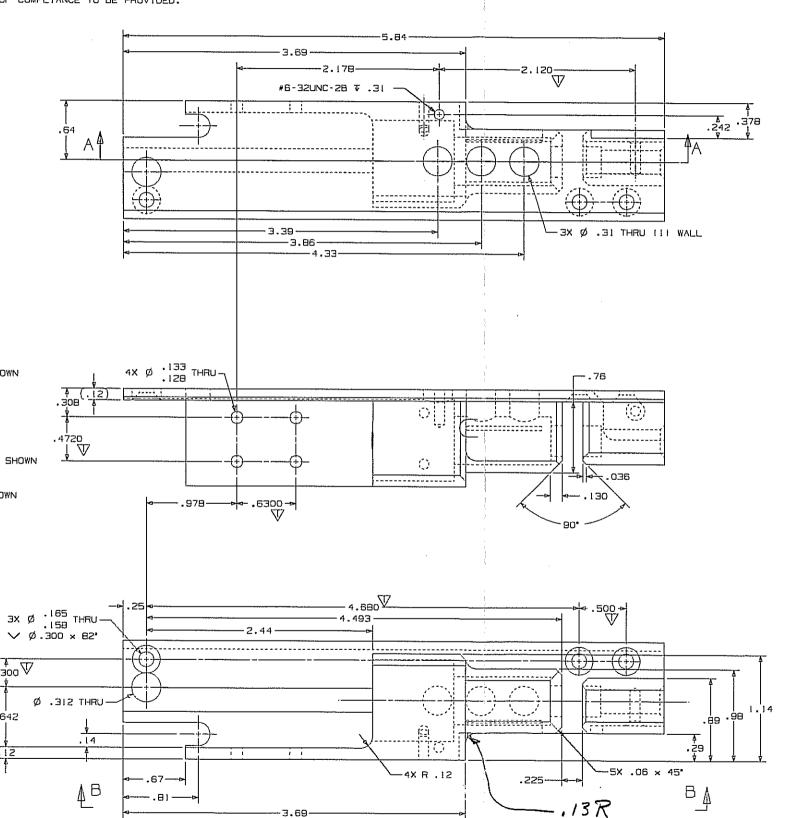

_				,	
	₽ĖV	REVISION DESCRIPTION	BY	DATE	ECG 4
	Α	INITIAL RELEASE, REPLACES 777096-226	£H	2/1/00	BCT 007054
	В	2X ¥6.3. SE-0¢ XX WAS THRU, R.O9 MAX WAS CO. R.O9, THEW	СН	04/ _{19/00}	BCT007500
:	Ü	CHANGE 0.150 C-BORE TO 0.200 C-SINK PAGE 2 FOR CLREARNCE OF SCREW ON ASSY CHANGE R 0.09 TO R 0.095 MAX	LNAG	08 08 08 08 08 08 08 08 08 08 08 08 08 0	BCT017409
	D	REVISED NOTE 3	EK	6/08/11	801031038





6-10-11 408


AND SHALL MAN	o Presidential	AT THE PROPERTY OF CONTINUESCE INC. PIED, OF LOCK FOR MANAPACTURE OF A PERSONNEL OF CONTINUESCE INC.	IDDIT Cultiry Avenue Linkwood, Colorado BDZ [5-4440
PER MAIL	MO STANDOCKIT TIA, SM- 1052 SPECIFICE AND	DINEMBER AND IN INCHES CHEESE CONTINUES SPECIFIED	CaridianBCT
.#: 0.0 .xx: 0.01 .xx: 0.05	#6.05 ± 2° 557. FINISH	MATERIAL GOS I - TS ALUM I NUM	SOLENOID HOUSING, DOOR LOCK
2:1	125 RMS	H. NGUYEN DATE H. NGUYEN DATE GATE K. KLIMEK 18/90	


UG DWG.


HEV	REVISION DESCRIPTION		DATE	€CO •
	SEE SHT. #1 FOR REV HISTORY			










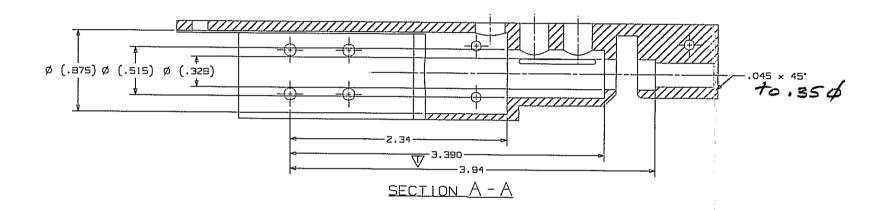

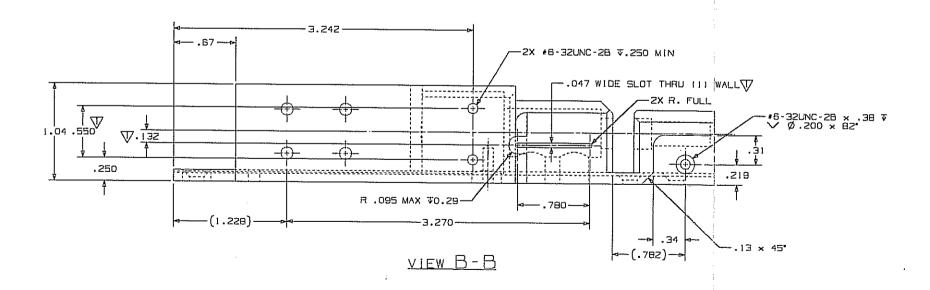

6-10-11 408

THESE DIVISIONS A MED SHALL HES SALE OF SHEAR	d PTCIFICATION A	THE PERSONNEL OF COMMISSION OF	
DIMENUTURAL S	AG STANDED TO THE THE PROPERTY OF THE PROPERTY	DINCHING ARE IN INCHES DEL	
.x: 0.1 .xx: 0.01 .xx: 0.005	#0.E5 ± [* 5#*, FINISH	MTERIAL SEE SHT. #[SOLENOID HOUSING, DOOR LOCK
D 2:1	CD Print Hear	H. NGUYEN PARI H. NGUYEN PARI PRARM DATI K. KLIMEK 46	SO PART HE. INC. SHIT OF

UG DWG.