



NOTES:


- 1. BREAK ALL EDGES AND CORNERS
R.005-015 OR $\times 45^\circ$
- 2. ▽ INDICATES KEY DIMENSION TO BE
CHECKED AT INCOMING Q.C.
- 3. APPLY CHROMATE CONVERSION COATING PER
MIL-DTL-5541F, TYPE II (ROHS COMPLIANT,
NON-HEXAVALENT), CLASS 3. CERTIFICATE OF
COMPLIANCE TO BE PROVIDED.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	KMK	5/2/97	BCT 002140
B	REVISED NOTE 3	EK	6/08/11	BCT031039

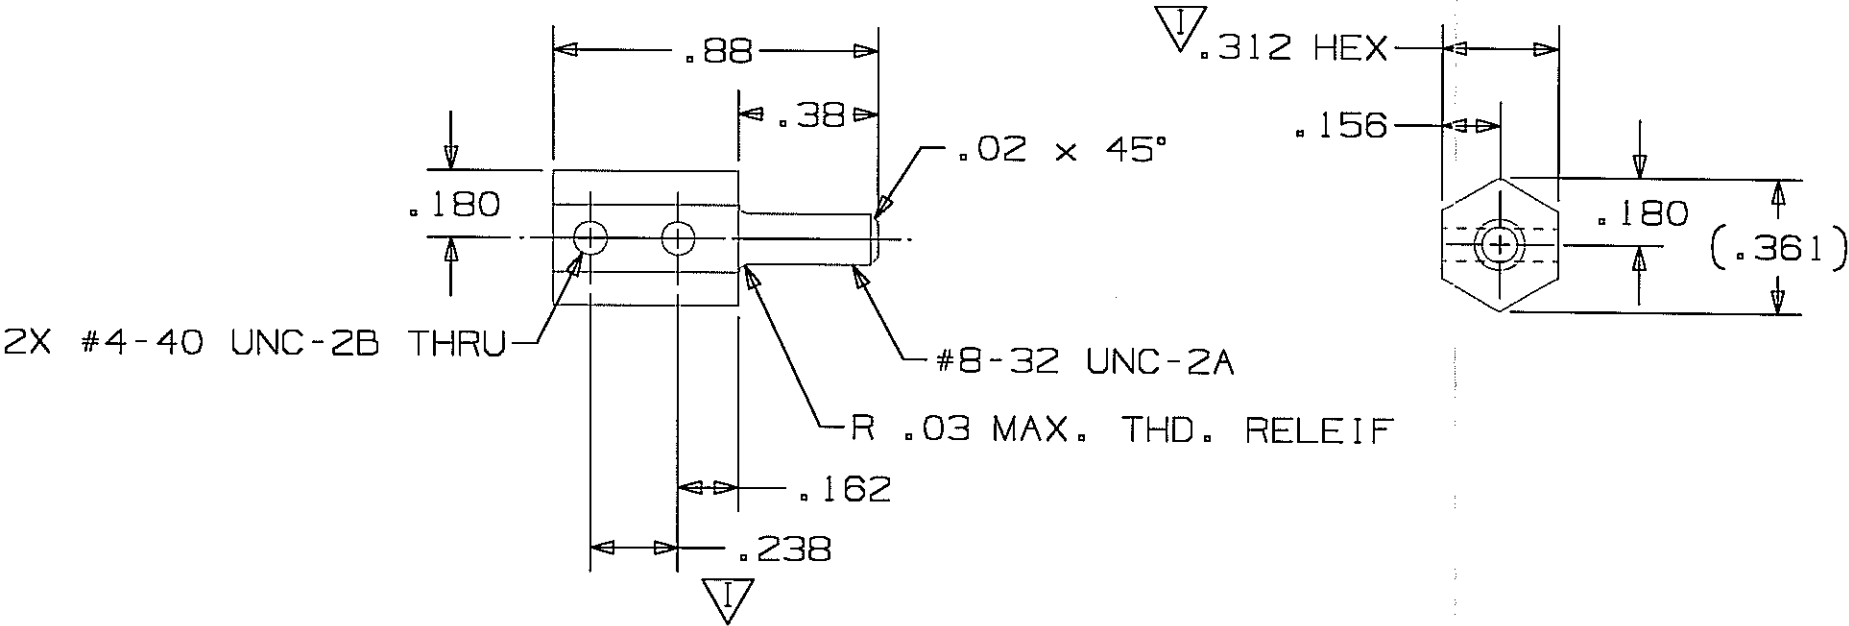

7-18-11 408

UG DWG.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT INC.				 10811 Collins Avenue Lakewood, Colorado 80215-4440 USA	
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE HEX EXTENSION, STEM	
.X± 0.1	ANGLES ± 1°	MATERIAL 2024-T4 ALUMINUM HEX STOCK		PART NO. 777096-292	
.XX± 0.01	SURF. FINISH 125 RMS	ORIGINATOR K. KLIMEK		REV	SHT / OF
.XXX± 0.005		DATE 3/24/97		B	1 / 1
.XXXX± 0.0020	DO NOT SCALE DWG	DRAWN K. KLIMEK		DATE 3/24/97	
SIZE B	SCALE 2:1	THIRD ANGLE PROJECTION			